



IP VIDEO PRODUCT SELECTION

2020 Ver. H2

Network Cameras / PTZ / NVR / Thermal / Transmission / Display & Control / Accessories / Video Management Software / DORI Distance



CONTENTS



07

NETWORK CAMERAS

Ultra AI 7 Series / Pro AI 5 Series / Lite AI 3 Series / Lite Series

32

NETWORK PTZ CAMERAS

AI Series / Pro Series PTZ Camera / Lite Series PTZ Camera



44

NETWORK VIDEO RECORDERS

AI Series NVR / Lite Series NVR

54

NETWORK THERMAL CAMERAS

Security / Thermography

59

TRANSMISSION

69

DISPLAY & CONTROL

Monitor / LCD Video Wall /
Decoder / Keyboard

75

ACCESSORIES / VIDEO MANAGEMENT SOFTWARE / DORI DISTANCE (D/O/R/I)



AI Core Technologies


SMD

- SMD Plus, short for Smart Motion Detection Plus, analyzes person and vehicle shapes based on motion detection and sends alarms only when a person or vehicle has been detected for intrusion.

- One key to enable Alarm triggered



- False alarm rate < 2% Alarm filtered

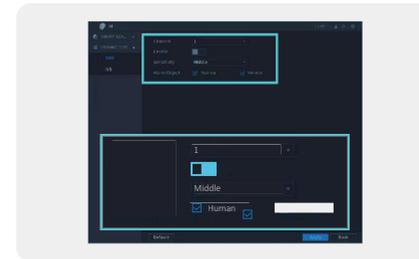

Perimeter Protection

Visible

- The perimeter protection based on tripwire and area intrusion sends an alarm when unwanted movements triggered by human or vehicle occur, avoiding unnecessary false alarm.



Traditional IVS

Causes of false or missed alarms



Perimeter Protection


Alarm will be triggered only when a human or vehicle violates a rule



False alarm rate < 1%

Thermal

- Dahua thermal camera combines thermal imaging technology with AI technology to detect various dangerous situations in time and protect your property from loss.

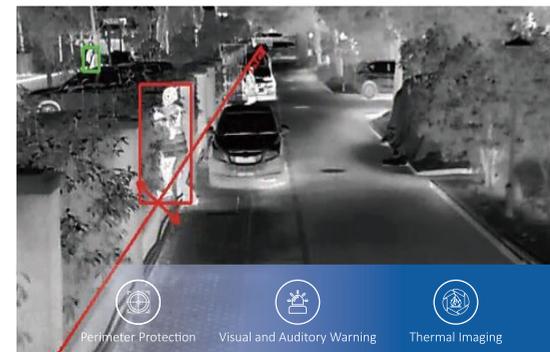




AI Core Technologies

Face Recognition

- The captured facial features will be compared with the face image data in the database. When a successful match is found, the system provides an output result.
- Only needs **60*60 pixels** for FR, provides more accurate comparison results and quicker processing
- Up to **95% accuracy** of face recognition
- Recognition speed:**<1s**

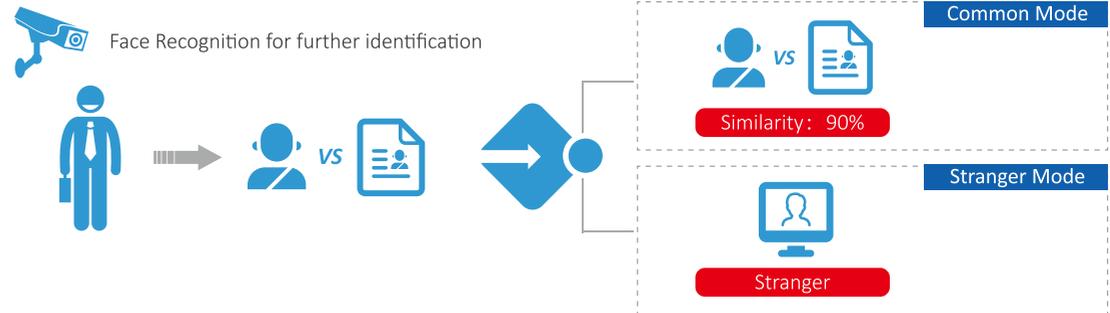

Active Deterrence


- With build-in spotlight and security siren, it can actively warn off intruders and inform user before the user perceives the event.



Video analysis shows there is a human (or vehicle) in the monitored scene



The camera flashes and makes a warning sound to deter the intruder

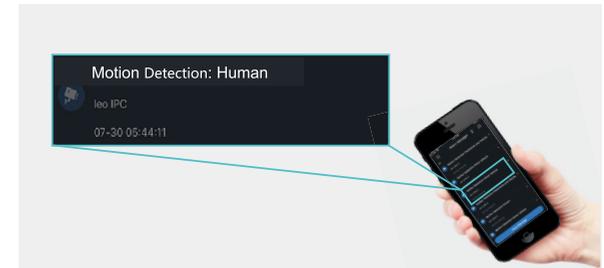

User receives alert by DMSS instantly

Full-color

Dahua Technology's full-color camera captures vivid color information even in low-light conditions. It effectively extracts the color features of scenes – be it human, vehicle or details – in places prone to incidents such as a park at night or a dark alley, providing great help to police officers during the evidence obtaining procedure. In addition, the full-color camera also works with AI functions to further enhance the probability and accuracy of target recognition and feature extraction.



Large Aperture Lens

- F1.0 super aperture collects 2.5 times amount of light compared with F1.6 aperture. More light, brighter image.



High Performance Sensor

- 30% increase in photosensitive capacity using larger sensor.



Advanced ISP

- Dahua ISP 4.0 greatly improves signal-to-noise ratio and color reproduction.



Warm Light

- Blue light weighted radiance is 40% below European Union standards. Lower light pollution, less harm to human eyes.



Full-color Camera
Break The Shadow With Color



Thermal

Thermal camera is the ideal choice for users who require high performance but have limited budget. With its small size and dual spectrum with powerful combination of visible light and thermal imaging, this series integrates advanced Dahua image analysis and intelligent algorithms, providing a one-stop solution for small and medium-sized monitoring applications.



Image Fusion

- Both visible image and thermal image are accurately integrated to produce a new image containing details and temperature information, providing more information that can aid user's decision making.




Smoking Detection

- Dual spectrum combination – the visible light channel detects human (head) and the thermal channel detects cigarettes, eliminating non-target objects such as cigarette lighter or boiled water.



NETWORK CAMERAS



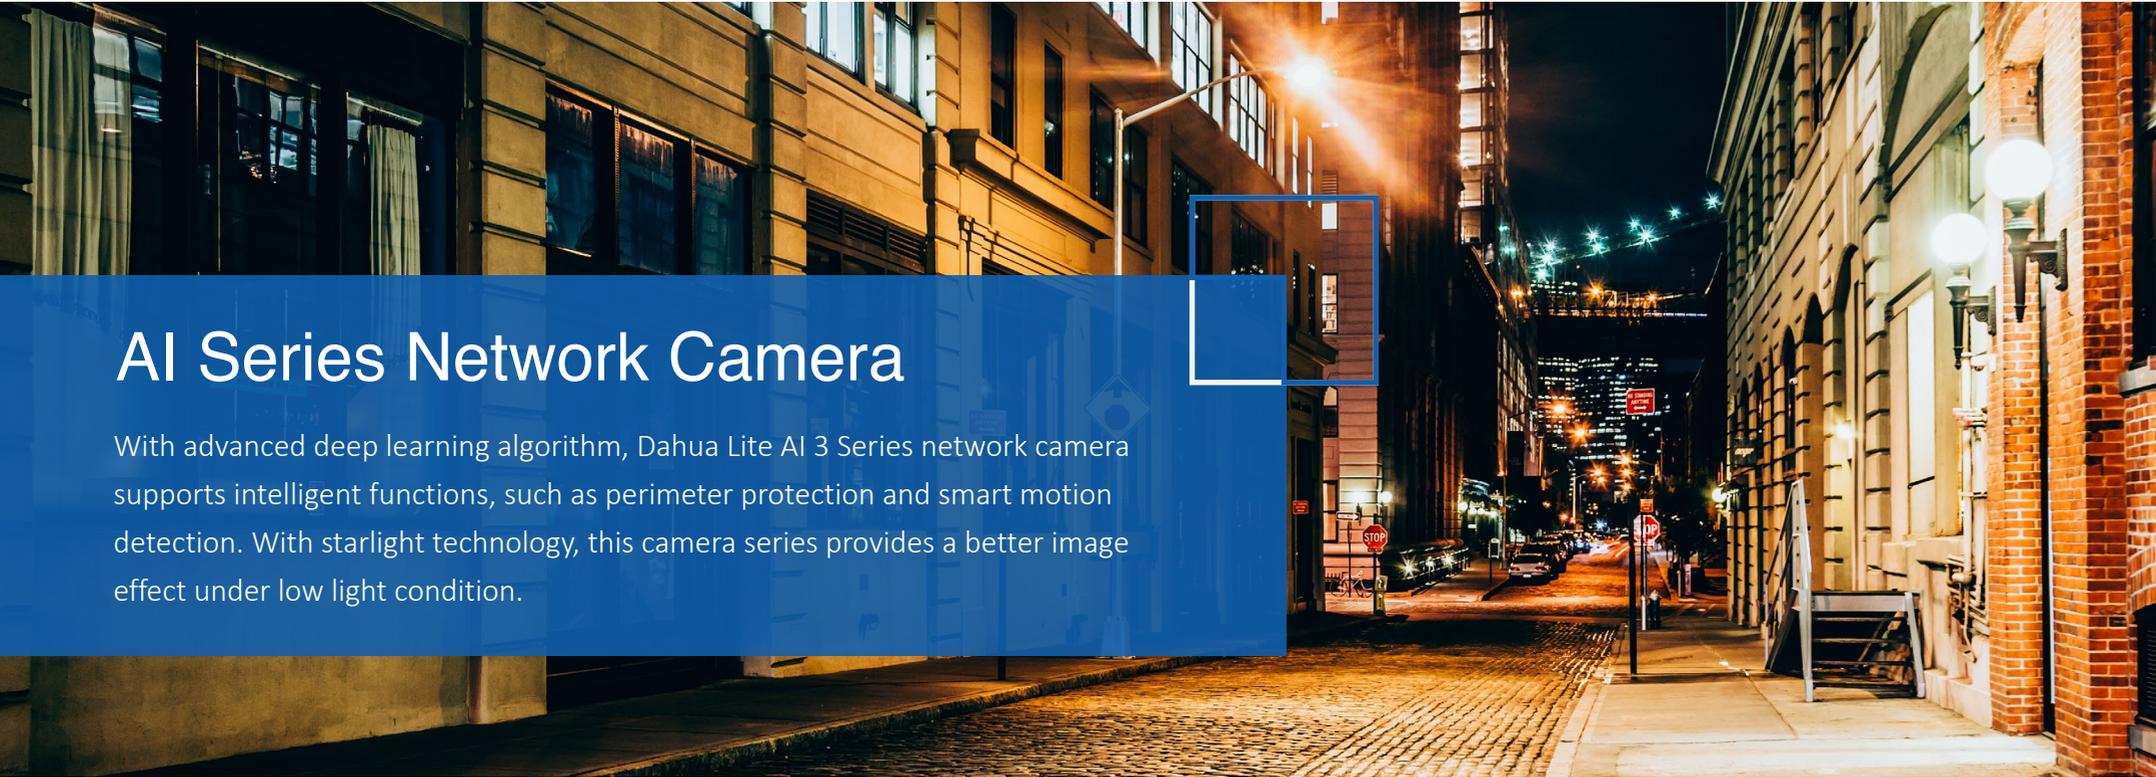

AI Series Network Camera

With advanced deep learning algorithm, Dahua Lite AI 3 Series network camera supports intelligent functions, such as perimeter protection and smart motion detection. With starlight technology, this camera series provides a better image effect under low light condition.



SMD Plus

With intelligent algorithm, Dahua Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.



Perimeter Protection

Supports people and vehicle classification, which significantly improves accuracy, reduces false alarms and decreases pixel count requirements for object detection.



Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, the Dahua Smart Encoding technology offers higher encoding efficiency compared to H.265 and H.264, providing high-quality videos and reduces storage and transmission costs.

NETWORK CAMERAS

Ultra AI 7 Series

Box Camera

Model	IPC-HF71242F	IPC-HF7842F	IPC-HF7442F	IPC-HF7442F-FR
Appearance	  	   	   	   
Image Sensor	1/1.7" 12MP CMOS	1/1.8" 8MP CMOS	1/1.8" 4MP CMOS	1/1.8" 4MP CMOS
Lens	C/CS	C/CS	C/CS	C/CS
FOV-H	--	--	--	--
Min. Illumination	0.01 Lux@F1.8	0.005 Lux@F1.5	0.001 Lux@F1.5	0.001 Lux@F1.5
Day/Night	ICR	ICR	ICR	ICR
WDR	DWDR	120dB	140dB	140 dB
Max. IR Distance	--	--	--	--
Video Compression	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)
Smart Codec	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+
Max. Resolution	12MP (4000×3000)	8MP (3840×2160)	4MP (2688×1520)	4MP (2688×1520)
Frame Rate	25/30fps@12MP	25/30fps@8MP	50/60fps@4MP	50/60fps@4MP
Multi-streaming	5 streams	5 streams	5 streams	5 streams
Pan/Tilt/Rotation	--	--	--	--
Compatibility	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP
Audio In/Out	2/1, Built-in MIC	2/1, Built-in MIC	2/1, Built-in MIC	2/1, Built-in MIC
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	2 channels in: 5mA 3V~5V DC 2 channels out: 1,000mA 30V DC/500mA 50V DC	2 channels in: 5mA 3V DC 2 channels out: 1000mA 30V DC/500mA 50V AC	2 channels in: 5mA 5V DC 2 channels out: 1000mA 30V DC/500mA 50V AC	2 channels in: 5mA 5V DC 2 channels out: 1000mA 30V DC/500mA 50V AC
Ingress Protection	--	--	--	--
Working Temperature	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)
Power	12V DC/24V AC/PoE (802.3af), Max. 12.7W	12V DC/24V AC/POE+ (802.3at), Max. 14.4W	12V DC/24V AC/POE+ (802.3at), Max. 14.4W	12V DC/24V AC/POE+ (802.3at), Max. 14.4W
Artificial Intelligence				
Face Detection	Supported	Supported	Supported	Supported
Face Recognition	--	--	--	Supported
Video Metadata	Supported	Supported	Supported	Supported
Privacy Protection	--	--	Supported	Supported
ANPR	Supported	Supported	Supported	--
Perimeter Protection	Tripwire, intrusion, fast moving (the three functions support the classification and accurate detection of vehicle and human); parking detection, loitering detection, and people gathering.	Tripwire, intrusion, fast moving (the three functions support the classification and accurate detection of vehicle and human); parking detection, loitering detection, and people gathering.	Tripwire, intrusion, fast moving (the three functions support the classification and accurate detection of vehicle and human); parking detection, loitering detection, and people gathering.	Tripwire, intrusion, fast moving (the three functions support the classification and accurate detection of vehicle and human); parking detection, loitering detection, and people gathering.
People Counting	Support 4 tripwire number counting, 4 areas people counting, and 4 queue managements.	Support 4 tripwire number counting, 4 areas people counting, and 4 queue managements.	Support 4 tripwire number counting, 4 areas people counting, and 4 queue managements.	Support 4 tripwire number counting, 4 areas people counting, and 4 queue managements.
Stereo Analysis	--	--	--	--
General Intelligence				
IVS	Object Abandoned/Missing	Object Abandoned/Missing	Object Abandoned/Missing	Object Abandoned/Missing

 • Extended PoE transmission: 800m, 10Mbps, 13w or 300m, 100Mbps, 25.4w
• ePoE only works with ePoE devices

Ultra AI 7 Series

Vari-focal Bullet

Model	IPC-HFW71242H-Z	IPC-HFW7842H-Z	IPC-HFW7842H-Z4	IPC-HFW7442H-Z	IPC-HFW7442H-ZFR
Appearance	 ePoE 4K	 ePoE 4K Starlight+	 ePoE 4K Starlight	 ePoE DHOP Starlight+	 ePoE DHOP Starlight+
Image Sensor	1/1.7" 12MP CMOS	1/1.8" 8MP CMOS	1/1.8" 8MP CMOS	1/1.8" 4MP CMOS	1/1.8" 4MP CMOS
Lens	2.7mm~12mm motorized lens	2.7mm~12mm motorized lens	8mm~32mm motorized lens	2.7mm~12mm motorized lens	2.7mm~12mm motorized lens
FOV-H	103°~44°	114°~47°	40°~15°	114°~47°	114°~47°
Min. Illumination	0.01 Lux@F1.8	0.003 Lux@F1.2	0.005 Lux@F1.26	0.001 Lux@F1.2	0.001 Lux@F1.2
Day/Night	ICR	ICR	ICR	ICR	ICR
WDR	DWDR	120dB	120dB	140dB	140 dB
Max. IR Distance	60m (196.9ft)	60m (196.9ft)	120m (393.70ft)	60m (196.9ft)	60m (196.9ft)
Video Compression	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)
Smart Codec	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+
Max. Resolution	12MP (4000x3000)	8MP (3840x2160)	8MP (3840x2160)	4MP (2688x1520)	4MP (2688x1520)
Frame Rate	25/30fps@12MP	25/30fps@8MP	25/30fps@8MP	50/60fps@4MP	50/60fps@4MP
Multi-streaming	5 streams	5 streams	5 streams	5 streams	5 streams
Pan/Tilt/Rotation	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°
Compatibility	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP
Audio In/Out	1/1	1/1	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	3 channels in: 5mA 3V~5V DC 2 channels out: 1,000mA 30V DC/ 500mA 50V DC	3 channels in: 5mA 5V DC 2 channels out: 1000mA 30V DC/ 500mA 50V AC	3 channels in: 5mA 5V DC 2 channels out: 1000mA 30V DC/ 500mA 50V AC	3 channels in: 5mA 5V DC 2 channels out: 1000mA 30V DC/ 500mA 50V AC	3 channels in: 5mA 5V DC 2 channels out: 1000mA 30V DC/ 500mA 50V AC
Ingress Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Working Temperature	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C ~ +60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F~+140°F)
Power	12V DC/24V AC/POE+ (802.3at), Max. 19.32W	12V DC/24V AC/POE+ (802.3at), Max. 17.3W	12V DC/24V AC/POE+(802.3at), Max. 17.3W	12V DC/24V AC/POE+ (802.3at), Max. 17.3W	12V DC/24V AC/POE+ (802.3at), Max. 17.3W
Artificial Intelligence					
Face Detection	Supported	Supported	Supported	Supported	Supported
Face Recognition	--	--	--	--	Supported
Video Metadata	Supported	Supported	Supported	Supported	Supported
Privacy Protection	--	--	--	Supported	Supported
ANPR	Supported	Supported	Supported	Supported	--
Perimeter Protection	Tripwire, intrusion, fast moving (the three functions support the classification and accurate detection of vehicle and human); parking detection, loitering detection, and people gathering.				
People Counting	Support 4 tripwire number counting, 4 areas people counting , and 4 queue managements.				
Stereo Analysis	--	--	--	--	--
General Intelligence					
IVS	Object Abandoned/Missing	Object Abandoned/Missing	Object Abandoned/Missing	Object Abandoned/Missing	Object Abandoned/Missing

NETWORK CAMERAS

Ultra AI 7 Series

	Vari-focal Bullet		Vari-focal Dome		
Model	IPC-HFW7442H-Z4	IPC-HFW7442H-Z4FR	IPC-HDBW71242H-Z	IPC-HDBW7842H-Z	IPC-HDBW7842H-Z4
Appearance	 ePoE DHOP Starlight+	 ePoE DHOP Starlight+	 ePoE 4K	 ePoE 4K Starlight+	 ePoE 4K Starlight
Image Sensor	1/1.8" 4MP CMOS	1/1.8" 4MP CMOS	1/1.7" 12MP CMOS	1/1.8" 8MP CMOS	1/1.8" 8MP CMOS
Lens	8mm~32mm motorized lens	8mm~32mm motorized lens	2.7mm~12mm motorized lens	2.7mm~12mm motorized lens	8mm~32mm motorized lens
FOV-H	40°~15°	40°~15°	103°~44°	114°~47°	40°~15°
Min. Illumination	0.001 Lux@F1.6	0.001 Lux@F1.6	0.01 Lux@F1.8	0.003 Lux@F1.2	0.005 Lux@F1.6
Day/Night	ICR	ICR	ICR	ICR	ICR
WDR	140dB	140 dB	DWDR	120dB	120dB
Max. IR Distance	120m (393.70ft)	120m (393.70ft)	40m(131.23ft)	40m(131.23ft)	80m (262.5ft)
Video Compression	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)
Smart Codec	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+
Max. Resolution	4MP (2688x1520)	4MP(2688x1520)	12MP (4000x3000)	8MP (3840x2160)	8MP (3840x2160)
Frame Rate	50/60fps@4MP	50/60fps@4MP	25/30fps@12MP	25/30fps@8MP	25/30fps@8MP
Multi-streaming	5 streams	5 streams	5 streams	5 streams	5 streams
Pan/Tilt/Rotation	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~355°; Tilt:0°~80°; Rotation:0°~355°	Pan:0°~355°; Tilt:0°~80°; Rotation:0°~355°	Pan:0°~355°; Tilt:0°~80°; Rotation:0°~355°
Compatibility	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP
Audio In/Out	1/1	1/1	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	3 channels in: 5mA 5V DC 2 channels out: 1000mA 30V DC/ 500mA 50V AC	3 channels in: 5mA 5V DC 2 channels out: 1000mA 30V DC/ 500mA 50V AC	3 channels in: 5mA 3V~5V DC 2 channels out: 1,000mA 30V DC/ 500mA 50V DC	3 channels in: 5mA 5V DC 2 channels out: 1000mA 30V DC/ 500mA 50V AC	3 channels in: 5mA 5V DC 2 channels out: 1000mA 30V DC/ 500mA 50V AC
Ingress Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Working Temperature	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)
Power	12V DC/24V AC/POE+ (802.3at), Max. 17.3W	12V DC/24V AC/POE+ (802.3at), Max. 17.3W	12V DC/24V AC/POE+ (802.3at), Max. 19.32W	12V DC/24V AC/POE+ (802.3at), Max. 16.7W	12V DC/24V AC/POE+(802.3at), Max. 16.7W
Artificial Intelligence					
Face Detection	Supported	Supported	Supported	Supported	Supported
Face Recognition	--	Supported	--	--	--
Video Metadata	Supported	Supported	Supported	Supported	Supported
Privacy Protection	Supported	Supported	--	--	--
ANPR	Supported	--	Supported	Supported	Supported
Perimeter Protection	Tripwire, intrusion, fast moving (the three functions support the classification and accurate detection of vehicle and human); parking detection, loitering detection, and people gathering.				
People Counting	Support 4 tripwire number counting, 4 areas people counting, and 4 queue managements.				
Stereo Analysis	--	--	--	--	--
General Intelligence					
IVS	Object Abandoned/Missing	Object Abandoned/Missing	Object Abandoned/Missing	Object Abandoned/Missing	Object Abandoned/Missing

 • Extended PoE transmission: 800m, 10Mbps, 13w or 300m, 100Mbps, 25.4w
• ePoE only works with ePoE devices

Ultra AI 7 Series

Vari-focal Dome

Model	IPC-HDBW7442H-Z	IPC-HDBW7442H-ZFR	IPC-HDBW7442H-Z4	IPC-HDBW7442H-Z4FR
Appearance	   	   	   	   
Image Sensor	1/1.8" 4MP CMOS	1/1.8" 4MP CMOS	1/1.8" 4MP CMOS	1/1.8" 4MP CMOS
Lens	2.7mm ~12mm motorized lens	2.7mm ~12mm motorized lens	8mm ~32mm motorized lens	8mm ~32mm motorized lens
FOV-H	114°~47°	114°~47°	40°~15°	40°~15°
Min. Illumination	0.001 Lux@F1.2	0.001 Lux@F1.2	0.001 Lux@F1.6	0.001 Lux@F1.6
Day/Night	ICR	ICR	ICR	ICR
WDR	140dB	140 dB	140dB	140 dB
Max. IR Distance	40m(131.23ft)	40m(131.23ft)	80m (262.5ft)	80m (262.5ft)
Video Compression	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)
Smart Codec	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+
Max. Resolution	4MP (2688×1520)	4MP(2688×1520)	4MP (2688×1520)	4MP (2688×1520)
Frame Rate	50/60fps@4MP	50/60fps@4MP	50/60fps@4MP	50/60fps@4MP
Multi-streaming	5 streams	5 streams	5 streams	5 streams
Pan/Tilt/Rotation	Pan:0°~355°; Tilt:0°~80°; Rotation:0°~355°	Pan:0°~355°; Tilt:0°~80°; Rotation:0°~355°	Pan:0°~355°; Tilt:0°~80°; Rotation:0°~355°	Pan:0°~355°; Tilt:0°~80°; Rotation:0°~355°
Compatibility	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P;RTMP
Audio In/Out	1/1	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	3 channels in: 5mA 5V DC; 2 channels out: 1000mA 30V DC/500mA 50V AC	3 channels in: 5mA 5V DC; 2 channels out: 1000mA 30V DC/500mA 50V AC	3 channels in: 5mA 5V DC; 2 channels out: 1000mA 30V DC/500mA 50V AC	3 channels in: 5mA 5V DC; 2 channels out: 1000mA 30V DC/500mA 50V AC
Ingress Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Working Temperature	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)
Power	12V DC/24V AC/POE+ (802.3at), Max. 16.7W	12V DC/24V AC/POE+ (802.3at), Max. 16.7W	12V DC/24V AC/POE+ (802.3at), Max. 16.7W	12V DC/24V AC/POE+ (802.3at), Max. 16.7W
Artificial Intelligence				
Face Detection	Supported	Supported	Supported	Supported
Face Recognition	--	Supported	--	Supported
Video Metadata	Supported	Supported	Supported	Supported
Privacy Protection	Supported	Supported	Supported	Supported
ANPR	Supported	--	Supported	--
Perimeter Protection	Tripwire, intrusion, fast moving (the three functions support the classification and accurate detection of vehicle and human); parking detection, loitering detection, and people gathering.	Tripwire, intrusion, fast moving (the three functions support the classification and accurate detection of vehicle and human); parking detection, loitering detection, and people gathering.	Tripwire, intrusion, fast moving (the three functions support the classification and accurate detection of vehicle and human); parking detection, loitering detection, and people gathering.	Tripwire, intrusion, fast moving (the three functions support the classification and accurate detection of vehicle and human); parking detection, loitering detection, and people gathering.
People Counting	Support 4 tripwire number counting, 4 areas people counting , and 4 queue managements.	Support 4 tripwire number counting, 4 areas people counting , and 4 queue managements.	Support 4 tripwire number counting, 4 areas people counting , and 4 queue managements.	Support 4 tripwire number counting, 4 areas people counting , and 4 queue managements.
Stereo Analysis	--	--	--	--
General Intelligence				
IVS	Object Abandoned/Missing	Object Abandoned/Missing	Object Abandoned/Missing	Object Abandoned/Missing

NETWORK CAMERAS

Pro AI 5 Series

Junction Box Housing

Model	IPC-HFW5842H-ZHE	IPC-HFW5842H-Z4HE	IPC-HFW5442H-ZE/ZHE	IPC-HFW5442H-Z4E	IPC-HFW5242H-Z6E-MF
Appearance	 ePoE 4K Starlight+	 ePoE 4K Starlight	 ePoE DHOP Starlight+	 ePoE DHOP Starlight+	 ePoE DHOP Starlight+
Image Sensor	1/1.8"8Mp CMOS	1/1.8"8Mp CMOS	1/1.8"4Mp CMOS	1/1.8"4Mp CMOS	1/1.8"2Mp CMOS
Lens	2.7~12mm motorized lens	8~32 mm motorized lens	2.7~12 mm motorized lens	8~32 mm motorized lens	8~48 mm motorized lens
FOV-H	114°~47°	40°~15°	107°~44°	42°~15°	42°~10.9°
Min. Illumination	0.003 Lux@F1.2	0.005 Lux@F1.6	0.003Lux@F1.8	0.002 Lux@F1.6	0.002Lux@F1.6
Day/Night	ICR	ICR	ICR	ICR	ICR
WDR	120dB	120dB	140dB	140dB	140dB
Max. IR Distance	60m (196.85ft)	120m (393.7ft)	60m (196.85ft)	120m (393.7ft)	140m (459.3ft)
Video Compression	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H
Smart Codec	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+
Max. Resolution	8MP (3840×2160)	8MP (3840×2160)	4MP (2688×1520)	4MP (2688×1520)	1080P(1920×1080)
Frame Rate	25/30fps@8Mp	25fps/30fps@8Mp	25/30fps@4Mp	25/30fps@4Mp	50/60fps@1080P
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams
Pan/Tilt/Rotation	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°
Compatibility	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI
Audio In/Out	1/1	1/1	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	3 channel In: 5mA 5V DC 2 channel Out: 1000mA 30V DC/500mA 50V AC	3 channel In: 5mA 5V DC 2 channel Out: 1000mA 30V DC/500mA 50V AC	3 channel In: 5mA 5VDC 2 channel Out: 300mA 12VDC	3 channel In: 5mA 5VDC 2 channel Out: 300mA 12VDC	3 channel In: 5mA 5VDC 2 channel Out: 300mA 12VDC
Ingress Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Working Temperature	-40°C~-60°C (-40°F~+140°F)	-40°C~-60°C (-40°F~+140°F)	-30°C~-60°C (-22°F~+140°F) (-ZE) -40°C~60°C (-40°F~+140°F) (-ZHE)	-30°C~-60°C (-22°F~+140°F)	-30°C~-60°C (-22°F~+140°F)
Power	12V DC/24V AC/POE+ (802.3at), Max. 17.3W	12V DC/24V AC/POE+ (802.3at), Max. 17.3W	DC12V, PoE (802.3af), Max. 11.6W (-ZE); DC12V, PoE (802.3af), Max. 11.6W (-ZHE)	DC12V, PoE (802.3af), Max. 11.6W	DC12V, PoE (802.3af), Max. 11.6W
Artificial Intelligence					
Face Detection	Supported	Supported	Supported	Supported	Supported
Face Attributes	Support 6 kinds of face attributes extraction: Age, Gender, Expression (Jolly, Surprise, Normal, Rage, Sad, Disgusted, Confused, Frightened), Glasses, Mouth Mask, Moustache & Beard				
Perimeter Protection	Tripwire, Intrusion, Fast moving (the three functions support the classification and accurate detection of vehicle and human), Parking Detection, Loitering Detection, and People Gathering.				
People Counting	Support Line crossing/Region/Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection				
General Intelligence					
IVS	Object Abandoned/Missing	Object Abandoned/Missing	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map

ePoE • Extended PoE transmission: 800m, 10Mbps, 13w or 300m, 100Mbps, 25.4w
• ePoE only works with ePoE devices

Pro AI 5 Series

Junction Box Housing

Model	IPC-HDBW5842H-ZHE	IPC-HDBW5842H-Z4HE	IPC-HDBW5442H-ZE/ZHE	IPC-HDBW5442H-Z4E	IPC-HDBW5242H-Z6E-MF
Appearance	 4K Starlight+	 4K Starlight	 DHOP Starlight+	 DHOP Starlight+	 DHOP Starlight+
Image Sensor	1/1.8" 8Mp CMOS	1/1.8" 8Mp CMOS	1/1.8" 4Mp CMOS	1/1.8" 4Mp CMOS	1/1.8" 2Mp CMOS
Lens	2.7 mm~12.0mm motorized lens	8~32 mm motorized lens	2.7~12 mm motorized lens	8~32 mm motorized lens	8~48 mm motorized lens
FOV-H	114°~47°	40°~15°	107°~44°	42°~15°	42°~10.9°
Min. Illumination	0.003 Lux@F1.2	0.005 Lux@F1.6	0.003 Lux@F1.8	0.002 Lux@F1.6	0.002 Lux@F1.6
Day/Night	ICR	ICR	ICR	ICR	ICR
WDR	120 dB	120dB	140dB	140dB	140dB
Max. IR Distance	40 m (131.23ft)	80m (262.5ft)	40m (131.2ft)	80m (262.5ft)	100m (328.1ft)
Video Compression	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H
Smart Codec	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+
Max. Resolution	8MP (3840×2160)	8MP (3840×2160)	4MP (2688×1520)	4MP (2688×1520)	1080P (1920×1080)
Frame Rate	25 fps/30 fps@8Mp	25fps/30fps@8Mp	25/30fps@4Mp	25/30fps@4Mp	50/60fps@1080P
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams
Pan/Tilt/Rotation	Pan:0°~355°; Tilt:0°~80° Rotation:0°~355°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan: 0°~355°; Tilt: 0°~80° Rotation: 0°~355°	Pan: 0°~355°; Tilt: 0°~80° Rotation: 0°~355°	Pan: 0°~355°; Tilt: 0°~80° Rotation: 0°~355°
Compatibility	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G&T, CGI
Audio In/Out	1/1	1/1	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	3 channel In: 5mA 5V DC 2 channel Out: 1000mA 30V DC/500mA 50V AC	3 channel In: 5mA 5V DC 2 channel Out: 1000mA 30V DC/500mA 50V AC	3 channel In: 5mA 5VDC 2 channel Out: 300mA 12VDC	3 channel In: 5mA 5VDC 2 channel Out: 300mA 12VDC	3 channel In: 5mA 5VDC 2 channel Out: 300mA 12VDC
Ingress Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Working Temperature	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-30°C~+60°C (-22°F~+140°F) (-ZE) -40°C~+60°C (-40°F~+140°F) (-ZHE)	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)
Power	12V DC/24V AC/PoE+ (802.3af), Max. 15.7W	12V DC/24V AC/POE+ (802.3af), Max. 16.7W	DC12V, PoE (802.3af), Max. 11.9W(-ZE) DC12V, PoE (802.3af), Max. 11.9W (-ZHE)	DC12V, PoE (802.3af), Max. 11.9W	DC12V, PoE (802.3af), Max. 11.9W
Artificial Intelligence					
Face Detection	Supported	Supported	Supported	Supported	Supported
Face Attributes	Support 6 kinds of face attributes extraction: Age, Gender, Expression (Jolly, Surprise, Normal, Rage, Sad, Disgusted, Confused, Frightened), Glasses, Mouth Mask, Moustache & Beard				
Perimeter Protection	Tripwire, intrusion, fast moving (the three functions support the classification and accurate detection of vehicle and human), parking detection, loitering detection, and People Gathering.				
People Counting	Support Line crossing/Region/Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection				
General Intelligence					
IVS	Object Abandoned/Missing	Object Abandoned/Missing	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map

NETWORK CAMERAS

Pro AI 5 Series

Box Camera

Model	IPC-HF5541E-E	IPC-HF5442E-E	IPC-HF5241E-E
Appearance	 	 	 
Image Sensor	1/2.7" 5MP CMOS	1/1.8" 4MP CMOS	1/2.8" 2MP STARVIS™ CMOS
Lens	C/CS	C/CS	C/CS
FOV-H	--	--	--
Min. Illumination	0.005 Lux@F1.7	0.002 Lux@F1.5	0.002 Lux@F1.5
Day/Night	ICR	ICR	ICR
WDR	120dB	140dB	120dB
Max. IR Distance	--	--	--
Video Compression	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H
Smart Codec	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+
Max. Resolution	5MP (2592x1944)	4MP (2688x1520)	1080P (1920x1080)
Frame Rate	20fps@5Mps	25/30fps@4Mps	25/30fps@1080P
Multi-streaming	3 streams	3 streams	3 streams
Pan/Tilt/Rotation	--	--	--
Compatibility	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI
Audio In/Out	1/1, Built-in MIC	1/1, Built-in MIC	1/1, Built-in MIC
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	2 channel In: 5mA 5VDC 1 channel Out: 1A 30VDC / 0.5A 50VAC	2 channel In: 5mA 5VDC 1 channel Out: 1A 30VDC / 0.5A 50VAC	2 channel In: 5mA 5VDC 1 channel Out: 1A 30VDC / 0.5A 50VAC
Ingress Protection	--	--	--
Working Temperature	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)
Power	DC12V/AC24V, PoE (802.3af), Max. 9.2W	DC12V/AC24V, PoE (802.3af), Max. 9.2W	DC12V/AC24V, PoE (802.3af), Max. 9.5W
Artificial Intelligence			
Face Detection	Supported	Supported	Supported
Face Attributes	Support 6 kinds of face attributes extraction: Age, Gender, Expression (Jolly, Surprise, Normal, Rage, Sad, Disgusted, Confused, Frightened), Glasses, Mouth Mask, Moustache & Beard	Support 6 kinds of face attributes extraction: Age, Gender, Expression (Jolly, Surprise, Normal, Rage, Sad, Disgusted, Confused, Frightened), Glasses, Mouth Mask, Moustache & Beard	Support 6 kinds of face attributes extraction: Age, Gender, Expression (Jolly, Surprise, Normal, Rage, Sad, Disgusted, Confused, Frightened), Glasses, Mouth Mask, Moustache & Beard
Perimeter Protection	Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection; people gathering; parking detection		
People Counting	Support Line crossing/Region/Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection		
General Intelligence			
IVS	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map

 • Extended PoE transmission: 800m, 10Mbps, 13w or 300m, 100Mbps, 25.4w
• ePoE only works with ePoE devices

Pro AI 5 Series

Vari-focal Bullet

Model	IPC-HFW5541E-ZE	IPC-HFW5541E-Z5E	IPC-HFW5442E-ZE	IPC-HFW5442E-Z4E
Appearance	  	  	  	  
Image Sensor	1/2.7" 5MP CMOS	1/2.7" 5MP CMOS	1/1.8" 4MP CMOS	1/1.8" 4Mp CMOS
Lens	2.7mm ~13.5mm motorized lens	7mm ~35mm motorized lens	2.7mm ~12mm motorized lens	8 mm ~32 mm motorized lens
FOV-H	100°~28°(2592×1944) 104°~29°(2688×1520)	31°~9°(2592×1944) 32°~9°(2688×1520)	114°~47°	43°~15°
Min. Illumination	0.005 Lux@F1.5	0.003 Lux@F1.3	0.003 Lux@F1.8	0.002 Lux@F1.6
Day/Night	ICR	ICR	ICR	ICR
WDR	120dB	120dB	140dB	140dB
Max. IR Distance	50m (164ft)	120 m (394ft)	50m (164ft)	120 m (394ft)
Video Compression	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H
Smart Codec	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+
Max. Resolution	5MP (2592×1944)	5MP (2592×1944)	4MP (2688×1520)	4MP (2688×1520)
Frame Rate	20fps@5Mp	20fps@5Mp	25/30fps@4Mp	25/30fps@4Mp
Multi-streaming	3 streams	3 streams	3 streams	3 streams
Pan/Tilt/Rotation	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°
Compatibility	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G&T, CGI	ONVIF Profile S, G & T, CGI
Audio In/Out	1/1	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	2 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	2 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	2 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	2 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC
Ingress Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Working Temperature	-30°C~+60°C(-22°F~+140°F)	-30°C~+60°C(-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)
Power	DC12V, PoE (802.3af), Max. 10.9W	DC12V, PoE (802.3af), Max. 10.9W	DC12V, PoE (802.3af), Max. 10.9W	DC12V, PoE (802.3af), Max. 10.9W
Artificial Intelligence				
Face Detection	Supported	Supported	Supported	Supported
Face Attributes	Support 6 kinds of face attributes extraction: Age, Gender, Expression (Jolly, Surprise, Normal, Rage, Sad, Disgusted, Confused, Frightened), Glasses, Mouth Mask, Moustache & Beard		Support 6 kinds of face attributes extraction: Age, Gender, Expression (Jolly, Surprise, Normal, Rage, Sad, Disgusted, Confused, Frightened), Glasses, Mouth Mask, Moustache & Beard	
Perimeter Protection	Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection; people gathering; parking detection	Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection; people gathering; parking detection	Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection; people gathering; parking detection	Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection; people gathering; parking detection
People Counting	Support Line crossing/Region/ Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection	Support Line crossing/Region/ Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection	Support Line crossing/Region/ Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection	Support Line crossing/Region/ Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection
General Intelligence				
IVS	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map

NETWORK CAMERAS

Pro AI 5 Series

Vari-focal Bullet			
Model	IPC-HFW5241E-ZE	IPC-HFW5241E-Z5E	IPC-HFW5241E-Z12E
Appearance	 	 	 
Image Sensor	1/2.8" 2MP STARVIS™ CMOS	1/2.8" 2MP STARVIS™ CMOS	1/2.8" 2MP STARVIS™ CMOS
Lens	2.7mm ~13.5mm motorized lens	7mm ~35mm motorized lens	5.3 mm~64.0 mm motorized lens
FOV-H	109°~30°	33°~10°	58°~4°
Min. Illumination	0.002 Lux@F1.5	0.0015 Lux@F1.3	0.002 Lux@F1.5
Day/Night	ICR	ICR	ICR
WDR	120dB	120dB	120dB
Max. IR Distance	50m (164ft)	120m (394ft)	150 m (492ft)
Video Compression	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H
Smart Codec	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+
Max. Resolution	1080P (1920×1080)	1080P(1920×1080)	1080P (1920×1080)
Frame Rate	25/30fps@1080P	25/30fps@1080P	25/30fps@1080P
Multi-streaming	3 streams	3 streams	3 streams
Pan/Tilt/Rotation	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°
Compatibility	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI
Audio In/Out	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	2 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	2 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	2 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC
Ingress Protection	IP67, IK10	IP67, IK10	IP67, IK10
Working Temperature	-30°C~+60°C(-22°F ~ +140°F)	-30°C~+60°C(-22°F ~ +140°F)	-30°C~+60°C(-22°F ~ +140°F)
Power	DC12V, PoE (802.3af),Max. 10.3W	DC12V, PoE (802.3af), Max. 10.3W	DC12V, PoE (802.3af), Max. 10.3W
Artificial Intelligence			
Face Detection	Supported	Supported	Supported
Face Attributes	Support 6 kinds of face attributes extraction: Age, Gender, Expression (Jolly, Surprise, Normal, Rage, Sad, Disgusted, Confused, Frightened), Glasses, Mouth Mask, Moustache & Beard		Support 6 kinds of face attributes extraction: Age, Gender, Expression (Jolly, Surprise, Normal, Rage, Sad, Disgusted, Confused, Frightened), Glasses, Mouth Mask, Moustache & Beard
Perimeter Protection	Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection; people gathering; parking detection		Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection; people gathering; parking detection
People Counting	Support Line crossing/Region/ Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection		Support Line crossing/Region/ Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection
General Intelligence			
IVS	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map

 • Extended PoE transmission: 800m, 10Mbps, 13w or 300m, 100Mbps, 25.4w
• ePoE only works with ePoE devices

Pro AI 5 Series

Vari-focal Dome

Model	IPC-HDBW5541E-ZE	IPC-HDBW5541E-Z5E	IPC-HDBW5442E-ZE	IPC-HDBW5442E-Z4E	IPC-HDBW5241E-ZE	IPC-HDBW5241E-Z5E
Appearance						
Image Sensor	1/2.7" 5MP CMOS	1/2.7" 5MP CMOS	1/1.8" 4MP CMOS	1/1.8" 4Mp CMOS	1/2.8" 2MP STARVIS™ CMOS	1/2.8" 2MP STARVIS™ CMOS
Lens	2.7mm ~13.5mm motorized lens	7mm ~35mm motorized lens	2.7mm ~12mm motorized lens	8mm ~32mm motorized lens	2.7mm ~13.5mm motorized lens	7mm ~35mm motorized lens
FOV-H	100°~28° (2592×1944) ; 104°~29° (2688×1520)	31°~9° (2592×1944) ; 32°~9° (2688×1520)	114°~47°	43°~15°	109°~30°	33°~10°
Min. Illumination	0.005 Lux@F1.5	0.003 Lux@F1.3	0.003 Lux@F1.8	0.002 Lux@F1.6	0.002 Lux@F1.5	0.0015 Lux@F1.3
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR
WDR	120dB	120dB	140dB	140dB	120dB	120dB
Max. IR Distance	40m (131ft)	80m (262ft)	40m (131ft)	80m (262ft)	40m (131ft)	80m (262ft)
Video Compression	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H
Smart Codec	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+
Max. Resolution	5MP (2592×1944)	5MP (2592×1944)	4MP (2688×1520)	4MP (2688×1520)	1080P (1920×1080)	1080P (1920×1080)
Frame Rate	20fps@5Mp	20fps@5Mp	25/30fps@4Mp	25/30 fps@4Mp	25/30fps@1080P	25/30fps@1080P
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams	3 streams
Pan/Tilt/Rotation	Pan:0°~355°; Tilt:0°~65° Rotation:0°~355°	Pan:0°~355°; Tilt:0°~65° Rotation:0°~355°	Pan:0°~355°; Tilt:0°~65° Rotation:0°~355°	Pan:0°~355°; Tilt:0°~65°; Rotation:0°~355°	Pan:0°~355°; Tilt:0°~65°; Rotation:0°~355°	Pan:0°~355°; Tilt:0°~65°; Rotation:0°~355°
Compatibility	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI
Audio In/Out	1/1	1/1	1/1	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC
Ingress Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Working Temperature	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)
Power	DC12V/AC24V, PoE (802.3af) Max. 12.4W	DC12V/AC24V, PoE (802.3af) Max. 12.4W	DC12V/AC24V, PoE (802.3af), Max. 12.4W	DC12V/AC24V, PoE (802.3af), Max. 12.4W	DC12V/AC24V, PoE (802.3af), Max. 11.8W	DC12V/AC24V, PoE (802.3af), Max. 11.8W
Artificial Intelligence						
Face Detection	Supported	Supported	Supported	Supported	Supported	Supported
Face Attributes	Support 6 kinds of face attributes extraction: Age, Gender, Expression (Jolly, Surprise, Normal, Rage, Sad, Disgusted, Confused, Frightened), Glasses, Mouth Mask, Moustache & Beard			Support 6 kinds of face attributes extraction: Age, Gender, Expression (Jolly, Surprise, Normal, Rage, Sad, Disgusted, Confused, Frightened), Glasses, Mouth Mask, Moustache & Beard		
Perimeter Protection	Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection; people gathering; parking detection			Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection; people gathering; parking detection		
People Counting	Support Line crossing/Region/Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection			Support Line crossing/Region/Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection		
General Intelligence						
IVS	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map

NETWORK CAMERAS

Pro AI 5 Series

Vari-focal Eyeball

Model	IPC-HDW5541T-ZE	IPC-HDW5442T-ZE	IPC-HDW5241T-ZE
Appearance	   	   	   
Image Sensor	1/2.7"5MP CMOS	1/1.8"4MP CMOS	1/2.8"2MP CMOS
Lens	2.7 mm-13.5 mm motorized lens	2.7 mm-12 mm motorized lens	2.7 mm-13.5 mm motorized lens
FOV-H	100°~28° (2592×1944); 104°~29° (2688×1520)	114°~47°	109°~30°
Min. Illumination	0.005 Lux @F1.5	0.003 Lux @F1.8	0.002 Lux @F1.5
Day/Night	ICR	ICR	ICR
WDR	120dB	140dB	120dB
Max. IR Distance	40m (131.2ft)	40m (131.2ft)	40m (131.2ft)
Video Compression	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H
Smart Codec	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+
Max. Resolution	5MP (2592×1944)	4MP (2688×1520)	1080P (1920×1080)
Frame Rate	20fps@5MP	25/30fps@4MP	25/30 fps@1080P
Multi-streaming	3 streams	3 streams	3 streams
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~78°; Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~78°; Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~78°; Rotation: 0°~360°
Compatibility	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI
Audio In/Out	Built-in MIC	Built-in MIC	Built-in MIC
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	--	--	--
Ingress Protection	IP67	IP67	IP67
Working Temperature	-30° C ~ +60° C (-22° F ~ +140° F)	-30° C ~ +60° C (-22° F ~ +140° F)	-30° C ~ +60° C (-22° F ~ +140° F)
Power	DC12V, PoE (802.3af), Max. 7.7W	DC12V, PoE (802.3af), Max. 7.5W	DC12V, PoE (802.3af), Max. 6.9W
Artificial Intelligence			
Face Detection	Supported	Supported	Supported
Face Attributes	Support 6 kinds of face attributes extraction: Age, Gender, Expression (Jolly, Surprise, Normal, Rage, Sad, Disgusted, Confused, Frightened), Glasses, Mouth Mask, Moustache & Beard		
Perimeter Protection	Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection; people gathering; parking detection		
People Counting	Support Line crossing/Region/Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection	Support Line crossing/Region/Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection	Support Line crossing/Region/Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection
General Intelligence			
IVS	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map

 • Extended PoE transmission: 800m, 10Mbps, 13w or 300m, 100Mbps, 25.4w
• ePoE only works with ePoE devices

Pro AI 5 Series

	Fixed-focal Mini-Bullet			Fixed-focal Bullet		
Model	IPC-HFW5541E-SE	IPC-HFW5442E-SE	IPC-HFW5241E-SE	IPC-HFW5541T-SE	IPC-HFW5541T-ASE	IPC-HFW5442T-SE
Appearance	 ePoE DHOP Starlight	 ePoE DHOP Starlight+	 ePoE DHOP Starlight+	 ePoE DHOP Starlight	 ePoE DHOP Starlight	 ePoE DHOP Starlight+
Image Sensor	1/2.7" 5MP CMOS	1/1.8" 4MP CMOS	1/2.8" 2MP STARVIS™ CMOS	1/2.7" 5MP CMOS	1/2.7" 5MP CMOS	1/1.8" 4MP CMOS
Lens	2.8mm fixed lens (3.6mm/6mm optional)	2.8mm fixed lens (3.6mm/6mm optional)	2.8mm fixed lens (3.6mm/6mm optional)	2.8mm fixed lens (3.6mm, 6mm, 8mm, 12mm optional)	2.8mm fixed lens (3.6mm, 6mm, 8mm, 12mm optional)	2.8mm fixed lens (3.6mm/6mm optional)
FOV-H	102°/84°/51°	113°/89°/56°	106°/87°/53°	102°/84°/51°/38°/25°	102°/84°/51°/38°/25°	113°/89°/56°
Min. Illumination	0.005 Lux@F1.6	0.002 Lux@F1.6	0.002 Lux@F1.6	0.005 Lux@F1.6	0.005 Lux@F1.6	0.002 Lux@F1.6
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR
WDR	120dB	140dB	120dB	120dB	120dB	140dB
Max. IR Distance	50m (164ft)	50m (164ft)	50m (164ft)	80m (262ft)	80m (262ft)	50m (164ft)
Video Compression	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H
Smart Codec	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+
Max. Resolution	5MP (2592x1944)	4MP (2688x1520)	1080P (1920x1080)	5MP (2592x1944)	5MP (2592x1944)	4MP (2688x1520)
Frame Rate	20fps@5Mp	25/30fps@4Mp	25/30fps@1080P	20fps@5Mp	20fps@5Mp	25/30fps@4Mp
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams	3 streams
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°
Compatibility	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI
Audio In/Out	--	--	--	--	1/1	--
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	--	--	--	--	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	--
Ingress Protection	IP67	IP67	IP67	IP67, IK10	IP67, IK10	IP67, IK10
Working Temperature	-40° C ~ +60° C (-40° F ~ +140° F)	-40° C ~ +60° C (-40° F ~ +140° F)	-40° C ~ +60° C (-40° F ~ +140° F)	-40° C ~ +60° C (-40° F ~ +140° F)	-40° C ~ +60° C (-40° F ~ +140° F)	-40° C ~ +60° C (-40° F ~ +140° F)
Power	DC12V, PoE (802.3af), Max. 6.8W	DC12V, PoE (802.3af), Max. 6.8W	DC12V, PoE (802.3af), Max. 6.8W	DC12V, PoE (802.3af), Max. 8.4W	DC12V, PoE (802.3af), Max. 9.5W	DC12V, PoE (802.3af), Max. 8.4W
Artificial Intelligence						
Face Detection	Supported	Supported	Supported	Supported	Supported	Supported
Face Attributes	--	--	--	--	--	--
Perimeter Protection	Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection; people gathering; parking detection					
People Counting	Support Line crossing/Region/Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection					
General Intelligence						
IVS	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map

NETWORK CAMERAS

Pro AI 5 Series

	Fixed-focal Bullet			Fixed-focal Dome		
Model	IPC-HFW5442T-ASE	IPC-HFW5241T-SE	IPC-HFW5241T-ASE	IPC-HDBW5541R-ASE	IPC-HDBW5442R-ASE	IPC-HDBW5241R-ASE
Appearance						
Image Sensor	1/1.8" 4MP CMOS	1/2.8" 2MP STARVIS™ CMOS	1/2.8" 2MP STARVIS™ CMOS	1/2.7" 5MP CMOS	1/1.8" 4Mp CMOS	1/2.8" 2MP STARVIS™ CMOS
Lens	2.8mm fixed lens (3.6mm/6mm optional)	2.8mm fixed lens (3.6mm, 6mm, 8mm, 12mm optional)	2.8mm fixed lens (3.6mm, 6mm, 8mm, 12mm optional)	2.8mm fixed lens (3.6mm/6mm optional)	2.8mm fixed lens (3.6mm/6mm optional)	2.8mm fixed lens (3.6mm/6mm optional)
FOV-H	113°/89°/56°	106°/87°/53°/41°/26°	106°/87°/53°/41°/26°	102°/84°/51°	113°/89°/56°	106°/87°/53°
Min. Illumination	0.002 Lux@F1.6	0.002 Lux@F1.6	0.002 Lux@F1.6	0.005 Lux@F1.6	0.002 Lux@F1.6	0.002 Lux@F1.6
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR
WDR	140dB	120dB	120dB	120dB	140dB	120dB
Max. IR Distance	50m (164ft)	80m (262ft)	80m (262ft)	50m (164ft)	50 m (164 ft)	50 m (164 ft)
Video Compression	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H
Smart Codec	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+
Max. Resolution	4MP (2688x1520)	1080P (1920x1080)	1080P (1920x1080)	5MP (2592x1944)	4MP (2688x1520)	1080P (1920x1080)
Frame Rate	25/30fps@4Mp	25/30fps@1080P	25/30fps@1080P	20fps@5Mp	25/30fps@4Mp	25/30fps@1080P
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams	3 streams
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°	Pan: 0°~355°; Tilt: 0°~75°; Rotation: 0°~355°	Pan: 0°~355°; Tilt: 0°~75°; Rotation: 0°~355°	Pan: 0°~355°; Tilt: 0°~75°; Rotation: 0°~355°
Compatibility	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI
Audio In/Out	1/1	--	1/1	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	--	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC
Ingress Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Working Temperature	-40° C ~ +60° C (-40° F ~ +140° F)	-40° C ~ +60° C (-40° F ~ +140° F)	-40° C ~ +60° C (-40° F ~ +140° F)	-40° C ~ +60° C (-40° F ~ +141° F)	-40° C ~ +60° C (-40° F ~ +143° F)	-40° C ~ +60° C (-40° F ~ +145° F)
Power	DC12V, PoE (802.3af), Max. 9.5W	DC12V, PoE (802.3af), Max. 8.3W	DC12V, PoE (802.3af), Max. 8.7W	DC12V, PoE (802.3af), Max. 6W	DC12V, PoE (802.3af), Max. 6.1W	DC12V, PoE (802.3af), Max. 5.5W
Artificial Intelligence						
Face Detection	Supported	Supported	Supported	Supported	Supported	Supported
Face Attributes	--	--	--	--	--	--
Perimeter Protection	Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection; people gathering; parking detection					
People Counting	Support Line crossing/Region/Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection					
vGeneral Intelligence						
IVS	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map

 • Extended PoE transmission: 800m, 10Mbps, 13w or 300m, 100Mbps, 25.4w
• ePoE only works with ePoE devices

Pro AI 5 Series

Fixed-focal Eyeball

Model	IPC-HDW5541TM-ASE	IPC-HDW5442TM-ASE	IPC-HDW5241TM-ASE
Appearance	   	   	   
Image Sensor	1/2.7" 5MP CMOS	1/1.8" 4MP CMOS	1/2.8" 2MP STARVIS™ CMOS
Lens	2.8mm fixed lens (3.6mm, 6mm optional)	2.8mm fixed lens (3.6mm/6mm optional)	2.8mm fixed lens (3.6mm, 6mm optional)
FOV-H	102°/84°/51°	113°/89°/56°	106°/87°/53°
Min. Illumination	0.005 Lux@F1.6	0.002 Lux@F1.6	0.002 Lux@F1.6
Day/Night	ICR	ICR	ICR
WDR	120dB	140dB	120dB
Max. IR Distance	50m (164ft)	50m (164ft)	50m (164ft)
Video Compression	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H
Smart Codec	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+
Max. Resolution	5MP (2592x1944)	4MP (2688x1520)	1080P (1920x1080)
Frame Rate	20fps@5Mps	25/30fps@4Mps	25/30fps@1080P
Multi-streaming	3 streams	3 streams	3 streams
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~78°; Rotation: 0°~360°	Pan:0°~360°; Tilt:0°~78°; Rotation:0°~360°	Pan: 0°~360°; Tilt: 0°~78°; Rotation: 0°~360°
Compatibility	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI
Audio In/Out	Built-in MIC	Built-in MIC	Built-in MIC
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	--	--	--
Ingress Protection	IP67	IP67	IP67
Working Temperature	-40°C~+60°C (-40°F~+145°F)	-40°C~+60°C (-40°F~+146°F)	-40°C~+60°C (-40°F~+147°F)
Power	DC12V, PoE (802.3af), Max. 7.2W	DC12V, PoE (802.3af), Max. 7.2W	DC12V, PoE (802.3af), Max. 6.8W
Artificial Intelligence			
Face Detection	Supported	Supported	Supported
Face Attributes	--	--	--
Perimeter Protection	Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection; people gathering; parking detection		
People Counting	Support Line crossing/Region/Queueing people counting Support 4 accesses independent detection, 4 areas independent detection		
General Intelligence			
IVS	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map

NETWORK CAMERAS

Pro AI 5 Series

Full-color

Model	IPC-HFW5449T-ASE-NI	IPC-HFW5249T-ASE-NI	IPC-HDBW5449R-ASE-NI	IPC-HDBW5249R-ASE-NI
Appearance	 ePoE DHOP Full-color	 ePoE DHOP Full-color	 ePoE DHOP Full-color	 ePoE DHOP Full-color
Image Sensor	1/1.8" 4MP CMOS	1/2.8" 2MP CMOS	1/1.8" 4MP CMOS	1/2.8" 2MP CMOS
Lens	3.6mm fixed lens	3.6mm fixed lens	3.6mm fixed lens	3.6mm fixed lens
FOV-H	93°	88°	93°	88°
Min. Illumination	0.001Lux@F1.0	0.001Lux@F1.0	0.001Lux@ F1.0	0.001Lux@ F1.0
Day/Night	Electronic	Color/B/W	Electronic	Color/B/W
WDR	140dB	120dB	140dB	120dB
Max. IR Distance	--	--	--	--
Video Compression	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H	H.265/H.264/H.264B/H.264H
Smart Codec	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+	Smart H.265+/H.264+
Max. Resolution	4MP (2688×1520)	1080P (1920×1080)	4MP (2688×1520)	1080P (1920×1080)
Frame Rate	25/30fps@4Mp	25/30fps@2Mp	25/30fps@4Mp	25/30fps@2Mp
Multi-streaming	3 streams	3 streams	3 streams	3 streams
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°	Pan: 0°~355°; Tilt: 0°~75°; Rotation: 0°~355°	Pan: 0°~355°; Tilt: 0°~75°; Rotation: 0°~355°
Compatibility	ONVIF Profile S, G&T, CGI	ONVIF Profile S, G&T, CGI	ONVIF Profile S, G & T, CGI	ONVIF Profile S, G & T, CGI
Audio In/Out	1/1	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC
Ingress Protection	IP67	IP67	IP67, IK10	IP67, IK10
Working Temperature	-40° C ~ +60° C (-40° F ~ +147° F)	-40°C~+60°C (-40°F~+147°F)	-40°C~+60°C (-40°F~+147°F)	-40°C~+60°C (-40°F~+147°F)
Power	DC12V, PoE (802.3af), Max. 4.4W	DC12V, PoE (802.3af), Max. 3.8W	DC12V, PoE (802.3af), Max. 4.4W	DC12V, PoE (802.3af), Max. 3.8W
Artificial Intelligence				
Face Detection	Supported	Supported	Supported	Supported
Face Attributes	--	--	--	--
Perimeter Protection	Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection; people gathering; parking detection			
People Counting	Support Line crossing/Region/Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection			
General Intelligence				
IVS	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map	Object Abandoned/Missing Heat Map

 • Extended PoE transmission: 800m, 10Mbps, 13w or 300m, 100Mbps, 25.4w
• ePoE only works with ePoE devices

Lite AI 3 Series

	Vari-focal Bullet		Vari-focal Dome		Vari-focal Eyeball
Model	IPC-HFW3541T-ZAS	IPC-HFW3241T-ZAS	IPC-HDBW3541R-ZAS	IPC-HDBW3241R-ZAS	IPC-HDW3541T-ZAS
Appearance	 Starlight	 Starlight+	 Starlight	 Starlight+	 Starlight
Image Sensor	1/2.7" 5Mp CMOS	1/2.8" 2Mp CMOS	1/2.7" 5Mp CMOS	1/2.8" 2Mp CMOS	1/2.7" 5Mp CMOS
Focal Length	2.7mm~13.5mm motorized lens				
FOV-H	99°~26°	108°~28°	99°~26°	108°~28°	99°~26°
Min. Illumination	0.005Lux@F1.5	0.002Lux@F1.5	0.005 Lux@F1.5	0.002 Lux@F1.5	0.005 Lux@F1.5
Day/Night	ICR	ICR	ICR	ICR	ICR
WDR	120dB	120dB	120dB	120dB	120dB
Max. IR Distance	60m (197.0 ft)	60m (197.0ft)	40m (131.23 ft)	40m (131.23 ft)	40m (131.2 ft)
Video Compression	H.265/H.264/H.264H/H.264B/MJPEG	H.265/H.264/H.264H/H.264B/MJPEG	H.265/H.264/H.264H/H.264B/MJPEG	H.265/H.264/H.264H/H.264B/MJPEG	H.265/H.264/H.264H/H.264B/MJPEG
Smart Codec	Supported	Supported	Supported	Supported	Supported
Max. Resolution	5M (2592 x 1944)	1080p (1920 x 1080)	5M (2592 x 1944)	1080p (1920 x 1080)	5Mp (2592 x 1944)
Frame Rate	2592 x 1944@1~20 fps	1920 x 1080@1~25/30 fps	2592 x 1944@1~20 fps	1920 x 1080@1~25/30 fps	2592 x 1944@1~20 fps
Multi-streaming	3 streams				
Pan/Tilt/Rotation	Horizontal: 0°~360°, Vertical: 0°~90° Rotation: 0°~360°	Horizontal: 0°~360°, Vertical: 0°~90° Rotation: 0°~360°	Pan: 0°~355°, Vertical: 0°~75°, Rotation: 0°~355°	Pan: 0°~355°, Vertical: 0°~75°, Rotation: 0°~355°	Pan: 0°~360°, Tilt: 0°~78°, Rotation: 0°~360°
Compatibility	ONVIF (profile S&G), CGI, P2P, Milestone, Genetec				
Audio In/Out	1/1	1/1	1/1	1/1	Built-in MIC
Memory Slot	Micro SD, Max. 256GB				
Alarm In/Out	1 channel In: 5mA 3V-5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 3V-5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 3V-5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 3V-5VDC 1 channel Out: 300mA 12VDC	--
Ingress Protection	IP67	IP67, IK10(optional)	IP67; IK10	IP67; IK10	IP67
Working Temperature	-30°C~+60°C (-22°F~+140°F)				
Power	12V DC/POE (802.3af), Max. 9.8W	12V DC/POE (802.3af), Max. 9.4W	12V DC/POE (802.3af), Max. 8.5W	12V DC/POE (802.3af), Max. 8W	12V DC/POE (802.3af), Max. 8.0W
Artificial Intelligence					
Perimeter Protection	Tripwire; intrusion (Recognition of human and vehicle)				
Intelligent Search	Works together with Smart NVR in refining intelligent search, event extraction and merging of event videos.	Works together with Smart NVR in refining intelligent search, event extraction and merging of event videos.	Works together with Smart NVR in refining intelligent search, event extraction and merging of event videos.	Works together with Smart NVR in refining intelligent search, event extraction and merging of event videos.	Works together with Smart NVR in refining intelligent search, event extraction and merging of event videos.
SMD Plus	Supported	Supported	Supported	Supported	Supported

NETWORK CAMERAS

Lite AI 3 Series

	Vari-focal Eyeball	Fixed-focal Bullet		Fixed-focal Dome	
Model	IPC-HDW3241T-ZAS	IPC-HFW3549E-AS-LED	IPC-HFW3249E-AS-LED	IPC-HDBW3541E-AS	IPC-HDBW3241E-AS
Appearance	 	 	 	 	 
Image Sensor	1/2.8" 2Mp CMOS	1/2.7" 5Mp CMOS	1/2.8" 2Mp CMOS	1/2.7" 5Mp CMOS	1/2.8" 2Mp CMOS
Focal Length	2.7mm~13.5mm motorized lens	2.8mm/F1.0; 3.6mm/F1.0	2.8mm/F1.0; 3.6mm/F1.0	2.8mm fixed lens (3.6mm/6mm optional)	2.8mm fixed lens (3.6mm/6mm optional)
FOV-H	108°~28°	98°/77°	107°/84°	98°/80°/50°	106°/87°/54°
Min. Illumination	0.002 Lux@F1.5	0.003 Lux @F1.0	0.0015 Lux @ F1.0	0.005 Lux@F1.6	0.002 Lux@F1.6
Day/Night	ICR	ICR	ICR	ICR	ICR
WDR	120dB	120dB	120dB	120dB	120dB
Max. IR Distance	40m (131.2 ft)	30m (98.4 ft)	30m (98.4 ft)	50m (164.0 ft)	50m (164.0 ft)
Video Compression	H.265/H.264/H.264H/H.264B/MJPEG	H.265/H.264/H.264H/H.264B MJPEG (sub stream)	H.265/H.264/H.264H/H.264B MJPEG (sub stream)	H.265/H.264/H.264H/H.264B/MJPEG	H.265/H.264/H.264H/H.264B/MJPEG
Smart Codec	Supported	Supported	Supported	Supported	Supported
Max. Resolution	1080P (1920 x 1080)	5MP (2592 x 1944)	1080p (1920 x 1080)	5M (2592 x 1944)	1080P (1920 x 1080)
Frame Rate	1920 x 1080@1~25/30 fps	5MP (2592 x 1944) @20 fps	1920 x 1080@1~25/30 fps	2592 x 1944@1~20 fps	1920 x 1080@1~25/30 fps
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams
Pan/Tilt/Rotation	Pan:0°~360°, Tilt:0°~78°, Rotation:0°~360°	Pan: 0°~360°, Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~355°;Tilt: 0°~65° Rotation: 0°~355°	Pan:0°~355°; Verticle:0°~65°; Rotation:0°~355°	Pan:0°~355°; Verticle:0°~65°; Rotation:0°~355°
Compatibility	ONVIF (profile S&G), CGI, P2P, Milestone, Genetec	"ONVIF (Profile S/Profile G/Profile T); CGI; Milestone;Genetec"	ONVIF (Profile S/Profile G); CGI; P2P; Milestone; Genetec	ONVIF (profile S&G),CGI,P2P, Milestone,Genetec	ONVIF (profile S&G),CGI,P2P, Milestone,Genetec
Audio In/Out	Built-in MIC	1/1	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	--	1 channel In: 5mA 3V-5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 3V-5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 3V-5VDC 1 channel Out: 300mA 12VDC	1 channel In: 5mA 3V-5VDC 1 channel Out: 300mA 12VDC
Ingress Protection	IP67	IP67	IP67	IP67; IK10	IP67; IK10
Working Temperature	-30°C~+60°C (-22°F~+140°F)	-40°C~+60°C (-40°F~+142°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)
Power	12V DC/POE (802.3af), Max. 7.8W	12V DC/POE, Max. 8.4W	12V DC/POE, Max. 8.1W	12V DC/POE (802.3af), Max.7.3W	12V DC/POE (802.3af), Max.6.9W
Artificial Intelligence					
Perimeter Protection	Tripwire; intrusion (Recognition of human and vehicle)	Tripwire; intrusion (Recognition of human and vehicle)	Tripwire; intrusion (Recognition of human and vehicle)	Tripwire; intrusion (Recognition of human and vehicle)	Tripwire; intrusion (Recognition of human and vehicle)
Intelligent Search	Works together with Smart NVR in refining intelligent search, event extraction and merging of event videos.	Works together with Smart NVR in refining intelligent search, event extraction and merging of event videos.	Works together with Smart NVR in refining intelligent search, event extraction and merging of event videos.	Works together with Smart NVR in refining intelligent search, event extraction and merging of event videos.	Works together with Smart NVR in refining intelligent search, event extraction and merging of event videos.
SMD Plus	Supported	Supported	Supported	Supported	Supported

Lite AI 3 Series

	Fixed-focal Eyeball		Wedge Dome	
Model	IPC-HDW3549TM-AS-LED	IPC-HDW3249TM-AS-LED	IPC-HDBW3541F-AS-M	IPC-HDBW3241F-AS-M
Appearance	 Full-color	 Full-color	 Starlight	 Starlight+
Image Sensor	1/2.7" 5Mp CMOS	1/2.8" 2Mp CMOS	1/2.7" 5Mp CMOS	1/2.8" 2Mp CMOS
Focal Length	2.8mm/F1.0; 3.6mm/F1.0	2.8mm/F1.0; 3.6mm/F1.0	2.8mm fixed lens (3.6mm/6mm optional)	2.8mm fixed lens (3.6mm/6mm optional)
FOV-H	98°/77°	107°/84°	98°/80°/50°	106°/87°/54°
Min. Illumination	0.003 Lux @F1.0	0.0015 Lux @ F1.0	0.005 Lux@F1.6	0.002 Lux@F1.6
Day/Night	ICR	ICR	ICR	ICR
WDR	120dB	120dB	120dB	120dB
Max. IR Distance	30m (98.4 ft)	20m (65.6 ft)	50m (164.0 ft)	50m (164.0 ft)
Video Compression	H.265; H.264; H.264H; H.264B; MJPEG (sub stream)	H.265; H.264; H.264H; H.264B; MJPEG (sub stream)	H.265/H.264/H.264H/H.264B/MJPEG	H.265/H.264/H.264H/H.264B/MJPEG
Smart Codec	Supported	Supported	Supported	Supported
Max. Resolution	5MP (2592 × 1944)	1080p (1920 × 1080)	5M (2592 × 1944)	1080p (1920 × 1080)
Frame Rate	5MP (2592 × 1944) @20 fps	1920 × 1080@1~25/30 fps	2592 × 1944@1~20 fps	1920 × 1080@1~25/30 fps
Multi-streaming	3 streams	3 streams	3 streams	3 streams
Pan/Tilt/Rotation	Pan: 0°~360°, Tilt: 0°~78°, Rotation: 0°~360°	Pan: 0°~360°, Tilt: 0°~78° Rotation: 0°~360°	Horizontal:-30°~30°; Vertical: 0°~80°;Rtation: 0°~360°	Horizontal:-30°~30°; Vertical: 0°~80°;Rtation: 0°~360°
Compatibility	ONVIF (Profile S/Profile G/Profile T), CGI; Milestone, Genetec	ONVIF(Profile S/Profile G); CGI; P2P; Milestone; Genetec	ONVIF (profile S&G), CGI,P2P,Milestone,Genetec	ONVIF (profile S&G), CGI,P2P,Milestone,Genetec
Audio In/Out	Built-in MIC	Built-in MIC	Built-in MIC	Built-in MIC
Memory Slot	Micro SD, Max. 256GB			
Alarm In/Out	--	--	--	--
Ingress Protection	IP67	IP67	IP67; IK10	IP67; IK10
Working Temperature	-40°C~+60°C (-40°F ~ +141°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)
Power	12V DC/POE, Max. 8.4W	12V DC/POE, Max. 8.1W	12V DC/POE (802.3af), Max. 5.7W	12V DC/POE (802.3af), Max. 5.7W
Artificial Intelligence				
Perimeter Protection	Tripwire; intrusion (Recognition of human and vehicle)			
Intelligent Search	Works together with Smart NVR in refining intelligent search, event extraction and merging of event videos.	Works together with Smart NVR in refining intelligent search, event extraction and merging of event videos.	Works together with Smart NVR in refining intelligent search, event extraction and merging of event videos.	Works together with Smart NVR in refining intelligent search, event extraction and merging of event videos.
SMD Plus	Supported	Supported	Supported	Supported



Lite Series Network Camera

Lite series network camera has efficient video encoding capacity with upgraded H.265 encoding technology, which saves bandwidth and storage space. This camera adopts the starlight technology and displays better color image even under low light condition.



Starlight

The Dahua Starlight technology provides clear and colorful videos of scenes with low illumination. It can guarantee good quality images even under ultra-low light condition.



WDR

With advanced Wide Dynamic Range (WDR) technology, Dahua network camera provides clear details in environments with strong brightness contrast. It can capture clear videos of bright and dark areas of a scene with high brightness or backlight shadow. All products in this series support WDR, except fixed 2230 series.



SD Card

This series offers SD card storage. With 256GB SD card, the Lite Series Network Cameras supports 24/7 continuous motion detection recording and remote DMSS app.



Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, the Dahua Smart Encoding technology realizes higher encoding efficiency compared with H.265 and H.264, providing high-quality videos and reducing storage and transmission costs.

Lite Series

	Vari-focal Bullet			Vari-focal Dome		
Model	IPC-HFW2531T-ZS-S2	IPC-HFW2431T-ZS-S2	IPC-HFW2231T-ZS-S2	IPC-HDBW2531R-ZS-S2	IPC-HDBW2431R-ZS-S2	IPC-HDBW2231R-ZS-S2
Appearance	 Starlight	 Starlight	 Starlight+	 Starlight	 Starlight	 Starlight+
Image Sensor	1/2.7" 5MP CMOS	1/3" 4MP CMOS	1/2.8" 2MP CMOS	1/2.7" 5MP CMOS	1/3" 4MP CMOS	1/2.8" 2MP CMOS
Focal Length	2.7 mm~13.5 mm/F1.5	2.7 mm~13.5 mm/F1.5	2.7 mm~13.5 mm/F1.5	2.7 mm~13.5 mm/F1.5	2.7 mm~13.5 mm/F1.5	2.7 mm~13.5 mm/F1.5
FOV-H	100°~26°	104°~27°	109°~28°	100°~26°	104°~27°	109°~28°
Min. Illumination	0.005 Lux@F1.5	0.01 Lux@F1.5	0.002 Lux@F1.5	0.005 Lux@F1.5	0.01 Lux@F1.5	0.002 Lux@F1.5
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR
WDR	120dB	120dB	120dB	120dB	120dB	120dB
Max. IR Distance	60m (196.85 ft)	60m (196.85 ft)	60m (197ft)	40m (131.2ft)	40m (131.2ft)	40m (131.2ft)
Video Compression	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec
Max. Resolution	5MP (2592x1944)	4MP (2560x1440)	1080P (1920x1080)	5MP (2592x1944)	4MP (2560x1440)	1080P (1920x1080)
Frame Rate	20fps@5MP	25/30fps@4MP	25/30fps@2MP	20fps@5MP	25/30fps@4MP	25/30fps@2MP
Multi-streaming	2 streams	2 streams	2 streams	2 streams	2 streams	2 streams
Pan/Tilt/Rotation	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90° Rotation:0°~360°	Pan:0°~355°; Tilt:0°~67°; Rotation:0°~355°	Pan:0°~355°; Tilt:0°~67°; Rotation:0°~355°	Pan:0°~355°; Tilt:0°~75°; Rotation:0°~355°
Intelligent Video	Tripwire,Intrusion	Tripwire,Intrusion	Tripwire,Intrusion	Tripwire; Intrusion	Tripwire; Intrusion	Tripwire; Intrusion
Compatibility	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec
Audio In/Out	--	--	--	--	--	--
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	--	--	--	--	--	--
Ingress Protection	IP67	IP67;IK10 (optional)	IP67;IK10 (optional)	IP67; IK10	IP67; IK10	IP67; IK10
Working Temperature	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)
Power	DC12V,PoE Max. 10W	DC12V,PoE Max. 9.6W	DC12V,PoE Max. 9.6W	DC12V,PoE Max. 7.9W	DC12V,PoE Max. 6.5W	DC12V,PoE Max. 6.4W

NETWORK CAMERAS

Lite Series

	Vari-focal Eyeball			Fixed-focal Bullet			
Model	IPC-HDW2531T-ZS-S2	IPC-HDW2431T-ZS-S2	IPC-HDW2231T-ZS-S2	IPC-HFW2831S-S-S2	IPC-HFW2531S-S-S2	IPC-HFW2431S-S-S2	IPC-HFW2231S-S-S2
Appearance	 Starlight	 Starlight	 Starlight+	 Starlight	 Starlight	 Starlight	 Starlight+
Image Sensor	1/2.7" 5MP CMOS	1/3" 4MP CMOS	1/2.8" 2MP CMOS	1/2.7" 8MP CMOS	1/2.7" 5MP CMOS	1/3" 4MP CMOS	1/2.8" 2MP CMOS
Focal Length	2.7 mm~13.5 mm/F1.5	2.7 mm~13.5 mm/F1.5	2.7 mm~13.5 mm/F1.5	2.8mm/F2.0 3.6mm/F2.0	2.8mm/F1.6 3.6mm/F1.6	2.8mm/F1.6 3.6mm/F1.6	2.8mm/F1.6 3.6mm/F1.6
FOV-H	100°~26°	104°~27°	109°~28°	105°/ 87°	103°/ 84°	102°/ 84°	106°/ 87°
Min. Illumination	0.005 Lux@F1.5	0.01 Lux@F1.5	0.002 Lux@F1.5	0.009 Lux@F2.0	0.005 Lux@F1.6	0.01 Lux@F1.6	0.002 Lux @F1.6
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR	ICR
WDR	120dB	120dB	120dB	120dB	120dB	120dB	120dB
Max. IR Distance	40m (131.2ft)	40m (131.2ft)	40m (131.2ft)	30m (98ft)	30m (98ft)	30m(98ft)	30m (98ft)
Video Compression	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec
Max. Resolution	5MP (2592x1944)	4MP (2560x1440)	1080P (1920x1080)	8MP (3840x2160)	5MP (2592x1944)	4MP (2560x1440)	1080P (1920x1080)
Frame Rate	20fps@5MP	25/30fps@4MP	25/30fps@2MP	15fps@8MP	20fps@5MP	25/30fps@4MP	25/30fps@2MP
Multi-streaming	2 streams	2 streams	2 streams	2 streams	2 streams	2 streams	2 streams
Pan/Tilt/Rotation	Pan:0°~355°; Tilt:0°~78°; Rotation:0°~360°	Pan:0°~355°; Tilt:0°~78°; Rotation:0°~360°	Pan:0°~355°; Tilt:0°~78°; Rotation:0°~360°	Pan: 0°~360°;Tilt: 0°~90° Rotation: 0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°
Intelligent Video	Tripwire; Intrusion	Tripwire; Intrusion	Tripwire; Intrusion	Tripwire; Intrusion	Tripwire; Intrusion	Tripwire; Intrusion	Tripwire; Intrusion
Compatibility	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec
Audio In/Out	--	--	--	--	--	--	--
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	--	--	--	--	--	--	--
Ingress Protection	IP67	IP67	IP67	IP67	IP67	IP67	IP67
Working Temperature	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C ~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F ~+140°F)
Power	DC12V,PoE Max. 7.3W	DC12V,PoE Max. 6.4W	DC12V,PoE Max. 6.4W	DC12V,PoE Max. 5.5W	DC12V,PoE Max. 5.6W	DC12V,PoE Max. 5W	DC12V,PoE Max. 4.9W

Lite Series

	Fixed-focal Bullet		Fixed-focal Dome		
Model	IPC-HFW2239S-SA-LED-S2	IPC-HFW2439S-SA-LED-S2	IPC-HDBW2531E-S-S2	IPC-HDBW2431E-S-S2	IPC-HDBW2231E-S-S2
Appearance	 Full-Color	 Full-Color	 Starlight	 Starlight	 Starlight+
Image Sensor	1/2.8" 2MP CMOS	1/3" 4MP CMOS	1/2.7" 5MP CMOS	1/3" 4MP CMOS	1/2.8" 2MP CMOS
Focal Length	2.8 mm/F1.0 3.6 mm/F1.0	2.8 mm/F1.0 3.6 mm/F1.0	2.8mm/F1.6 3.6mm/F1.6	2.8mm/F1.6 3.6mm/F1.6	2.8mm/F1.6 3.6mm/F1.6
FOV-H	107°/91°	96°/81°	103°/ 84°	102°/ 84°	106°/ 87°
Min. Illumination	0.0017 Lux@F1.0	0.004 Lux@F1.0	0.005 Lux@F1.6	0.01 Lux@F1.6	0.002 Lux @F1.6
Day/Night	ICR	ICR	ICR	ICR	ICR
WDR	120dB	120dB	120dB	120dB	120dB
Max. IR Distance	30m (98.4 ft)	30m (98.4 ft)	30m (98ft)	30m (98ft)	30m (98ft)
Video Compression	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec
Max. Resolution	1080P(1920x1080)	4MP(2560x1440)	5MP(2592x1944)	4MP(2560x1440)	1080P(1920x1080)
Frame Rate	25/30fps@2MP	25/30fps@4MP	20fps@5MP	25/30fps@4MP	25/30fps@2MP
Multi-streaming	2 streams	2 streams	2 streams	2 streams	2 streams
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan:0°~355°; Tilt:0°~65°; Rotation:0°~355°	Pan:0°~355°; Tilt:0°~65°; Rotation:0°~355°	Pan:0°~355°; Tilt:0°~65°; Rotation:0°~355°
Intelligent Video	Tripwire; Intrusion	Tripwire; Intrusion	Tripwire; Intrusion	Tripwire; Intrusion	Tripwire; Intrusion
Compatibility	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec
Audio In/Out	Built-in MIC	Built-in MIC	--	--	--
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	--	--	--	--	--
Ingress Protection	IP67	IP67	IP67; IK10	IP67; IK10	IP67; IK10
Working Temperature	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C to +60°C (-40°F to +140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)
Power	DC12V,PoE Max. 6W	DC12V,PoE Max. 6.2W	DC12V,PoE Max. 6.1W	DC12V,PoE Max. 5.2W	DC12V,PoE Max. 5.4W

NETWORK CAMERAS


Lite Series

Fixed-focal Eyeball

Model	IPC-HDW2531T-AS-S2	IPC-HDW2431T-AS-S2	IPC-HDW2231T-AS-S2	IPC-HDW2239T-AS-LED-S2	IPC-HDW2439T-AS-LED-S2
Appearance	 	 	 	 	 
Image Sensor	1/2.7" 5MP CMOS	1/3" 4MP CMOS	1/2.8" 2MP CMOS	1/2.8" 2MP CMOS	1/3" 4MP CMOS
Focal Length	2.8mm/F1.6 3.6mm/F1.6	2.8mm/F1.6 3.6mm/F1.6	2.8mm/F1.6 3.6mm/F1.6	2.8 mm/F1.0 3.6 mm/F1.0	2.8 mm/F1.0 3.6 mm/F1.0
FOV-H	103°/ 84°	102°/ 84°	106°/ 87°	107°/91°	96°/81°
Min. Illumination	0.005 Lux@F1.6	0.01 Lux@F1.6	0.002 Lux @F1.6	0.0017 Lux@F1.0	0.004 Lux@F1.0
Day/Night	ICR	ICR	ICR	ICR	ICR
WDR	120dB	120dB	120dB	120dB	120dB
Max. IR Distance	30m (98ft)	30m (98ft)	30m (98ft)	30m (98.4 ft)	30m (98.4 ft)
Video Compression	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec	H.265; H.264; H.265B; MJPEG Supported smart codec
Max. Resolution	5MP (2592x1944)	4MP (2560x1440)	1080P (1920x1080)	1080P (1920x1080)	4MP (2560x1440)
Frame Rate	20fps@5MP	25/30fps@4MP	15fps@8MP	25/30fps@2MP	25/30fps@4MP
Multi-streaming	2 streams	2 streams	2 streams	2 streams	2 streams
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~78° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~78° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~78° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~78° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~78° Rotation: 0°~360°
Intelligent Video	Tripwire; Intrusion	Tripwire; Intrusion	Tripwire; Intrusion	Tripwire; intrusion	Tripwire; intrusion
Compatibility	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec	ONVIF (Profile S/Profile G); CGI; Milestone; Genetec	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P
Audio In/Out	Built-in MIC	Built-in MIC	Built-in MIC	Built-in MIC	Built-in MIC
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	--	--	--	--	--
Ingress Protection	IP67	IP67	IP67	IP67	IP67
Working Temperature	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C to +60°C (-40°F to +140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)
Power	DC12V,PoE Max. 7.2W	DC12V,PoE Max. 6.6W	DC12V,PoE Max. 6.5W	DC12V,PoE Max. 7.1W	DC12V,PoE Max. 7.4W

NETWORK PTZ CAMERAS



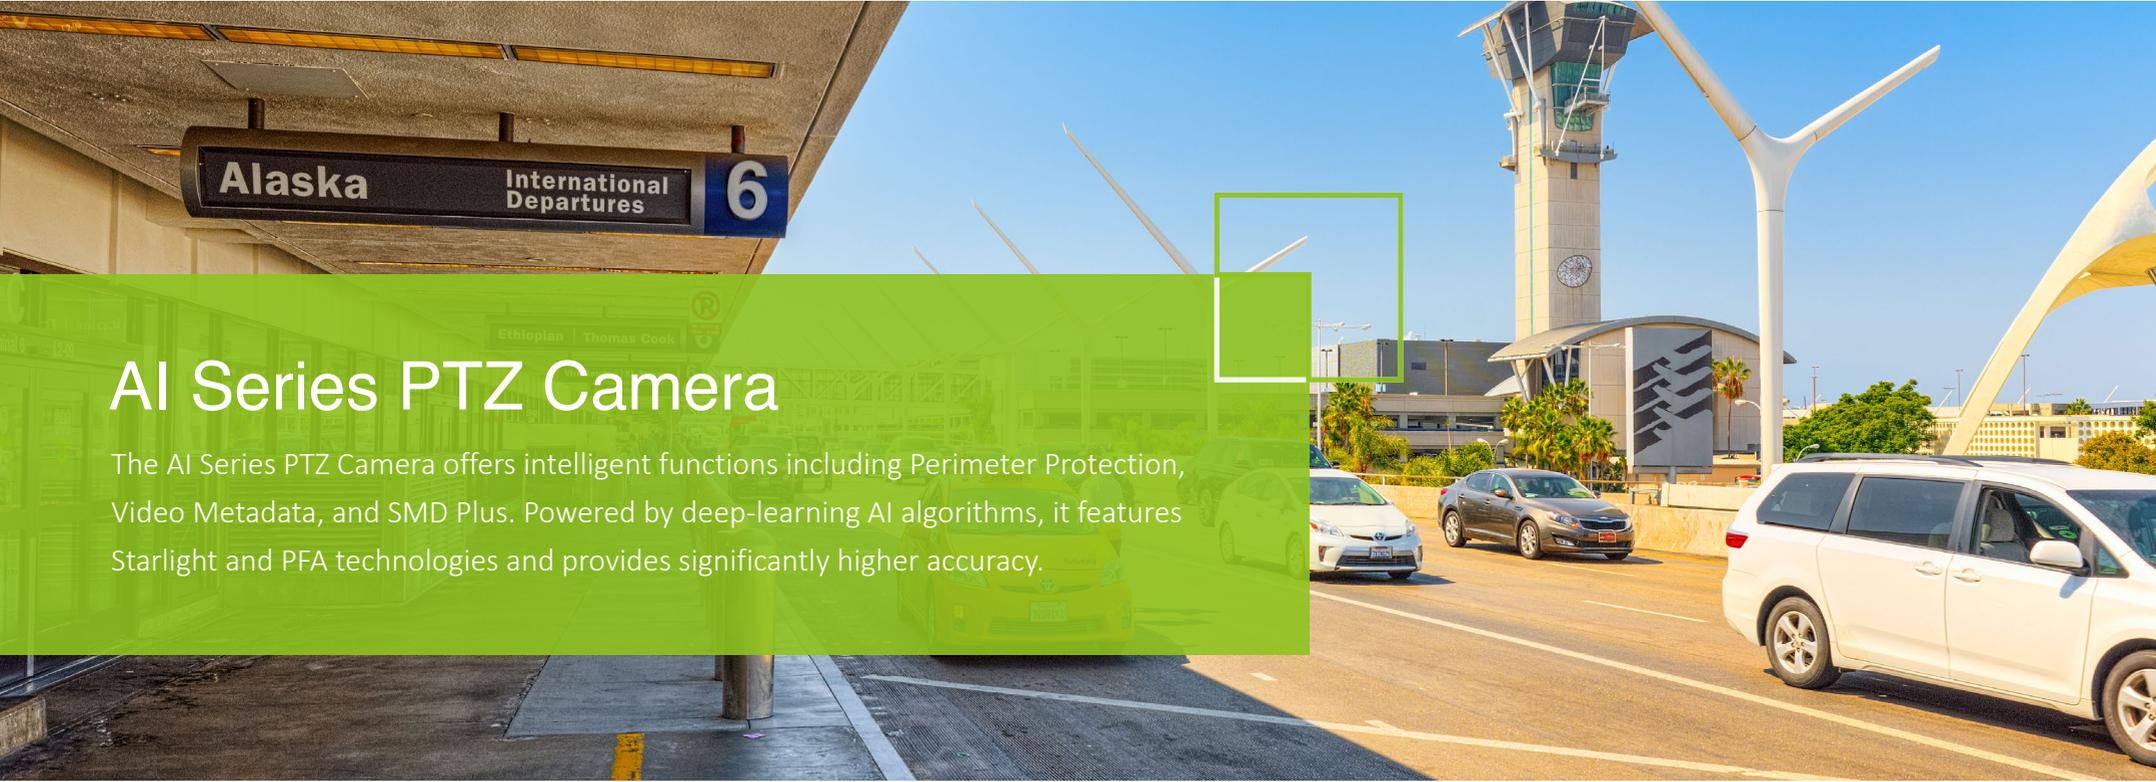

AI Series PTZ Camera

The AI Series PTZ Camera offers intelligent functions including Perimeter Protection, Video Metadata, and SMD Plus. Powered by deep-learning AI algorithms, it features Starlight and PFA technologies and provides significantly higher accuracy.



Face Detection

Supports detection, tracking, optimization and capturing, providing high-quality face images on videos.



SMD PLUS

With intelligent algorithm, the Dahua Smart Motion Detection technology categorizes targets that trigger the detection alarm, and filters alarms caused by non-target objects, realizing an effective and accurate alarm.



Perimeter Protection

Supports people and vehicle classification, which significantly improves accuracy, reduces false alarms and decreases pixel count requirements for object detection.



Smart Capture

Captures high quality human, motor vehicle and non-motor vehicle images from video.

NETWORK PTZ CAMERAS



Ultra AI Series

IR PTZ Camera

Model	SD10A848WA-HNF	SD10A260WA-HNF	SD8A840WA-HNF	SD8A820WA-HNF	SD8A440WA-HNF	SD8A250WA-HNF	SD8A240WA-HNF
Appearance	 4K H.265+ Starlight+	 H.265+ Starlight+	 4K H.265+ Polarlight	 4K H.265+ Polarlight	 H.265+ Starlight+	 H.265+ OIS	 H.265+ Starlight+
Image Sensor	1/1.8" 8MP STARVIS™ CMOS	1/1.8" 2MP STARVIS™ CMOS	1/1.8" 8MP STARVIS™ CMOS	4/3" 8MP STARVIS™ CMOS	1/1.8" 4MP CMOS	1/2.8" 2MP CMOS	1/1.8" 2MP CMOS
Lens	5.7mm~275mm (48x Optical zoom)	5.6mm~336mm (60x Optical zoom)	5.6mm~223mm (40x Optical zoom)	16mm~320 mm (20x Optical zoom)	5.6mm~223mm (40x Optical zoom)	6.6mm~330mm (50x Optical zoom)	5.6mm~223mm (40x Optical zoom)
FOV-H	64.9°~1.8°	64.9°~1.4°	63.9°~2.0°	58.1°~3.2°	63.9°~2.0°	41.3°~1.1°	70.3°~1.8°
Min. Illumination	0.001Lux/F1.4 (Color) 0Lux/F1.4 (IR on)	0.001Lux/F1.4 (Color) 0Lux/F1.4 (IR on)	0.002Lux/F1.4 (Color) 0Lux/F1.4 (IR on)	0.0005Lux/F1.6 (Color) 0Lux/F1.6 (IR on)	0.001Lux/F1.4 (Color) 0Lux/F1.4 (IR on)	0.05Lux@F1.8 (Color) 0Lux@F1.8 (IR on)	0.001Lux/F1.4 (Color) 0Lux/F1.4 (IR on)
WDR	120dB	120dB	120dB	120dB	120dB	120dB	120dB
Max. IR Distance	450m (1476ft)	450m (1476ft)	500m (1640ft)	500 m (1640ft)	500m (1640ft)	500m (1640ft)	500m (1640ft)
Video Compression	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
Max. Resolution	4K (3840x2160)	1080P (1920x1080)	4K (3840x2160)	4K (3840x2160)	4MP (2560x1440)	1080P (2560x1440)	1080P (1920x1080)
Frame Rate	30fps@4K	30fps@1080P	30fps@4K	30fps@4K	30fps@4MP	60fps@1080P	60fps@1080P
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams	3 streams	3 streams
Pan/Tilt	Pan: 0°~360° endless Tilt: -30°~90°	Pan: 0°~360° endless Tilt: -30°~90°	Pan: 0° ~ 360° endless Tilt: -30° ~ 90°	Pan: 0°~360° endless Tilt: -30°~90°	Pan: 0° ~ 360° endless Tilt: -30° ~ 90°	Pan: 0° ~ 360° endless Tilt: -30° ~ 90°	Pan: 0° ~ 360° endless Tilt: -30° ~ 90°
Preset Speed	Pan: 240°/s; Tilt: 200°/s	Pan: 240°/s; Tilt: 200°/s	Pan: 240°/s; Tilt: 120°/s	Pan: 240°/s; Tilt: 200°/s	Pan: 240°/s; Tilt: 120°/s	Pan: 240°/s; Tilt: 120°/s	Pan: 240°/s; Tilt: 120°/s
Compatibility	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API
Audio In/Out	1/1	1/1	1/1	1/1	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	7/2	7/2	7/2	7/2	7/2	7/2	7/2
Ingress Protection	IP67	IP67	IP67	IP67	IP67	IP67	IP67
Working Temperature	-40°C~-70°C (-40°F~+158°F)	-40°C~-70°C (-40°F~+158°F)	-40°C~-70°C (-40°F~+158°F)	-40°C~-70°C (-40°F~+158°F)	-40°C~-70°C (-40°F~+158°F)	-40°C~-70°C (-40°F~+158°F)	-40°C~-70°C (-40°F~+158°F)
Power	DC36V, Hi-POE, Max. 42W	DC36V, Hi-POE, Max. 42W	AC24V, Hi-PoE, Max. 42W	AC24V, Hi-POE, Max. 42W	AC24V, Hi-PoE, Max. 42W	AC24V, Hi-PoE, Max. 38W	AC24V, Hi-PoE, Max. 38W
Artificial Intelligence							
Perimeter Protection	Tripwire, Intrusion(Human & Vehicle classification) , Object Abandoned, Object Missing	Tripwire, Intrusion(Human & Vehicle classification) , Object Abandoned, Object Missing	Tripwire, Intrusion(Human & Vehicle classification) , Object Abandoned, Object Missing	Tripwire, Intrusion(Human & Vehicle classification) , Object Abandoned, Object Missing	Tripwire, Intrusion(Human & Vehicle classification) , Object Abandoned, Object Missing	Tripwire, Intrusion(Human & Vehicle classification) , Object Abandoned, Object Missing	Tripwire, Intrusion(Human & Vehicle classification) , Object Abandoned, Object Missing
Auto Tracking	Supported	Supported	Supported	Supported	Supported	Supported	Supported
Video Metadata	Supported	Supported	Supported	Supported	Supported	Supported	Supported
Face Recognition	--	--	Supported	Supported	Supported	Supported	Supported
Face Detection	--	--	Supported	Supported	Supported	Supported	Supported

NETWORK PTZ CAMERAS


Ultra AI Series

	Laser PTZ Camera		IR PTZ Camera			Vandal-proof PTZ Camera
Model	SD6AL445XA-HNR	SD6AL233XA-HNR	SD6AL445XA-HNR-IR	SD6AL233XA-HNR-IR	SD6AE233XA-HNR	SD65F233XA-HNR
Appearance	 	 	 	 	 	 
Image Sensor	1/2.8" 4MP CMOS	1/1.8" 2M CMOS	1/2.8" 4MP CMOS	1/1.8" 2MP CMOS	1/1.8" 2MP CMOS	1/1.8" 2MP CMOS
Lens	3.9~177.7 mm (45x Optical zoom)	5.8mm~191.4mm (33x Optical zoom)	3.9~177.7 mm (45x Optical zoom)	5.8mm~191.4mm (33x Optical zoom)	5.8~191.4mm (33x Optical zoom)	5.8mm~191.4mm (33x Optical zoom)
FOV-H	70.3~1.8°	60.1~3.2°	70.3~1.8°	60.1~3.2°	60.1~3.2°	60.1~3.2°
Min. Illumination	0.005Lux/F1.6 (Color) 0Lux/F1.6 (IR on)	0.001Lux/F1.5 (Color) 0Lux/F1.5 (IR on)	0.005Lux/F1.6 (Color) 0Lux/F1.6 (IR on)	0.001Lux/F1.5 (Color) 0Lux/F1.5 (IR on)	0.001Lux/F1.5 (Color) 0Lux/F1.5 (IR on)	0.001Lux/F1.5 (Color) 0.0001Lux/F1.5 (B/W)
WDR	120dB	120dB	120dB	120dB	120dB	120dB
Max. IR Distance	550m (1804ft)	550m (1804ft)	300m (984ft)	300m (984ft)	200m (656ft)	--
Video Compression	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
Max. Resolution	4MP (2560x1440)	1080P (1920x1080)	4MP (2560x1440)	1080P (1920x1080)	1080P (1920x1080)	1080P (1920x1080)
Frame Rate	30fps@4MP	60fps@1080P	30fps@4MP	60fps@1080P	60fps@1080P	60fps@1080P
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams	3 streams
Pan/Tilt	Pan: 0°~360° endless Tilt: -20°~90°	Pan: 0°~360° endless Tilt: -20°~90°	Pan: 0°~360° endless Tilt: -20°~90°	Pan: 0°~360° endless Tilt: -20°~90°	Pan: 0°~360° endless Tilt: -20°~90°	Pan: 0°~360° endless Tilt: -20°~90°
Preset Speed	Pan: 240°/s; Tilt: 200°/s	Pan: 240°/s; Tilt: 200°/s	Pan: 240°/s; Tilt: 200°/s	Pan: 240°/s; Tilt: 200°/s	Pan: 240°/s; Tilt: 200°/s	Pan: 600°/s; Tilt: 500°/s
Compatibility	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API
Audio In/Out	1/1	1/1	1/1	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	7/2	7/2	7/2	7/2	7/2	7/2
Ingress Protection	IP67	IP67	IP67	IP67	IP67, IK10	IP67, IK10
Working Temperature	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)
Power	DC36V, Hi-PoE, Max. 36W	AC24V, Hi-PoE, Max. 33W	DC36V, Hi-PoE, Max. 36W	AC24V, Hi-PoE, Max. 32W	AC24V, Hi-PoE, Max. 32W	AC24V, PoE+ (802.3at), Max. 34W
Artificial Intelligence						
Perimeter Protection	Tripwire, Intrusion(Human & Vehicle classification) , Object Abandoned, Object Missing	Tripwire, Intrusion(Human & Vehicle classification) , Object Abandoned, Object Missing	Tripwire, Intrusion(Human & Vehicle classification) , Object Abandoned, Object Missing	Tripwire, Intrusion(Human & Vehicle classification) , Object Abandoned, Object Missing	Tripwire, Intrusion(Human & Vehicle classification) , Object Abandoned, Object Missing	Tripwire, Intrusion(Human & Vehicle classification) , Object Abandoned, Object Missing
Auto Tracking	Supported	Supported	Supported	Supported	Supported	Supported
Smart Capture	Supported	Supported	Supported	Supported	Supported	Supported
Face Recognition	--	--	--	--	--	--
Face Detection	Supported	Supported	Supported	Supported	Supported	Supported

NETWORK PTZ CAMERAS

AI Series

IR PTZ Camera

Model	SD6CE445XA-HNR	SD5A825-HNR-YA	SD5A445XA-HNR	SD5A425XA-HNR	SD5A432XA-HNR	SD5A232XA-HNR
Appearance	 	 	 	 	 	 
Image Sensor	1/2.8" 4MP STARVIS™ CMOS	1/1.8" STARVIS™ CMOS	1/2.8" 4MP STARVIS™ CMOS	1/1.8" 4MP CMOS	1/2.8" STARVIS™ CMOS	1/2.8" STARVIS™ CMOS
Lens	3.9 mm~177.7 mm (45x Optical zoom)	5.4 mm~135 mm (25x Optical zoom)	3.9 mm~177.7mm (45x Optical zoom)	5.4 mm~135mm (25x Optical zoom)	4.9 mm~156 mm (32x Optical zoom)	4.9 mm~156 mm (32x Optical zoom)
FOV-H	70.3°~1.8°	61.6°~3.6°	70.3°~1.8°	61.6°~3.6°	61.6°~2.1°	62.8°~2.2°
Min. Illumination	0.005Lux/F1.6 (Color) 0Lux/F1.6 (IR on)	0.005Lux@F1.6 (Color) 0Lux@F1.6 (IR on)	0.005Lux/F1.6 (Color) 0Lux/F1.6 (IR on)	0.001Lux/F1.6 (Color) 0Lux/F1.6 (IR on)	0.005Lux@F1.35 (Color) 0Lux@F1.35 (IR on)	0.005Lux@F1.35 (Color) 0Lux@F1.35 (IR on)
WDR	120dB	120dB	120dB	120dB	120dB	120dB
Max. IR Distance	250m (820 ft)	150m (492 ft)	150m (492 ft)	150m (492.13 ft)	150m (492 ft)	150m (492 ft)
Video Compression	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
Max. Resolution	4MP (2560x1440)	8MP (3840x2160)	4MP (2560x1440)	4MP (2560x1440)	4MP (2560x1440)	1080P (1920x1080)
Frame Rate	30fps@4MP	30fps@8M	30fps@4MP	30fps@4MP	30fps@4M	60fps@1080P
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams	3 streams
Pan/Tilt	Pan: 0°~360° endless Tilt: -20°~90°	Pan: 0°~360° endless Tilt: -15°~90°	Pan: 0°~360° endless Tilt: -15°~90°	Pan: 0°~360° endless Tilt: -15°~90°	Pan: 0°~360° endless Tilt: -15°~90°	Pan: 0°~360° endless Tilt: -15°~90°
Preset Speed	Pan: 300°/s; Tilt: 200°/s	Pan: 400°/s; Tilt: 300°/s	Pan: 400°/s; Tilt: 300°/s	Pan: 400°/s; Tilt: 300°/s	Pan: 400°/s; Tilt: 300°/s	Pan: 400°/s; Tilt: 300°/s
Compatibility	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API
Audio In/Out	1/1	1/1	1/1	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	7/2	2/1	2/1	2/1	2/1	2/1
Ingress Protection	IP67; IK10	IP67; IK10	IP67; IK10	IP67; IK10	IP67; IK10	IP67; IK10
Working Temperature	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)
Power	AC24V, PoE+(802.3at) Max. 26W	AC24V, PoE+ (802.3at) Max. 20W	AC24V, PoE+(802.3at) Max. 20W	AC24V,POE+(802.3at) Max.20W	AC24V, PoE+ (802.3at) Max. 20W	AC24V, PoE+ (802.3at) Max. 20W
Artificial Intelligence						
Perimeter Protection	Tripwire, Intrusion (Human & Vehicle Classification), Object Abandoned, Object Missing	Tripwire, Intrusion (Human & Vehicle Classification), Object Abandoned, Object Missing	Tripwire, Intrusion (Human & Vehicle Classification), Object Abandoned, Object Missing	Tripwire, Intrusion (Human & Vehicle Classification), Object Abandoned, Object Missing	Tripwire, Intrusion (Human & Vehicle Classification), Object Abandoned, Object Missing	Tripwire, Intrusion (Human & Vehicle Classification), Object Abandoned, Object Missing
SMD	Supported	NA	Supported	Supported	Supported	Supported
Auto Tracking	Supported	Supported	Supported	Supported	Supported	Supported
Smart Capture	Supported	NA	Supported	Supported	Supported	Supported
Face Detection	Supported	NA	Supported	Supported	Supported	Supported

NETWORK PTZ CAMERAS

AI Series

	IR PTZ Camera	Vandal-proof PTZ Camera		In-ceiling PTZ Camera	
Model	SD5A225XA-HNR	SD50432XA-HNR	SD50232XA-HNR	SD52C432XA-HNR	SD52C232XA-HNR
Appearance	 	 	 	 	 
Image Sensor	1/2.8" STARVIS™ CMOS	1/2.8" STARVIS™ CMOS	1/2.8" STARVIS™ CMOS	1/2.8" STARVIS™ CMOS	1/2.8" STARVIS™ CMOS
Lens	5.4 mm~135 mm (25x Optical zoom)	4.9 mm~ 156 mm (32x Optical zoom)	4.9 mm~156 mm (32x Optical zoom)	4.9 mm~156 mm (32x Optical zoom)	4.9 mm ~ 156 mm (32x Optical zoom)
FOV-H	58.7°~3.1°	61.6°~2.1°	62.8°~2.2°	61.6°~2.1°	62.8°~2.2°
Min. Illumination	0.005Lux@F1.6 (Color) 0Lux@F1.6 (IR on)	0.005Lux@F1.35 (Color) 0.0005Lux@F1.35 (B/W)	0.005Lux@F1.35 (Color) 0.0005Lux@F1.35 (B/W)	0.005Lux@F1.35 (Color) 0.0005Lux@F1.35 (B/W)	0.005Lux@F1.35 (Color) 0.0005Lux@F1.35 (B/W)
WDR	120dB	120dB	120dB	120dB	120dB
Max. IR Distance	150m (492 ft)	--	--	--	--
Video Compression	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
Max. Resolution	1080P (1920x1080)	4MP (2560x1440)	1080P (1920x1080)	4MP (2560x1440)	1080P (1920x1080)
Frame Rate	60fps@1080P	30fps@4M	60fps@1080P	30fps@4M	60fps@1080P
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams
Pan/Tilt	Pan: 0°~360° endless Tilt: -15°~90°	Pan: 0°~360° endless Tilt: 0°~90°	Pan: 0°~360° endless Tilt: 0°~90°	Pan: 0°~360° endless Tilt: 0°~90°	Pan: 0°~360° endless Tilt: 0°~90°
Preset Speed	Pan: 400°/s; Tilt: 300°/s	Pan: 500°/s; Tilt: 500°/s	Pan: 500°/s; Tilt: 500°/s	Pan: 500°/s; Tilt: 500°/s	Pan: 500°/s; Tilt: 500°/s
Compatibility	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API
Audio In/Out	1/1	1/1	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	2/1	2/1	2/1	2/1	2/1
Ingress Protection	IP67; IK10	IP67; IK10	IP67; IK10	IK10	IK10
Working Temperature	-40°C~-70°C (-40°F~+158°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)
Power	AC24V, PoE+ (802.3at) Max. 20W	AC24V, PoE+ (802.3at) Max. 16W	AC24V, PoE+ (802.3at) Max. 16W	AC24V, PoE+ (802.3at) Max. 16W	AC24V, PoE+ (802.3at) Max. 16W
Artificial Intelligence					
Perimeter Protection	Tripwire, Intrusion (Human & Vehicle Classification), Object Abandoned, Object Missing	Tripwire, Intrusion (Human & Vehicle Classification), Object Abandoned, Object Missing	Tripwire, Intrusion (Human & Vehicle Classification), Object Abandoned, Object Missing	Tripwire, Intrusion (Human & Vehicle Classification), Object Abandoned, Object Missing	Tripwire, Intrusion (Human & Vehicle Classification), Object Abandoned, Object Missing
SMD	Supported	Supported	Supported	Supported	Supported
Auto Tracking	Supported	Supported	Supported	Supported	Supported
Smart Capture	Supported	Supported	Supported	Supported	Supported
Face Detection	Supported	Supported	Supported	Supported	Supported

NETWORK PTZ CAMERAS

AI Series

NETWORK PTZ CAMERAS

	IR PTZ Camera		4G PTZ Came	Mini IR PTZ Camera	IR Positioning System
Model	SD49425XB-HNR	SD49225XA-HNR	SD49425XB-HNR-G	SD1A404XB-GNR	PTZ1A225XA-HNR
Appearance	 	 	 	 	 
Image Sensor	1/2.8" STARVIS™ CMOS	1/2.8" STARVIS™ CMOS	1/2.8" STARVIS™ CMOS	1/2.8" STARVIS™ CMOS	1/2.8" STARVIS™ CMOS
Lens	4.8 mm~120 mm (25x Optical zoom)	4.8 mm~120 mm (25x Optical zoom)	4.8 mm~120 mm (25x Optical zoom)	2.8 mm~12 mm (4x Optical zoom)	4.8 mm~120 mm (25x Optical zoom)
FOV-H	60.0°~2.5°	62.8°~2.6°	60.0°~2.5°	31.6°~96.9°	62.8°~2.6°
Min. Illumination	0.005Lux/F1.6 (Color) 0Lux/F1.6 (IR on)	0.005Lux/F1.6 (Color) 0Lux/F1.6 (IR on)	0.005Lux/F1.6 (Color) 0Lux/F1.6 (IR on)	0.005Lux/F1.8 (Color) 0Lux/F1.8 (IR on)	0.005Lux/F1.6 (Color) 0Lux/F1.6 (IR on) 120dB
WDR	120dB	120dB	120dB	120dB	120dB
Max. IR Distance	100m (328.08 ft)	100m (328.08 ft)	100m (328.08 ft)	15m (49.21 ft)	150m (492.13ft)
Video Compression	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
Max. Resolution	4MP (2560x1440)	1080P (1920x1080)	4MP (2560x1440)	4MP (2560x1440)	1080P (1920x1080)
Frame Rate	30fps@4MP	30fps@1080P	30fps@4MP	30fps@4MP	30fps@1080P
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams
Pan/Tilt	Pan: 0°~360° endless Tilt: -15°~90°	Pan: 0°~360° endless Tilt: -15°~90°	Pan: 0°~360° endless Tilt: -15°~90°	Pan: 0°~355° Tilt: 5°~90°	Pan: 0°~360° endless Tilt: -90°~90° (Effective angle: -51°~+90°)
Preset Speed	Pan: 240° /s; Tilt: 200°/s	Pan: 240° /s; Tilt: 200°/s	Pan: 240° /s; Tilt: 200°/s	Pan: 80°/s; Tilt: 40°/s	Pan: 180° /s; Tilt: 120° /s
Compatibility	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF profile S & G & T, API
Audio In/Out	1/1	1/1	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	2/1	2/1	2/1	--	2/1
Ingress Protection	IP66	IP66	IP66	IP66, IK08	IP67
Working Temperature	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)	-30°C~+60°C (-22°F~140°F)	-40°C~+70°C (-40°F~+158°F)
Power	DC12V, POE+ (802.3at) Max. 21W	DC12V, POE+ (802.3at) Max. 22W	DC12V, POE+ (802.3at) Max. 21W	DC12V, POE (802.3af) Max. 8.5W	AC12V, POE+ (802.3at) Max. 23W
Artificial Intelligence					
Perimeter Protection	Tripwire, Intrusion (Human & Vehicle Classification), Object Abandoned, Object Missing	Tripwire, Intrusion (Human & Vehicle Classification), Object Abandoned, Object Missing	Tripwire, Intrusion (Human & Vehicle Classification), Object Abandoned, Object Missing	Tripwire, Intrusion (Human & Vehicle Classification), Object Abandoned, Object Missing	Tripwire, Intrusion (Human & Vehicle Classification), Object Abandoned, Object Missing
SMD	Supported	Supported	Supported	Supported	Supported
Auto Tracking	--	--	--	--	Supported
Smart Capture	Supported	Supported	Supported	Supported	Supported
Face Detection	Supported	Supported	Supported	Supported	Supported

Pro Series PTZ Camera

The Pro Series PTZ is designed to meet high image quality and low-light surveillance requirements with the help of Starlight technology. Rich housing and model selections are available to meet diverse application needs.



Rich Choices

Wide range of housings and models to suit all requirements.



Optimized Image

High quality images using Starlight technology.



PFA

Improves focusing performance to a new level.



Powerful Protection

Protection IP67 / IK10 ratings ensure cameras can withstand tough conditions.

NETWORK PTZ CAMERAS

Pro Series

NETWORK PTZ CAMERAS

	IR PTZ Camera			PTZ Camera			Zoom Camera
Model	SD6CE245U-HNI	SD6CE230U-HNI	SD6CE225U-HNI	SD60430U-HNI	SD60230U-HNI	SD60225U-HNI	SDZ2030S-N
Appearance	 	 	 	 	 	 	 
Image Sensor	1/2.8" 2MP STARVIS™ CMOS	1/2.8" 2MP STARVIS™ CMOS	1/2.8" 2MP STARVIS™ CMOS	1/3" 4MP CMOS	1/2.8" 2MP STARVIS™ CMOS	1/2.8" 2MP STARVIS™ CMOS	1/2.8" 2MP STARVIS™ CMOS
Lens	3.95~177.7mm (45x Optical zoom)	4.5~135mm (30x Optical zoom)	4.8~120mm (25x Optical zoom)	4.5~135mm (30x Optical zoom)	4.5~135mm (30x Optical zoom)	4.8~120mm (25x Optical zoom)	4.5~135mm (30x Optical zoom)
FOV-H	70.3~1.8°	67.8~2.4°	62.8~2.6°	60~2.2°	67.8~2.4°	62.8~2.6°	67.8~2.4°
Min. Illumination	0.005Lux/F1.6 (Color) 0Lux/F1.6 (IR on)	0.005Lux/F1.6 (Color) 0Lux/F1.6 (IR on)	0.005Lux/F1.6 (Color) 0Lux/F1.6 (IR on)	0.05Lux/F1.6 (Color) 0.005Lux/F1.6 (B/W)	0.005Lux/F1.6 (Color) 0.0005Lux/F1.6 (B/W)	0.005Lux/F1.6 (Color) 0.0005Lux/F1.6 (B/W)	0.005Lux/F1.6 (Color) 0.0005Lux/F1.6 (B/W)
WDR	120dB	120dB	120dB	120dB	120dB	120dB	120dB
Max. IR Distance	250m (820 ft)	250m (820 ft)	250m (820 ft)	--	--	--	--
Video Compression	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
Max. Resolution	1080P (1920x1080)	1080P (1920x1080)	1080P (1920x1080)	4MP (2592x1520)	1080P (1920x1080)	1080P (1920x1080)	1080P (1920x1080)
Frame Rate	60fp@1080P	60fp@1080P	60fp@1080P	30fps@4MP/3MP 60fps@1080P	60fps@1080P	60fps@1080P	60fps@1080P
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams	3 streams	3 streams
Pan/Tilt	Pan: 0°~360° endless; Tilt: -20°~90°	Pan: 0°~360° endless; Tilt: -20°~90°	Pan: 0°~360° endless; Tilt: -20°~90°	Pan: 0°~360° endless; Tilt: -20°~90°	Pan: 0°~360° endless; Tilt: -20°~90°	Pan: 0°~360° endless; Tilt: -20°~90°	--
Preset Speed	Pan: 300°/s; Tilt: 200°/s	Pan: 300°/s; Tilt: 200°/s	Pan: 300°/s; Tilt: 200°/s	Pan: 600°/s; Tilt: 500°/s	Pan: 600°/s; Tilt: 500°/s	Pan: 600°/s; Tilt: 500°/s	--
Intelligent Video	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection
Compatibility	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API
Audio In/Out	1/1	1/1	1/1	1/1	1/1	1/1	1/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	7/2	7/2	7/2	7/2	7/2	7/2	2/1
Ingress Protection	IP67; IK10	IP67; IK10	IP67; IK10	IP67; IK10	IP67; IK10	IP67; IK10	--
Working Temperature	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)	-40°C~+70°C (-40°F~+158°F)
Power	AC24V, PoE+ (802.3at) Max. 25W	AC24V, PoE+ (802.3at) Max. 25W	AC24V, PoE+ (802.3at) Max. 25W	AC24V, PoE+ (802.3at) Max. 20W	AC24V, PoE+ (802.3at) Max. 20W	AC24V, PoE+ (802.3at) Max. 20W	DC12V, PoE (802.3af) Max. 10W

Lite Series PTZ Camera

The Lite Series PTZ offers a cost/performance solution suitable for a wide range of applications. Its compact design based on Dahua quality standards and assurance enables the products in the entire series to meet customer's requirements.



Mini IR PTZ

Pan, tilt, zoom and IR functions in compact housing.



Advanced Intelligence

Intelligent IVS and Face Detection ensure efficient surveillance.



Powerful Zoom

It can cover large areas with up to 25x optical zoom capability




Cost-effective

Performance and quality are combined at an affordable price.

NETWORK PTZ CAMERAS

Lite Series

NETWORK PTZ CAMERAS

	Vandal-proof PTZ Camera		In-ceiling PTZ Camera	Mini IR PTZ Camera
Model	SD40212T-HN (-S2)	SD42212T-HN (-S2)	SD42C212T-HN (-S2)	SD29204UE-GN
Appearance	 	 	 	 
Image Sensor	1/2.8" 2MP STARVIS™ CMOS	1/2.8" 2MP STARVIS™ CMOS	1/2.8" 2MP STARVIS™ CMOS	1/2.8" 2MP STARVIS™ CMOS
Lens	5.3~64mm (12x Optical zoom)	5.3~64mm (12x Optical zoom)	5.3~64mm (12x Optical zoom)	2.7~11mm (4x Optical zoom)
FOV-H	58.2°~4.8°	58.2°~4.8°	58.2°~4.8°	112.5°~30°
Min. Illumination	0.005Lux/F1.6 (Color) 0.0005Lux/F1.6 (B/W)	0.005Lux/F1.6 (Color) 0.0005Lux/F1.6 (B/W)	0.005Lux/F1.6 (Color) 0.0005Lux/F1.6 (B/W)	0.005Lux/F1.6 (Color) 0Lux/F1.6 (IR on)
WDR	120dB	120dB	120dB	120dB
Max. IR Distance	--	--	--	30m (98 ft)
Video Compression	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265H.264+/H.264	H.265+/H.265 H.264+/H.264
Max. Resolution	1080P (1920x1080)	1080P (1920x1080)	1080P (1920x1080)	1080P (1920x1080)
Frame Rate	30fp@1080P	30fp@1080P	30fp@1080P	30fps@1080P
Multi-streaming	3 streams	3 streams	3 streams	3 streams
Pan/Tilt	Pan: 0°~360° endless Tilt: -2°~90°	Pan: 0°~360° endless Tilt: -2°~90°	Pan: 0°~360° endless Tilt: -2°~90°	Pan: 0°~360° limited Tilt: 0°~90°
Preset Speed	Pan: 300°/s, Tilt: 200°/s	Pan: 300°/s; Tilt: 200°/s	Pan: 300°/s; Tilt: 200°/s	Pan: 100°/s; Tilt: 60°/s
Intelligent Video	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection
Compatibility	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API
Audio In/Out	1/1	1/1	1/1	Built-in Mic
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 128GB
Alarm In/Out	2/1	2/1	2/1	--
Ingress Protection	IP66; IK10	IP66; IK10	IK10	--
Working Temperature	-40°C~+60°C (-40°F~+140°F)	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)
Power	AC24V, PoE+ (802.3at) Max. 22W	AC24V, PoE+ (802.3at) Max. 12W	AC24V, PoE+ (802.3at) Max. 12W	DC12V, PoE (802.3af) Max. 13W


NETWORK PTZ CAMERAS

Lite Series

	Mini PTZ Camera		Mini IR PTZ Camera			
Model	SD22404T-GN	SD22204UE-GN	SD1A203T-GN	SD1A203T-GN-W	PTZ1C203UE-GN	PTZ1C203UE-GN-W
Appearance	 	  	  	   	  	   
Image Sensor	1/3" 4MP CMOS	1/2.8" 2MP STARVIS™ CMOS	1/2.8" 2MP STARVIS™ CMOS	1/2.8" 2MP STARVIS™ CMOS	1/2.8" 2MP STARVIS™ CMOS	1/2.8" 2MP STARVIS™ CMOS
Lens	2.7~11mm (4x Optical zoom)	2.7~11mm (4x Optical zoom)	2.7~8.1mm (3x optical zoom)	2.7~8.1mm (3x optical zoom)	2.7~8.1mm (3x Optical zoom)	2.7~8.1mm (3x Optical zoom)
FOV-H	112.5°~30°	112.5°~30°	105.6°~35.2°	105.6°~35.2°	105.6°~35.2°	105.6°~35.2°
Min. Illumination	0.05Lux/F1.6(Color) 0.005Lux/F1.6(B/W)	0.005Lux/F1.6(Color) 0.0005Lux/F1.6(B/W)	0.005Lux/F1.8(Color) 0Lux/F1.8 (IR on)	0.005Lux/F1.8(Color) 0Lux/F1.8(IR on)	0.005Lux/F1.6(Color) 0Lux@F1.6(IR on)	0.005Lux/F1.6(Color) 0Lux@F1.6(IR on)
WDR	120dB	120dB	120dB	120dB	120dB	120dB
Max. IR Distance	--	--	15m (49 ft)	15m (49 ft)	20m (65.6 ft)	20m (65.6 ft)
Video Compression	H.265/H.264	H.265+/H.265 H.264+/H.264	H.265+/H.265 H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265 H.264+/H.264	H.265+/H.265/H.264+/H.264
Max. Resolution	4MP (2592x1520)	1080P (1920x1080)	1080P (1920x1080)	1080P (1920x1080)	1080P (1920x1080)	1080P (1920x1080)
Frame Rate	30fps@4MP/3MP	30fps@1080P	30fps@1080P	30fps@1080P	30fps@1080P 60fps@720P	30fps@1080P 60fps@720P
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams	3 streams
Pan/Tilt	Pan: 0°~355° Tilt: 0°~90°	Pan: 0°~355° Tilt: 0°~90°	Pan: 0°~355° Tilt: 5°~90°	Pan: 0°~355° , Tilt: 5°~90°	Pan: 0°~180° Tilt: -5°~55°	Pan: 0°~180° , Tilt: -5°~55°
Preset Speed	Pan: 100°/s; Tilt: 60°/s	Pan: 100°/s; Tilt: 60°/s	Pan: 80° /s; Tilt: 40° /s	Pan: 80° /s, Tilt: 40° /s	--	--
Intelligent Video	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection
Compatibility	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API	ONVIF Profile S & G & T, API
Audio In/Out	--	--	1 (Mic in/Line in)/1	1 (Mic in/Line in)/1	1 (Mic in/Line in)/1	1 (Mic in/Line in)/1
Memory Slot	Micro SD, Max. 256GB	Micro SD, Max. 128GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB	Micro SD, Max. 256GB
Alarm In/Out	--	--	--	--	--	--
Ingress Protection	IP66; IK10	IP66; IK10	IP66; IK10	IP66; IK10	IP66	IP66
Working Temperature	-30°C~-60°C (-22°F~+140°F)	-30°C~-60°C (-22°F~+140°F)	-30°C~-60°C (-22°F~+140°F)	-30°C~-60°C (-22°F~+140°F)	-30°C~-60°C (-22°F~+140°F)	-30°C~-60°C, (-22°F~+140°F)
Power	DC12V, PoE (802.3af) Max. 10W	DC12V, PoE (802.3af) Max. 10W	DC12V, PoE (802.3af) Max. 10.5W	DC12V, Max. 10.5W	DC12V, PoE(802.3af) Max. 11W	DC12V, Max. 11W

NETWORK VIDEO RECORDERS



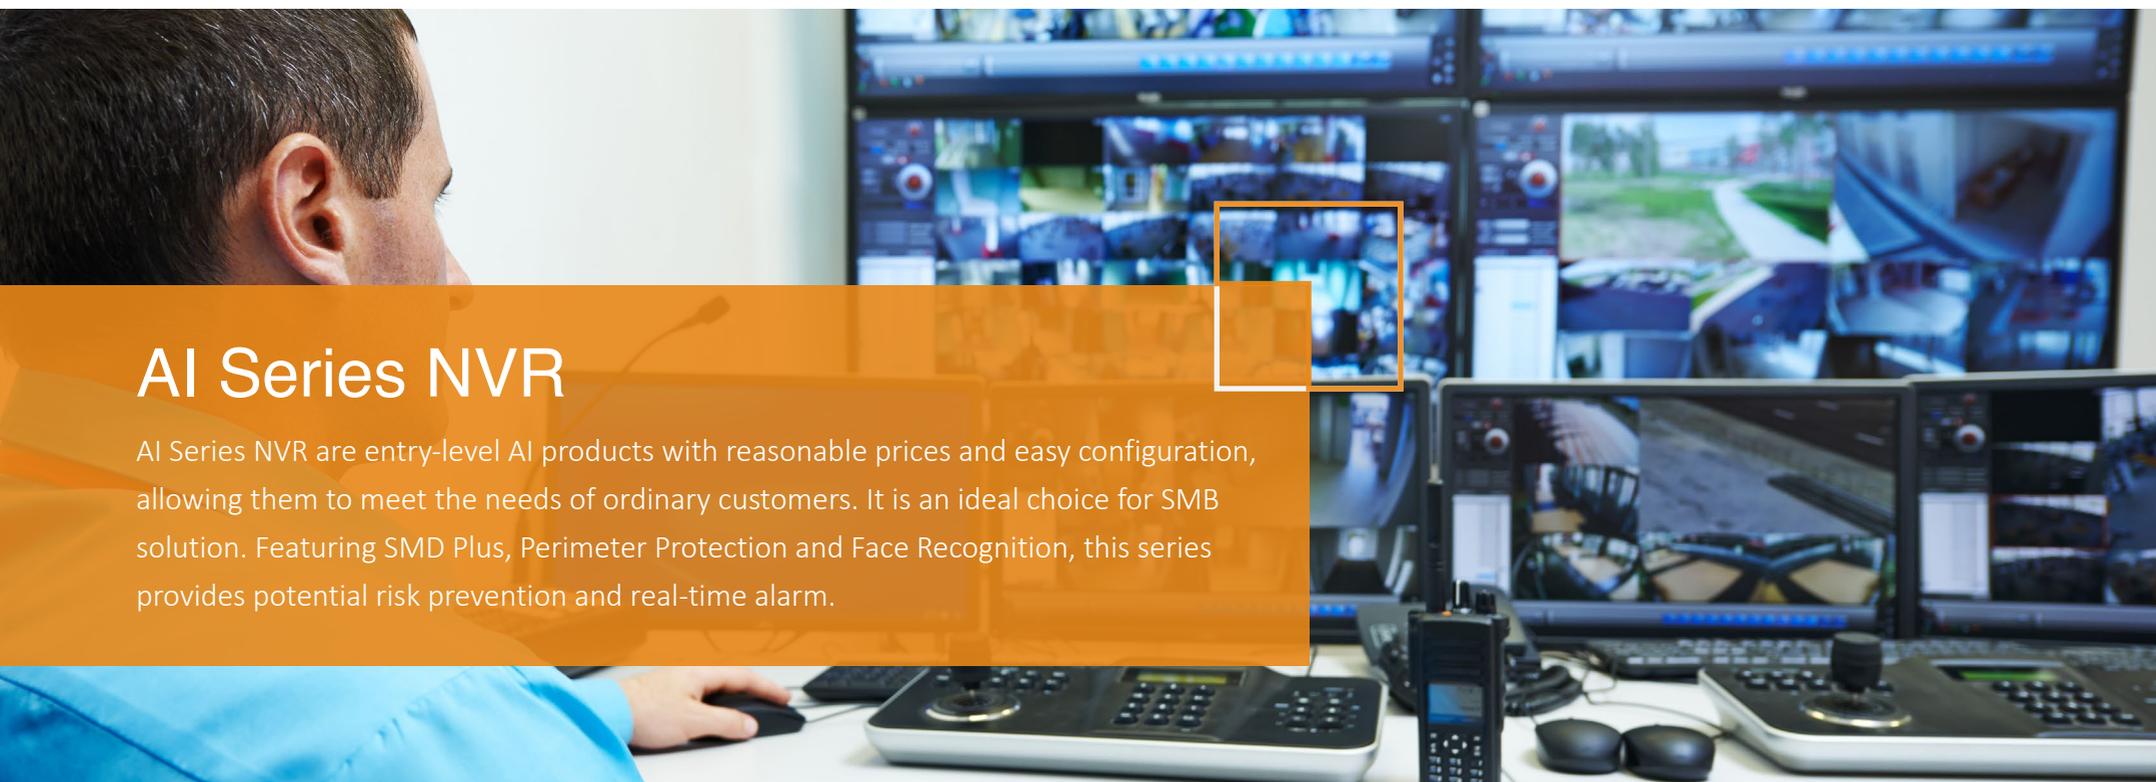

AI Series NVR

AI Series NVR are entry-level AI products with reasonable prices and easy configuration, allowing them to meet the needs of ordinary customers. It is an ideal choice for SMB solution. Featuring SMD Plus, Perimeter Protection and Face Recognition, this series provides potential risk prevention and real-time alarm.



SMD PLUS

With intelligent algorithm, the Dahua Smart Motion Detection technology categorizes targets that trigger the detection alarm, and filters alarms caused by non-target objects, realizing an effective and accurate alarm.



Perimeter Protection

Supports people and vehicle classification, which significantly improves accuracy, reduces false alarms and decreases pixel count requirements for object detection.



Face Recognition

Supports recording of face image metadata and real-time crosschecking with incredible accuracy to locate the face image that matches the target's features.



Rich Features

Offers AI by camera features including Perimeter Protection, Face Detection, Heat Map, and People Counting.

NETWORK VIDEO RECORDERS

Lite AI Series

Lite AI Series

Model	NVR4832-I	NVR4416-16P-I	NVR4432-I	NVR4216-16P-I	NVR4216-I
Appearance					
Processor	Multi-core embedded processor	Multi-core embedded processor	Multi-core embedded processor	Multi-core embedded processor	Multi-core embedded processor
Video Compression	H.265+/H.264+	H.265+/H.264+	H.265+/H.264+	H.265+/H.264+	H.265+/H.264+
IP Video Inputs	32 channel	16 channel	32 channel	16 channel	16 channel
Max Input/Record	200Mbps/200Mbps	200Mbps/200Mbps	200Mbps/200Mbps	200Mbps/200Mbps	200Mbps/200Mbps
Max Decoding	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P
Display	1HDMI, 1VGA				
Max HDD	8x8TB	4x8TB	4x8TB	2x8TB	2x8TB
RAID	--	--	--	--	--
eSATA/Mini SAS	--	--	--	--	--
Audio In/Out	1/1, 2-way				
Alarm In/Out	16/4	16/4	16/4	4/2	4/2
Ethernet	2 Gigabit Ports	1 Gigabit Port	2 Gigabit Ports	1 Gigabit Port	1 Gigabit Port
PoE	--	16 Ports (IEEE802.3at/af) 1-8 PoE ports support ePoE&EoC Max 150W	--	16 Ports (IEEE802.3at/af) 1-8 PoE ports support ePoE&EoC Max 130W	--
USB	1 USB3.0, 2 USB2.0	1 USB3.0, 1 USB2.0			
Power	AC100V ~ 240V <7.4W (Without HDD)	AC100V ~ 240V <8.2W (Without HDD)	AC100V ~ 240V <7.0W (Without HDD)	AC100V ~ 240V <6.1W (Without HDD)	DC12V/4A <2.9W (Without HDD)
Star Features	P2P	ePoE&EoC, Plug & Play, P2P	P2P	ePoE&EoC, Plug & Play, P2P	P2P
Artificial Intelligence by Device					
Perimeter Protection	Up to 4 channel perimeter protection	Up to 4 channel perimeter protection	Up to 4 channel perimeter protection	Up to 4 channel perimeter protection	Up to 4 channel perimeter protection
Face Recognition	Up to 8 channels face recognition with FD camera; Up to 2 channels face recognition with normal camera; 10 face databases with up to 20,000 face images in total	Up to 8 channels face recognition with FD camera; Up to 2 channels face recognition with normal camera; 10 face databases with up to 20,000 face images in total	Up to 8 channels face recognition with FD camera; Up to 2 channels face recognition with normal camera; 10 face databases with up to 20,000 face images in total	Up to 8 channels face recognition with FD camera; Up to 2 channels face recognition with normal camera; 10 face databases with up to 20,000 face images in total	Up to 8 channels face recognition with FD camera; Up to 2 channels face recognition with normal camera; 10 face databases with up to 20,000 face images in total
SMD Plus	Up to 8 channel SMD Plus	Up to 8 channel SMD Plus	Up to 8 channel SMD Plus	Up to 8 channel SMD Plus	Up to 8 channel SMD Plus
Image search	Search by face images				
Artificial Intelligence by Camera					
SMD Plus	Supported	Supported	Supported	Supported	Supported
Perimeter Protection	Supported	Supported	Supported	Supported	Supported
Face Recognition	Supported	Supported	Supported	Supported	Supported
People Counting	Supported	Supported	Supported	Supported	Supported
Heat Map	Supported	Supported	Supported	Supported	Supported
ANPR	Supported	Supported	Supported	Supported	Supported

NETWORK VIDEO RECORDER


NETWORK VIDEO RECORDERS

Lite AI Series

Lite AI Series

Model	NVR4208-8P-I	NVR2108HS-I	NVR2104HS-I	NVR2108-I	NVR2104-I
Appearance					
Processor	Multi-core embedded processor	Multi-core embedded processor	Multi-core embedded processor	Multi-core embedded processor	Multi-core embedded processor
Video Compression	H.265+/H.264+	H.265+/H.264+	H.265+/H.264+	H.265+/H.264+	H.265+/H.264+
IP Video Inputs	8 channel	8 channel	4 channel	8 channel	4 channel
Max Input/Record	200Mbps/200Mbps	80Mbps/80Mbps	80Mbps/80Mbps	80Mbps/80Mbps	80Mbps/80Mbps
Max Decoding	2ch@8MP/8ch@1080P	1ch@8MP/4ch@1080P	1ch@8MP/4ch@1080P	1ch@8MP/4ch@1080P	1ch@8MP/4ch@1080P
Display	1HDMI, 1VGA	1HDMI, 1VGA	1HDMI, 1VGA	1HDMI, 1VGA	1HDMI, 1VGA
Max HDD	2x8TB	1x8TB	1x8TB	1x6TB	1x6TB
RAID	--	--	--	--	--
eSATA/Mini SAS	--	--	--	--	--
Audio In/Out	1/1, 2-way	1/1, 2-way	1/1, 2-way	1/1, 2-way	1/1, 2-way
Alarm In/Out	4/2	--	--	--	--
Ethernet	1 Gigabit Port	1x100M Port	1x100M Port	1x100M Port	1x100M Port
PoE	8 Ports (IEEE802.3at/af) 1-8 PoE ports support ePoE&EoC Max 130W	--	--	--	--
USB	1 USB3.0, 1 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0
Power	AC100V ~ 240V <6.0W (Without HDD)	DC12V/1.5A ≤6.0W (without HDD)	DC12V/1.5A ≤5.5W (without HDD)	DC12V/1.5A ≤6W (without HDD)	DC12V/1.5A ≤5.5W (without HDD)
Star Features	ePoE&EoC, Plug & Play, P2P	P2P	P2P	P2P	P2P
Artificial Intelligence by Device					
Perimeter Protection	Up to 4 channel perimeter protection	Up to 2 channel perimeter protection	Up to 2 channel perimeter protection	Up to 2 channel perimeter protection	Up to 2 channel perimeter protection
Face Recognition	Up to 8 channels face recognition with FD camera; Up to 2 channels face recognition with normal camera; 10 face databases with up to 20,000 face images in total	Up to 4 channels face recognition with FD camera; Up to 1 channel face recognition with normal camera; 10 face databases with up to 5,000 face images in total.	Up to 4 channels face recognition with FD camera; Up to 1 channel face recognition with normal camera; 10 face databases with up to 5,000 face images in total.	Up to 4 channels face recognition with FD camera; Up to 1 channel face recognition with normal camera; 10 face databases with up to 5,000 face images in total.	Up to 4 channels face recognition with FD camera; Up to 1 channel face recognition with normal camera; 10 face databases with up to 5,000 face images in total.
SMD Plus	Up to 8 channel SMD Plus	Up to 4 channel SMD Plus	Up to 4 channel SMD Plus	Up to 4 channel SMD Plus	Up to 4 channel SMD Plus
Image search	Search by face images	Search by face images	Search by face images	Search by face images	Search by face images
Artificial Intelligence by Camera					
SMD Plus	Supported	Supported	Supported	Supported	Supported
Perimeter Protection	Supported	Supported	Supported	Supported	Supported
Face Recognition	Supported	Supported	Supported	Supported	Supported
People Counting	Supported	--	--	--	--
Heat Map	Supported	--	--	--	--
ANPR	Supported	--	--	--	--

 • Extended PoE transmission: 800m, 10Mbps, 13w or 300m, 100Mbps, 25.4w
• ePoE only works with ePoE devices

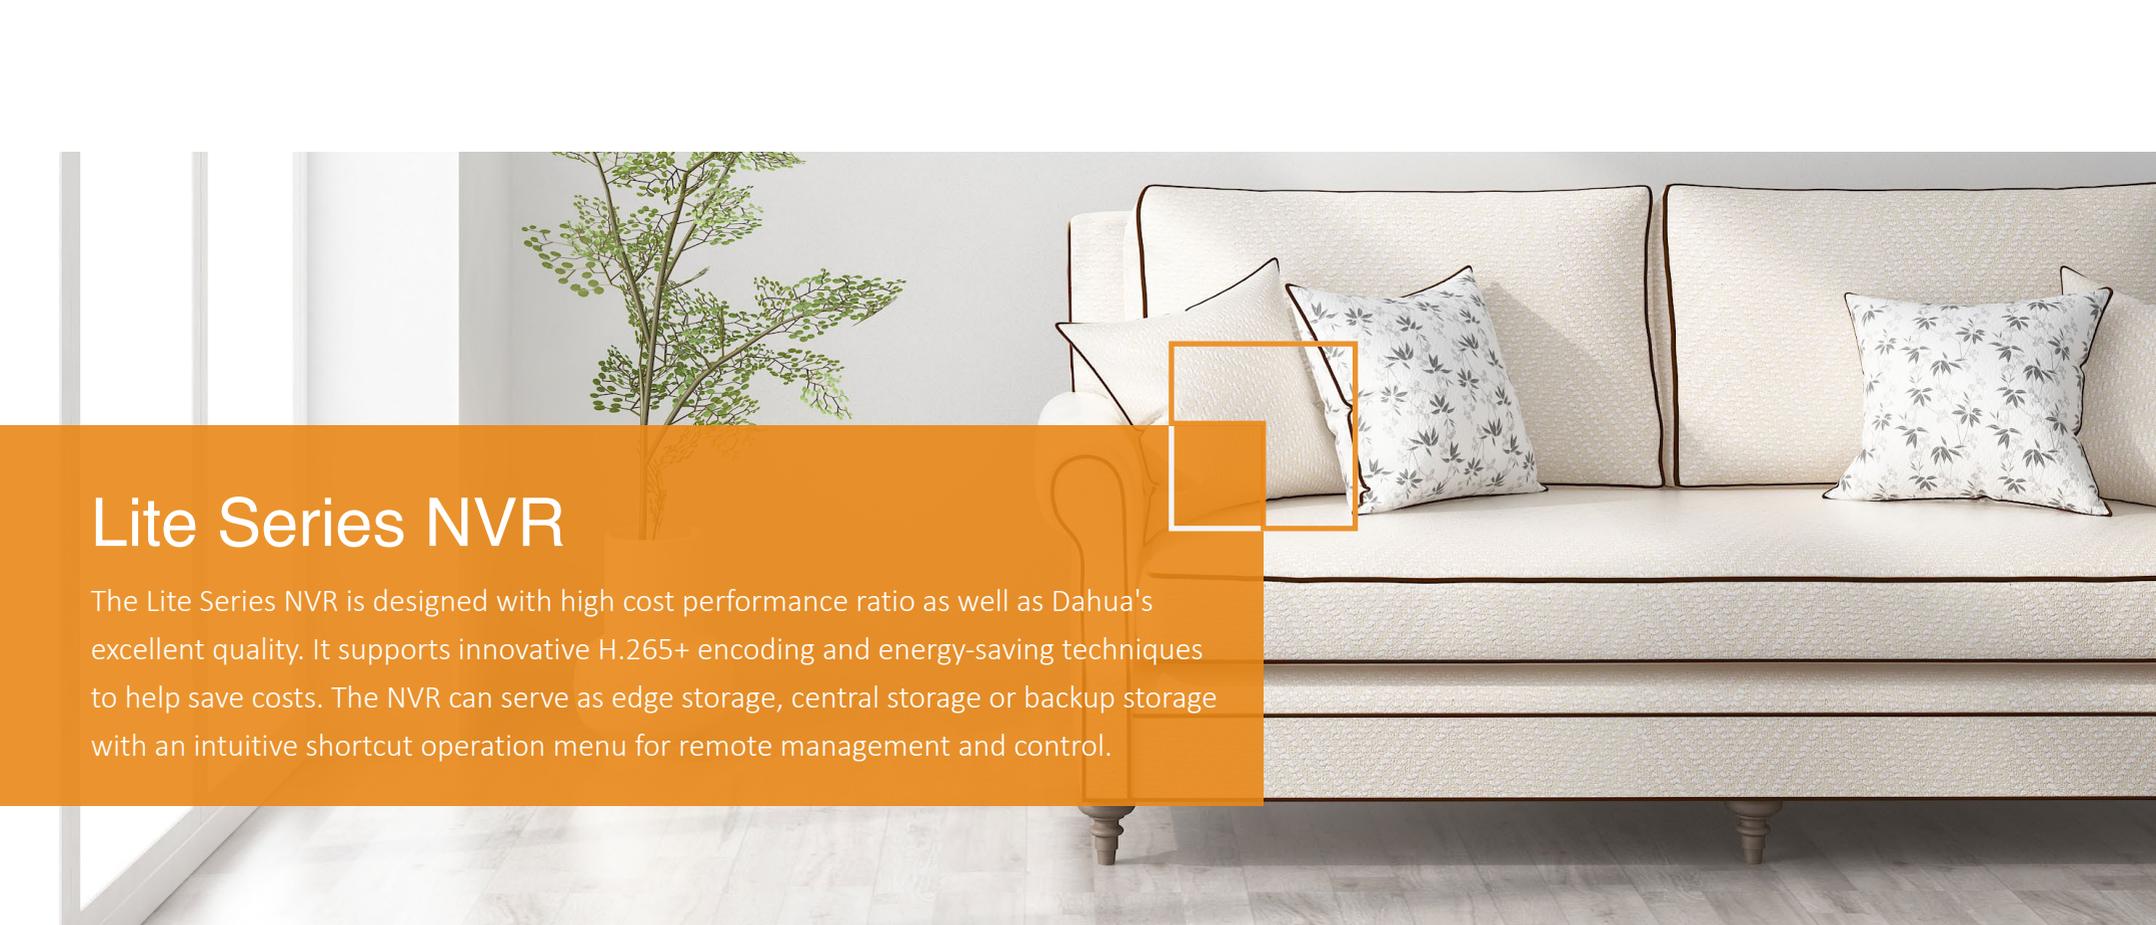

Lite Series NVR

The Lite Series NVR is designed with high cost performance ratio as well as Dahua's excellent quality. It supports innovative H.265+ encoding and energy-saving techniques to help save costs. The NVR can serve as edge storage, central storage or backup storage with an intuitive shortcut operation menu for remote management and control.



Smart H.265+ & Smart H.264+

Supports Smart H.265+/H.264+ decoding, providing high-quality videos and reducing storage and transmission costs.



UI 4.0

Adopts new UI 4.0 style which is more consistent with users' habits. Functional modules are divided properly to make them clearer and easier to understand.



Easy Setup

Plug&Play installation, P2P, and smart app for carefree surveillance.



More Features

Offers AI by camera features including Perimeter Protection, People Counting and Heat Map.

NETWORK VIDEO RECORDERS

Lite Series

4HDD Lite 4K & H.265 NVR

Model	NVR4432-4KS2	NVR4432-16P-4KS2	NVR4416-4KS2	NVR4416-16P-4KS2
Appearance	 	 	 	 
Processor	ARM Quad Core CPU	ARM Quad Core CPU	ARM Quad Core CPU	ARM Quad Core CPU
Video Compression	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
IP Video Inputs	32 channel	32 channel	16 channel	16 channel
Max Input/Record	200Mbps/200Mbps	200Mbps/200Mbps	200Mbps/200Mbps	200Mbps/200Mbps
Max Decoding	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P
Display	1 HDMI, 1 VGA	1 HDMI, 1 VGA	1 HDMI, 1 VGA	1 HDMI, 1 VGA
Max HDD	4x8TB	4x8TB	4x8TB	4x8TB
RAID	--	--	--	--
eSATA/Mini SAS	--	--	--	--
Audio In/Out	1/1, 2-way	1/1, 2-way	1/1, 2-way	1/1, 2-way
Alarm In/Out	16/4	16/4	16/4	16/4
Ethernet	2 Gigabit Ports	1 Gigabit Port	2 Gigabit Ports	1 Gigabit Port
PoE	--	16 Ports (IEEE802.3at/af) Max 150W	--	16 Ports (IEEE802.3at/af) Max 150W
USB	1 USB3.0, 2 USB2.0	1 USB3.0, 1 USB2.0	1 USB3.0, 1 USB2.0	1 USB3.0, 1 USB2.0
Power	AC100V~240V <11.7W (Without HDD)	AC100V~240V <13.7W (Without HDD)	AC100V~240V <11.7W (Without HDD)	AC100V~240V <13.7W (Without HDD)
Star Features	P2P	Plug & Play, P2P	P2P	Plug & Play, P2P
Artificial Intelligence by Camera				
SMD Plus	Supported	Supported	Supported	Supported
Perimeter Protection	Supported	Supported	Supported	Supported
Face Recognition	--	--	--	--
People Counting	Supported	Supported	Supported	Supported
Heat Map	Supported	Supported	Supported	Supported
ANPR	--	--	--	--

NETWORK VIDEO RECORDERS

Lite Series

2HDD Lite 4K & H.265 NVR

Model	NVR4232-4KS2	NVR4216-4KS2	NVR4208-4KS2	NVR4216-16P-4KS2	NVR4208-8P-4KS2	NVR4204-P-4KS2
Appearance	 	 	 	 	 	 
Processor	ARM Quad Core CPU	ARM Quad Core CPU	ARM Quad Core CPU	ARM Quad Core CPU	ARM Quad Core CPU	ARM Quad Core CPU
Video Compression	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
IP Video Inputs	32 channel	16 channel	8 channel	16 channel	8 channel	4 channel
Max Input/Record	200Mbps/200Mbps	200Mbps/200Mbps	200Mbps/200Mbps	200Mbps/200Mbps	200Mbps/200Mbps	200Mbps/200Mbps
Max Decoding	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P
Display	1 HDMI, 1 VGA	1 HDMI, 1 VGA	1 HDMI, 1 VGA	1 HDMI, 1 VGA	1 HDMI, 1 VGA	1 HDMI, 1 VGA
Max HDD	2x8TB	2x8TB	2x8TB	2x8TB	2x8TB	2x8TB
RAID	--	--	--	--	--	--
eSATA/Mini SAS	--	--	--	--	--	--
Audio In/Out	1/1, 2-way	1/1, 2-way	1/1, 2-way	1/1, 2-way	1/1, 2-way	1/1, 2-way
Alarm In/Out	4/2	4/2	4/2	4/2	4/2	4/2
Ethernet	1 Gigabit Port	1 Gigabit Port	1 Gigabit Port	1 Gigabit Port	1 Gigabit Port	1 Gigabit Port
PoE	--	--	--	16 Ports (IEEE802.3at/af) Max 130W	8 Ports (IEEE802.3at/af) Max 130W	4 Ports (IEEE802.3at/af) Max 50W
USB	1 USB3.0, 1 USB2.0	1 USB3.0, 1 USB2.0	1 USB3.0, 1 USB2.0	1 USB3.0, 1 USB2.0	1 USB3.0, 1 USB2.0	1 USB3.0, 1 USB2.0
Power	DC12V/4A <6.9W (Without HDD)	DC12V/4A <6.9W (Without HDD)	DC12V/4A <6.9W (Without HDD)	AC100V~240V <13.2W (Without HDD)	AC100V~240V <9.6W (Without HDD)	DC48V/2A <9W (Without HDD)
Star Features	P2P	P2P	P2P	Plug & Play, P2P	Plug & Play, P2P	Plug & Play, P2P
Artificial Intelligence by Camera						
SMD Plus	Supported	Supported	Supported	Supported	Supported	Supported
Perimeter Protection	Supported	Supported	Supported	Supported	Supported	Supported
Face Recognition	--	--	--	--	--	--
People Counting	Supported	Supported	Supported	Supported	Supported	Supported
Heat Map	Supported	Supported	Supported	Supported	Supported	Supported
ANPR	--	--	--	--	--	--

NETWORK VIDEO RECORDERS

Lite Series

1HDD Compact 1U Lite 4K & H.265 NVR

Model	NVR4108HS-4KS2	NVR4104HS-4KS2	NVR4108HS-8P-4KS2	NVR4104HS-P-4KS2
Appearance	 	 	 	 
Processor	ARM Quad Core CPU	ARM Quad Core CPU	ARM Quad Core CPU	ARM Quad Core CPU
Video Compression	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
IP Video Inputs	8 channel	4 channel	8 channel	4 channel
Max Input/Record	80Mbps/80Mbps	80Mbps/80Mbps	80Mbps/80Mbps	80Mbps/80Mbps
Max Decoding	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P
Display	1 HDMI, 1 VGA	1 HDMI, 1 VGA	1 HDMI, 1 VGA	1 HDMI, 1 VGA
Max HDD	1×8TB	1×8TB	1×8TB	1×8TB
RAID	--	--	--	--
eSATA/Mini SAS	--	--	--	--
Audio In/Out	1/1, 2-way	1/1, 2-way	1/1, 2-way	1/1, 2-way
Alarm In/Out	--	--	--	--
Ethernet	1×100M Port	1×100M Port	1×100M Port	1×100M Port
PoE	--	--	8 Ports (IEEE802.3at/af), Max 80W	4 Ports (IEEE802.3at/af) Max 50W
USB	2 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0
Power	DC12V/2A <6.3W (Without HDD)	DC12V/2A <6.3W (Without HDD)	DC48V/2A <8.3W (Without HDD)	DC48V/1.5A <7.5W (Without HDD)
Star Features	P2P	P2P	Plug & Play, P2P	Plug & Play, P2P
Artificial Intelligence by Camera				
SMD Plus	Supported	Supported	Supported	Supported
Perimeter Protection	Supported	Supported	Supported	Supported
Face Recognition	--	--	--	--
People Counting	Supported	Supported	Supported	Supported
Heat Map	Supported	Supported	Supported	Supported
ANPR	--	--	--	--

NETWORK VIDEO RECORDERS

Lite Series

1HDD Smart 1U Lite 4K & H.265 NVR

Model	NVR4108-4KS2	NVR4104-4KS2	NVR4108-8P-4KS2	NVR4104-P-4KS2
Appearance	 	 	 	 
Processor	ARM Quad Core CPU	ARM Quad Core CPU	ARM Quad Core CPU	ARM Quad Core CPU
Video Compression	H.265+/H.265 H.264+/H.264	H.265+/H.265 H.264+/H.264	H.265+/H.265 H.264+/H.264	H.265+/H.265 H.264+/H.264
IP Video Inputs	8 channel	4 channel	8 channel	4 channel
Max Input/Record	80Mbps/80Mbps	80Mbps/80Mbps	80Mbps/80Mbps	80Mbps/80Mbps
Max Decoding	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P	2ch@8MP/8ch@1080P
Display	1 HDMI, 1 VGA	1 HDMI, 1 VGA	1 HDMI, 1 VGA	1 HDMI, 1 VGA
Max HDD	1×8TB	1×8TB	1×8TB	1×8TB
RAID	--	--	--	--
eSATA/Mini SAS	--	--	--	--
Audio In/Out	1/1, 2-way	1/1, 2-way	1/1, 2-way	1/1, 2-way
Alarm In/Out	--	--	--	--
Ethernet	1×100M Port	1×100M Port	1×100M Port	1×100M Port
PoE	--	--	8 Ports (IEEE802.3at/af) Max 80W	4 Ports (IEEE802.3at/af) Max 50W
USB	2 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0
Power	DC12V/2A <6.3W (Without HDD)	DC12V/2A <6.3W (Without HDD)	DC48V/2A <8.3W (Without HDD)	DC48V/1.5A <7.5W (Without HDD)
Star Features	P2P	P2P	Plug & Play, P2P	Plug & Play, P2P
Artificial Intelligence by Camera				
SMD Plus	Supported	Supported	Supported	Supported
Perimeter Protection	Supported	Supported	Supported	Supported
Face Recognition	--	--	--	--
People Counting	Supported	Supported	Supported	Supported
Heat Map	Supported	Supported	Supported	Supported
ANPR	--	--	--	--

NETWORK VIDEO RECORDERS

Lite H.265 Series

	1HDD Lite 4K & H.265 NVR				1HDD Lite 4K & H.265 NVR			
Model	NVR2108HS-4KS2	NVR2104HS-4KS2	NVR2108HS-8P-4KS2	NVR2104HS-P-4KS2	NVR2108-4KS2	NVR2104-4KS2	NVR2108-8P-4KS2	NVR2104-P-4KS2
Appearance	 	 	 	 	 	 	 	 
Processor	ARM Quad Core CPU	ARM Quad Core CPU	ARM Quad Core CPU	ARM Quad Core CPU	ARM Quad Core CPU	ARM Quad Core CPU	ARM Quad Core CPU	ARM Quad Core CPU
Video Compression	H.265+/H.265 H.264+/H.264	H.265+/H.265 H.264+/H.264	H.265+/H.265 H.264+/H.264	H.265+/H.265 H.264+/H.264	H.265+/H.265 H.264+/H.264	H.265+/H.265 H.264+/H.264	H.265+/H.265 H.264+/H.264	H.265+/H.265 H.264+/H.264
IP Video Inputs	8 channel	4 channel	8 channel	4 channel	8 channel	4 channel	8 channel	4 channel
Max Input/Record	80Mbps/80Mbps	80Mbps/80Mbps	80Mbps/80Mbps	80Mbps/80Mbps	80Mbps/80Mbps	80Mbps/80Mbps	80Mbps/80Mbps	80Mbps/80Mbps
Max Decoding	1ch@8MP/4ch@1080P	1ch@8MP/4ch@1080P	1ch@8MP/4ch@1080P	1ch@8MP/4ch@1080P	1ch@8MP/4ch@1080P	1ch@8MP/4ch@1080P	1ch@8MP/4ch@1080P	1ch@8MP/4ch@1080P
Display	1 HDMI, 1 VGA	1 HDMI, 1 VGA	1 HDMI, 1 VGA	1 HDMI, 1 VGA	1 HDMI, 1 VGA	1 HDMI, 1 VGA	1 HDMI, 1 VGA	1 HDMI, 1 VGA
Max HDD	1x8TB	1x8TB	1x8TB	1x8TB	1x8TB	1x8TB	1x8TB	1x8TB
RAID	--	--	--	--	--	--	--	--
eSATA/Mini SAS	--	--	--	--	--	--	--	--
Audio In/Out	1/1, 2-way	1/1, 2-way	1/1, 2-way	1/1, 2-way	1/1, 2-way	1/1, 2-way	1/1, 2-way	1/1, 2-way
Alarm In/Out	--	--	--	--	--	--	--	--
Ethernet	1x100M Port	1x100M Port	1 Gigabit Port	1x100M Port	1x100M Port	1x100M Port	1 Gigabit Port	1x100M Port
PoE	--	--	8 Ports (IEEE802.3at/af) Max 80W	4 Ports (IEEE802.3at/af) Max 50W	--	--	8 Ports (IEEE802.3at/af) Max 80W	4 Ports (IEEE802.3at/af) Max 50W
USB	2 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0
Power	DC12V/2A <3W(Without HDD)	DC12V/2A <3W(Without HDD)	DC48V/2A <5.8W(Without HDD)	DC48V/1.25A <5.3W(Without HDD)	DC12V/2A <3W(Without HDD)	DC12V/2A <3W(Without HDD)	DC48V/2A <5.8W(Without HDD)	DC48V/1.25A <5.3W(Without HDD)
Star Features	P2P	P2P	Plug & Play, P2P	Plug & Play, P2P	P2P	P2P	Plug & Play, P2P	Plug & Play, P2P
Artificial Intelligence by Camera								
SMD Plus	Supported	Supported	Supported	Supported	Supported	Supported	Supported	Supported
Perimeter Protection	--	--	--	--	--	--	--	--
Face Recognition	--	--	--	--	--	--	--	--
People Counting	--	--	--	--	--	--	--	--
Heat Map	--	--	--	--	--	--	--	--
ANPR	--	--	--	--	--	--	--	--

NETWORK THERMAL CAMERAS



Security

Dahua adopts clearer, more cost-effective sensors and AI technology to provide all-weather monitoring, as well as timely and accurate alarms in order to protect the safety of SMB users' property.



Perimeter Protection

With the simple background of a thermal image and built-in AI algorithm, it supports classification of human and vehicle that significantly improves alarm accuracy.



Advance Fire Detection

Dual-channel monitoring allows thermal cameras to detect the early source of the fire, and visibly track it in the system.



Excellent Environmental Adaptability

The Dahua thermal camera can penetrate through fog and haze, allowing it to capture clear images in any light conditions, whether it's day or night.



Smoking Detection

The Dual-channel detection algorithm can effectively identify smoking behavior in the image.

NETWORK THERMAL CAMERAS

Security

	Model	TPC-SD2221	TPC-BF2221	TPC-BF1241	TPC-DF1241
Appearance			 		
Thermal	Image sensor	Uncooled VOx Microbolometer	Uncooled VOx Microbolometer	Uncooled VOx Microbolometer	Uncooled VOx Microbolometer
	Effective Pixels	256(H) × 192(V)	256(H) × 192(V)	256(H) × 192(V)	256(H) × 192(V)
	Sensitivity	≤50mK	≤50mK	≤50mK	≤50mK
	Lens	3.5mm/7mm	3.5mm/7mm	3.5mm/7mm/10mm	2mm/3.5mm/7mm
	FOV-H	H: 50.6°/24°	H: 50.6°/24°	H: 50.6°/24°/17.3°	H: 87.8°/50.6°/24°
Visible	Image sensor	1/2.8" 2M CMOS	1/2.8" 2M CMOS	1/2.7" 4M CMOS	1/2.7" 4M CMOS
	Lens	4mm/8mm	4mm/8mm	4mm/8mm/12mm	2mm/4mm/8mm
	FOV-H	H: 84°/40°	H: 84°/40°	H: 84°/40°/22°	H: 94°/84°/40°
	Min. Illumination	0.005Lux (Color) 0.0005Lux (B/W) 0Lux (IR On)	0.005Lux (Color) 0.0005Lux (B/W) 0Lux (IR On)	0.05Lux (Color) 0.005Lux (B/W) 0Lux (IR On)	0.05Lux (Color) 0.005Lux (B/W) 0Lux (IR On)
	IR Distance	35m/50m	35m/50m	30m	30m
General	Video Compression	H.265/H.264/MJPEG	H.265/H.264/MJPEG	H.265/H.264M/H.264H/H.264B/MJEPG	H.265/H.264M/H.264H/H.264B/MJEPG
	Frame Rate	Thermal: 1280*960/XVGA/VGA/256*192 @25/30fps Visible: 1080P/720P/D1/CIF @25/30fps	Thermal: 1280*960/XVGA/VGA/256*192 @25/30fps Visible: 1080P/720P/D1/CIF @25/30fps	Thermal: 1280*960/XVGA/VGA/256*192 @25/30fps Visible: 2336*1752/1080P/720P/D1/CIF @25/30fps	Thermal: 1280*960/XVGA/VGA/256*192 @25/30fps Visible: 2336*1752/1080P/720P/D1/CIF @25/30fps
	Pan/Tilt Range	300 presets, Pan: 0° ~ 360° endless, Tilt: -15° ~ 90°	--	--	--
	Intelligent Video	IVS, Human/Vehicle Classification, Fire Detection & Alarm, Cold/Hot Spot Tracing	IVS, Human/Vehicle Classification, Fire Detection & Alarm, Cold/Hot Spot Tracing	IVS, Human/Vehicle Classification, Fire Detection & Alarm, Cold/Hot Spot Tracing	IVS, Human/Vehicle Classification, Fire Detection & Alarm, Cold/Hot Spot Tracing
	Compatibility	ONVIF Profile S&G, API	ONVIF Profile S&G, API	ONVIF Profile S&G, CGI	ONVIF Profile S&G, CGI
	Ingress Protection	IP66	IP67	IP67	IP67
	Working Temperature	-30°C ~ +60°C	-30°C ~ +60°C	-30°C ~ +60°C	-30°C ~ +60°C
	Power	DC12V/PoE+, <24W	DC12V/PoE/ePoE, <12W	DC12V/PoE, <13W	DC12V/PoE, <13W

Thermography

Designed for industrial temperature measurement, it is equipped with highly efficient sensors and industry-leading high-precision temperature measurement algorithm. It supports flexible temperature measurement rule setting to help users monitor the status of the equipment in real time.



Flexible Rules

Supports point, line, and area temperature measurement rule setting and displays the highest, lowest or average temperature. It also supports up to 12 rules simultaneously in one scene.



High Accuracy

Wide temperature measurement range from -20°C to 550°C, with high accuracy up to $\pm 5^\circ\text{C}$ or $\pm 5\%$ (whichever is greater).



Real-time Alarm

Online, long distance, and non-contact 24/7 temperature measurement, with millisecond response speed.

NETWORK THERMAL CAMERAS


Thermography

	Model	TPC-SD2221-T	TPC-BF2221-T
Appearance			
Thermal	Image sensor	Uncooled VOx Microbolometer	Uncooled VOx Microbolometer
	Effective Pixels	256(H) × 192(V)	256(H) × 192(V)
	Sensitivity	≤50mK	≤50mK
	Lens	3.5mm/7mm	3.5mm/7mm
	FOV-H	H: 50.6°/24°	H: 50.6°/24°
	Temperature Range & Accuracy	Low temperature mode:-20°C ~ +150°C High temperature mode: 0°C ~ +550°C Max (±5°C, ±5%) Operating temperature:-10°C ~ +50°C	Low temperature mode:-20°C ~ +150°C High temperature mode: 0°C ~ +550°C Max (±5°C, ±5%) Operating temperature:-10°C ~ +50°C
	Measurement Rule	Spot: 12 Line: 12 Area: 12 Supports 12 rules simultaneously	Spot: 12 Line: 12 Area: 12 Supports 12 rules simultaneously
Temperature Alarm	Supported	Supported	
Visible	Image sensor	1/2.8" 2M CMOS	1/2.8" 2M CMOS
	Lens	4mm/8mm	4mm/8mm
	FOV-H	H: 84°/40°	H: 84°/40°
	Min. Illumination	0.005Lux (Color) 0.0005Lux (B/W) 0Lux (IR On)	0.005Lux (Color) 0.0005Lux (B/W) 0Lux (IR On)
	IR Distance	35m/50m	35m/50m
General	Video Compression	H.265/H.264/MJPEG	H.265/H.264/MJPEG
	Frame Rate	Thermal: 1280*960/XVGA/VGA/256*192 @25/30fps Visible: 1080P/720P/D1/CIF @25/30fps	Thermal: 1280*960/XVGA/VGA/256*192 @25/30fps Visible: 1080P/720P/D1/CIF @25/30fps
	Pan/Tilt Range	300 presets, Pan: 0° ~ 360° endless, Tilt:-15° ~ 90°	--
	Intelligent Video	IVS, Human/Vehicle Classification, Fire Detection & Alarm, Cold/Hot Spot Tracing	IVS, Human/Vehicle Classification, Fire Detection & Alarm, Cold/Hot Spot Tracing
	Compatibility	ONVIF Profile S&G, API	ONVIF Profile S&G, API
	Ingress Protection	IP66	IP67
	Working Temperature	-30°C ~ +60°C	-30°C ~ +60°C
Power	DC12V/PoE+, <24W	DC12V/PoE/ePoE, <12W	

NETWORK THERMAL CAMERAS

TRANSMISSION



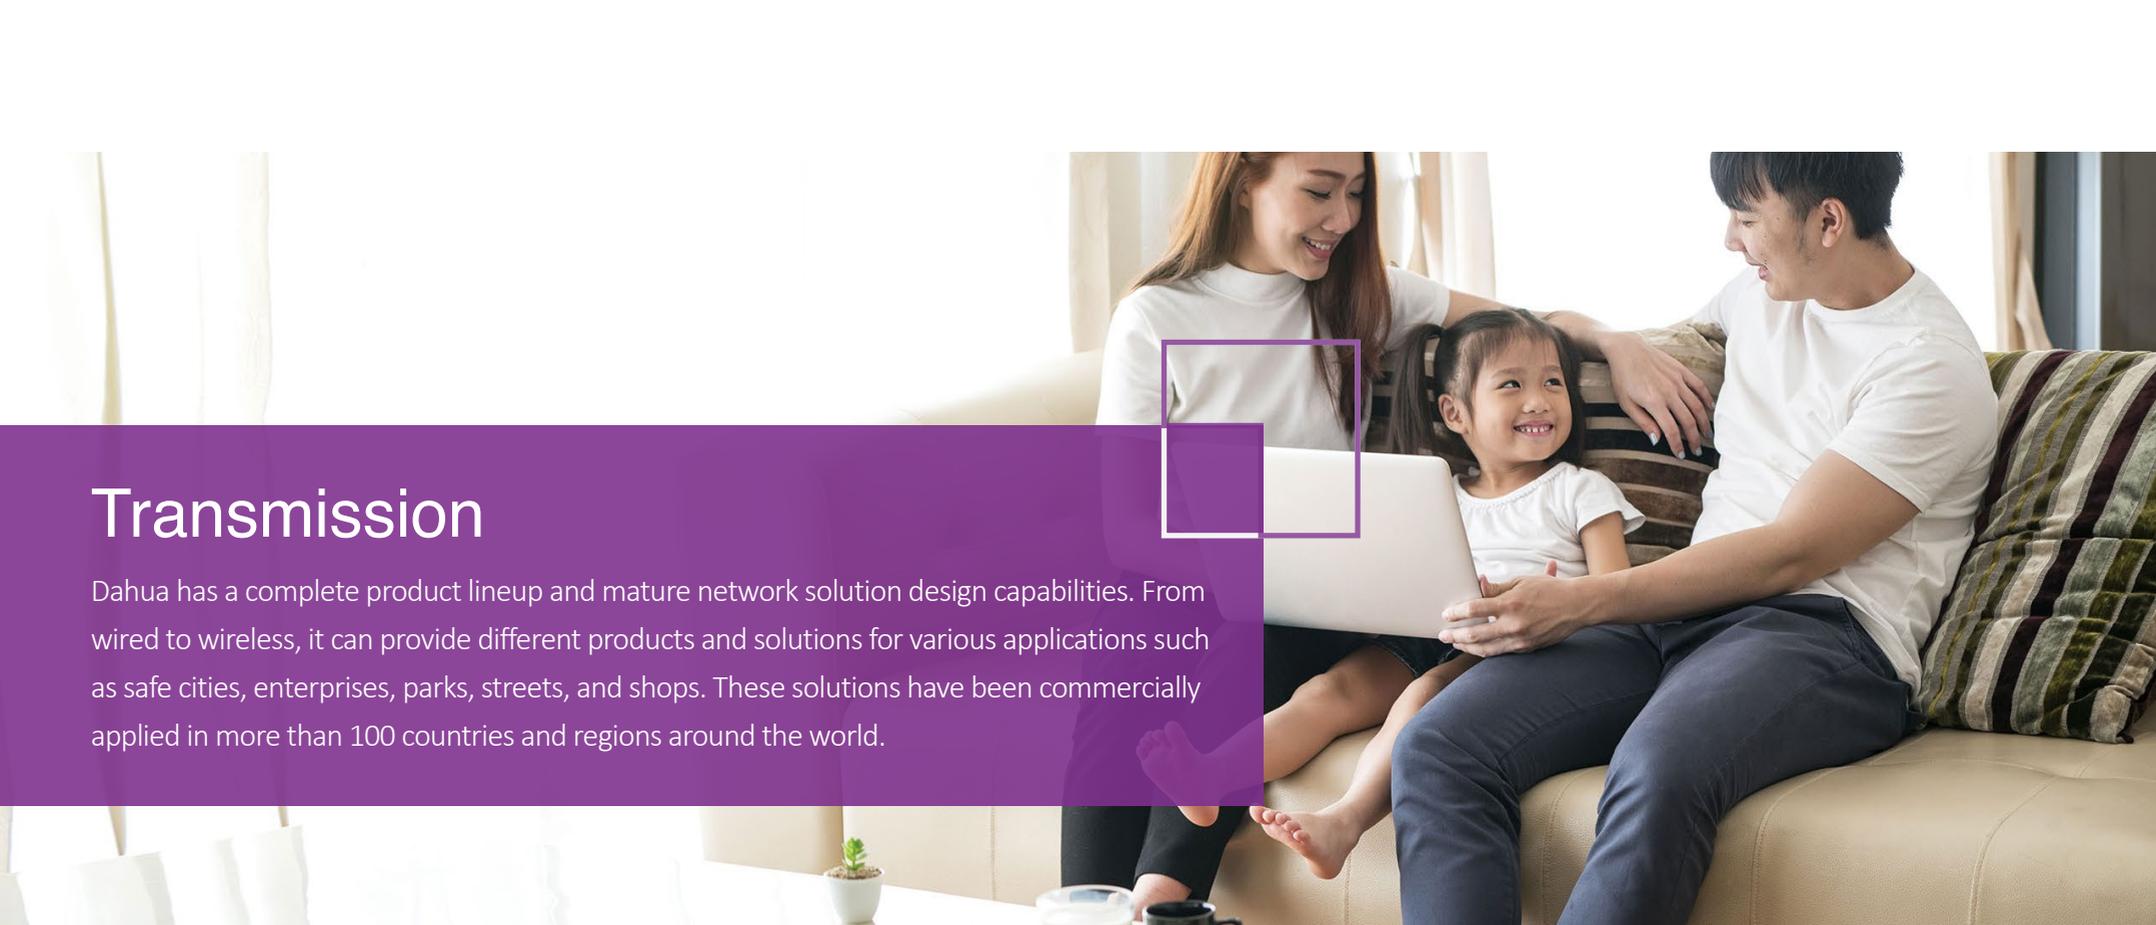

Transmission

Dahua has a complete product lineup and mature network solution design capabilities. From wired to wireless, it can provide different products and solutions for various applications such as safe cities, enterprises, parks, streets, and shops. These solutions have been commercially applied in more than 100 countries and regions around the world.



High Protection

High surge/ESD protection protect the switches not to be damaged.



Wide Working Temperature Design

With wider working temperature compared to normal commercial switches, Dahua PoE Switch is able to work in non-standard machine room and other harsh environment in security system.



Long Distance PoE

250 meters PoE transmission, which is convenient and also save cost in construction.



Intelligent PoE

- Guarantee power supply for VIP ports.
- Real-time monitoring to guarantee proper function.

TRANSMISSION

PoE Switch

Desktop PoE Switch

Model	PFS3005-4ET-60	PFS3006-4ET-60	PFS3006-4GT-60	PFS3008-8GT-96	PFS3009-8ET1GT-96
Appearance					
Fast/Gigabit Ethernet	4FE PoE+1FE	4FE PoE+2FE	4GE PoE+2GE	8GE PoE	8 FE PoE + 1GE
SFP Slots	--	--	--	--	--
Switching Capacity	1Gbps	1.8Gbps	14Gbps	20Gbps	3.6 Gbps
Packet Forwarding Rate	744Kpps	890Kpps	8.93 Mpps	11.9Mpps	2.68 Mpps
Packet Buffer Memory	448Kb	768Kb	1Mb	1.5Mb	1Mb
MAC Table Size	1K	2K	2K	8K	2K
PoE Standard	PoE (802.3af), PoE+ (802.3at),Hi-PoE	PoE (802.3af), PoE+ (802.3at),Hi-PoE	PoE (802.3af), PoE+ (802.3at),Hi-PoE	PoE (802.3af), PoE+ (802.3at),Hi-PoE	PoE (802.3af), PoE+ (802.3at), HI-PoE
PoE Budget	60W	60W	60W	96W	96W
Long Distance PoE Transmission	Yes (250 meters)	Yes (250 meters)	--	--	Yes (250 meters)
VLAN	--	--	--	--	--
Link Aggregation	--	--	--	--	--
Flow Control	Supported	Supported	Supported	Supported	Supported
Spanning Tree	--	--	--	--	--
Management	--	--	--	--	--
Lightning Protection	Common Mode 2KV Differential Mode 1KV	Common Mode 2KV Differential Mode 0.5KV	Common Mode 2KV Differential Mode 1KV	Common Mode 2KV Differential Mode 0.5KV	Common Mode 4KV Differential Mode 2KV
Working Temperature	-10°C ~ +55°C (14°F~+131°F)	-10°C ~ +55°C (14°F~+131°F)	-10°C ~ +55°C (14°F~+131°F)	-10°C ~ +55°C (14°F~+131°F)	-10°C ~ +55°C (14°F~+131°F)
Dimensions (WxDxH)	130 x 85 x 26 mm (5.1"x3.3"x1.0")	130 x 85 x 26 mm (5.1"x3.3"x1.0")	130 x 85 x 26 mm (5.1"x3.3"x1.0")	190 x 100 x 30 mm (7.5"x3.9"x1.2")	190 x 100 x 30 mm (7.5"x3.9"x1.2")

PoE Switch

Desktop PoE Switch

Model	PFS3010-8ET-96	PFS3117-16ET-135	PFS3125-24ET-190	PFS4218-16ET-190/240	PFS4226-24ET-240/360
Appearance					
Fast/Gigabit Ethernet	8 FE PoE + 2GE	16FE PoE+1GE (Combo)	24FE PoE + 1GE (Combo)	16FE PoE+2GE (Combo)	24FE PoE+2GE (Combo)
SFP Slots	--	1GE SFP (Combo)	1GE SFP (Combo)	2GE SFP (Combo)	2GE SFP (Combo)
Switching Capacity	5.6Gbps	5.2Gbps	6.8Gbps	8.8Gbps	8.8Gbps
Packet Forwarding Rate	4.17Mpps	3.87Mpps	5.06Mpps	5.36Mpps	6.55Mpps
Packet Buffer Memory	4Mb	2.75M	4Mb	2.75Mb	2.75Mb
MAC Table Size	16K	4K	16K	4K	4K
PoE Standard	PoE (802.3af), PoE+ (802.3at), Hi-PoE	PoE (802.3af), PoE+ (802.3at), Hi-PoE	PoE (802.3af), PoE+ (802.3at), Hi-PoE	PoE (802.3af), PoE+ (802.3at), Hi-PoE	PoE (802.3af), PoE+ (802.3at), Hi-PoE
PoE Budget	96W	135W	190W	190W/240W	240W/360W
Long Distance PoE Transmission	Yes (250 meters)	Yes (250 meters)	Yes (250 meters)	Yes (250 meters)	Yes (250 meters)
VLAN	--	-	-	Supported	Supported
Link Aggregation	--	-	-	Supported	Supported
Flow Control	Supported	Supported	Supported	Supported	Supported
Spanning Tree	--	-	-	Supported	Supported
Management	--	-	-	Web	Web
Lightning Protection	Common Mode 2KV Differential Mode 0.5KV	Common Mode 2KV Differential Mode 0.5KV	Common Mode 2KV Differential Mode 0.5KV	Common Mode 4KV Differential Mode 2KV	Common Mode 4KV Differential Mode 2KV
Working Temperature	-10°C ~ +55°C (14°F~+131°F)	0°C ~ +40°C (32°F ~ +104°F)	0°C ~ +40°C (32°F ~ +104°F)	-10°C ~ +55°C (14°F~+131°F)	-10°C ~ +55°C (14°F~+131°F)
Dimensions (WxDxH)	190 x 100 x 30 mm (7.5"x3.9"x1.2")	340 x 200 x 43 mm (13.4"x7.9"x1.7")	340 x 200 x 43 mm (13.4"x7.9"x1.7")	440 x 300 x 44 mm (17.3"x11.8"x1.7")	440 x 300 x 44 mm (17.3"x11.8"x1.7")

TRANSMISSION

PoE Switch

Hardened PoE Switch

Flat PoE Switch

Model	PFS3103-1GT1ET-60	PFS3106-4ET-60	PFS3110-8ET-96	PFS3211-8GT-120	PFS3111-8ET-96-F
Appearance					
Fast/Gigabit Ethernet	1FE PoE+1GE PoE	4FE PoE+1GE	8FE PoE+1GE	8GE PoE+1GE	8FE PoE+2GE
SFP Slots	1GE SFP	1GE SFP	1GE SFP	2GE SFP	1GE SFP
Switching Capacity	6.8Gbps	6.8Gbps	7.6Gbps	33Gbps	13.6Gbps
Packet Forwarding Rate	3.12Mpps	3.57Mpps	4.17Mpps	16.37Mpps	5.65Mpps
Packet Buffer Memory	2Mb	1Mb	1Mb	1.75Mb	2Mb
MAC Table Size	8K	8K	8K	4K	8K
PoE Standard	PoE (802.3af), PoE+ (802.3at),Hi-PoE	PoE (802.3af), PoE+ (802.3at),Hi-PoE	PoE (802.3af), PoE+ (802.3at),Hi-PoE	PoE (802.3af), PoE+ (802.3at),Hi-PoE	PoE (802.3af), PoE+ (802.3at),Hi-PoE
PoE Budget	60W	60W	96W	120W	96W
Long Distance PoE Transmission	--	--	--	-	Port1-4 (250 meters)
VLAN	--	--	--	-	--
Link Aggregation	--	--	--	-	--
Flow Control	Supported	Supported	Supported	Supported	Supported
Spanning Tree	--	--	--	-	--
Management	--	--	--	-	--
Lightning Protection	Common Mode 4KV Differential Mode 2KV	Common Mode 6KV Differential Mode 4KV	Common Mode 6KV Differential Mode 4KV	Common Mode 4KV Differential Mode 2KV	Common Mode 4KV Differential Mode 2KV
Working Temperature	-30°C~+65°C (-22°F~+149°F)	-30°C~+65°C (-22°F~+149°F)	-30°C ~ +65°C (-22°F~+149°F)	-30°C ~ +65°C (-22°F~+149°F)	-30°C ~ +65°C (-22°F~+149°F)
Dimensions (WxDxH)	105 x 75 x30 mm (4.1"x3.0"x1.2")	150 x 100 x 30 mm (5.9"x3.9"x1.2")	150 x 100 x 42 mm (5.9"x3.9"x1.7")	150 x 110 x 42 mm (5.9"x4.3"x1.7")	158 x 130 x 25 mm (6.2"x5.1"x1.0")

Access Switch

	Plastic Switch				Metal Switch	
Model	PFS3005-5ET-L	PFS3005-5GT-L	PFS3008-8ET-L	PFS3008-8GT-L	PFS3005-5GT	PFS3008-8GT
Appearance						
Fast/Gigabit Ethernet	5FE	5GE	8FE	8GE	5GE	8GE
SFP Slots	--	--	--	--	--	--
Switching Capacity	1Gbps	1Gbps	1.6Gbps	16Gbps	10Gbps	16Gbps
Packet Forwarding Rate	0.744Mpps	7.44Mpps	1.19Mpps	11.9Mpps	7.44Mpps	11.9Mpps
Packet Buffer Memory	448kb	1.5Mb	448kb	1.5Mb	1Mb	1.5Mb
MAC Table Size	1K	2K	1K	2K	2K	4K
PoE Standard	--	--	--	--	--	--
PoE Budget	--	--	--	--	--	--
Long PoE Transmission	--	--	--	--	--	--
VLAN	--	--	--	--	--	--
Link Aggregation	--	--	--	--	--	--
Flow Control	--	--	--	--	--	--
Spanning Tree	--	--	--	--	--	--
Management	--	--	--	--	--	--
Protection	Common Mode 2KV	Common Mode 2KV	Common Mode 2KV	Common Mode 2KV	Common Mode 4KV Differential Mode 0.5KV	Common Mode 4KV Differential Mode 0.5KV
Working Temperature	-10°C~+55°C (14°F~+131°F)	-10°C~+55°C (14°F~+131°F)	-10°C~+55°C (14°F~+131°F)	-10°C~+55°C (14°F~+131°F)	0°C~+40°C (32°F~+104°F)	0°C~+40°C (32°F~+104°F)
Dimensions (WxDxH)	77 x 46 x 21 mm (3.03"x1.81"x0.83")	125 x 65 x 22 mm (4.92"x2.56"x0.87")	125 x 65 x 22 mm (4.92"x2.56"x0.87")	125 x 65 x 22 mm (4.92"x2.56"x0.87")	100 x 64 x 25 mm (3.9"x2.5"x1.0")	186 x 106 x 33 mm (7.3"x4.2"x1.3")

TRANSMISSION

Access Switch

Metal Switch

Model	PFS3016-16GT	PFS3024-24GT	PFS3106-4T	PFS3110-8T	PFS3409-4GT	PFS3211-8GT
Appearance						
Fast/Gigabit Ethernet	16GE	24GE	4FE+1GE	8FE+1GE	5GE	9GE
SFP Slots	--	--	1GE SFP	1GE SFP	4GE SFP	2GE SFP
Switching Capacity	32Gbps	48Gbps	6.8Gbps	13.6Gbps	33Gbps	33Gbps
Packet Forwarding Rate	23.8Mpps	35.7Mpps	3.57Mpps	4.17Mpps	16.37Mpps	16.37Mpps
Packet Buffer Memory	2Mb	2Mb	1Mb	2Mb	1.75Mb	1.75Mb
MAC Table Size	8K	8K	8K	8K	4K	4K
PoE Standard	--	--	--	--	--	--
PoE Budget	--	--	--	--	--	--
Long PoE Transmission	--	--	--	--	--	--
VLAN	--	--	--	--	--	--
Link Aggregation	--	--	--	--	--	--
Flow Control	--	-	Supported	Supported	Supported	Supported
Spanning Tree	--	--	--	--	--	--
Management	--	--	--	--	--	--
Protection	Common Mode 6KV Differential Mode 0.5KV	Common Mode 6KV Differential Mode 0.5KV	Common Mode 4KV Differential Mode 2KV			
Working Temperature	0°C ~ +40°C (32°F ~ +104°F)	0°C ~ +40°C (32°F ~ +104°F)	-40°C ~ +70°C (-40°F ~ +158°F)	-40°C ~ +70°C (-40°F ~ +158°F)	-30°C ~ +65°C (-22°F ~ +149°F)	-30°C ~ +65°C (-22°F ~ +149°F)
Dimensions (WxDxH)	294 x 178 x 44 mm (11.6"x7.0"x1.7")	294 x 178 x 44 mm (11.6"x7.0"x1.7")	150 x 100 x 30 mm (5.9"x3.9"x1.2")	150 x 100 x 42 mm (5.9"x3.9"x1.7")	150 x 110 x 42 mm (5.9"x4.3"x1.7")	150 x 110 x 42 mm (5.9"x4.3"x1.7")

V-Radio Wireless Bridge Series

CPE

Model	PFWB2-60n	PFWB2-30n	PFWB5-30n	PFWB5-10n	PFWB5-30ac
Appearance					
Fast/Gigabit Ethernet	1FE	1FE	1FE	1FE	1GE
Wireless Standard	802.11 b/g/n	802.11 b/g/n	802.11 a/n	802.11 a/n	802.11 a/n/ac
Working Frequency	2.402- 2.492GHz (FCC 2.412- 2.462 GHz)	2.402- 2.492GHz (FCC 2.412- 2.462 GHz)	5.150- 5.850 GHz (FCC 5.150- 5.250 and 5.725- 5.850 GHz)	5.150- 5.850 GHz (FCC 5.150- 5.250 and 5.725- 5.850 GHz)	5.150- 5.850 GHz (FCC 5.150- 5.250 and 5.725- 5.850 GHz)
Wireless Speed	300Mbps	300Mbps	300Mbps	300Mbps	867Mbps
Transmission Distance	0-3km	0-5km	0-3km	0-5km	0-3km
Antenna Gain	9dBi	14dBi	15dBi	20dBi	15dBi
Polarization	Dual Linear: Horizontal 60°, vertical 60°	Dual Linear: Horizontal 34°, vertical 36°	Dual Linear: Horizontal 30°, vertical 30°	Dual Linear: Horizontal 10°, vertical 10°	Dual Linear: Horizontal 30°, vertical 30°
Tx Power Max	31dBm	31dBm	29dBm	29dBm	30dBm
Proprietary Protocol	TDMA	TDMA	TDMA	TDMA	TDMA
Network Security	WPA/WPA2 Personal, WPA/WPA2 Enterprise, WACL, User Isolation	WPA/WPA2 Personal, WPA/WPA2 Enterprise, WACL, User Isolation	WPA/WPA2 Personal, WPA/WPA2 Enterprise, WACL, User Isolation	WPA/WPA2 Personal, WPA/WPA2 Enterprise, WACL, User Isolation	WPA/WPA2 Personal, WPA/WPA2 Enterprise, WACL, User Isolation
Management	Web/WNMS Platform	Web/WNMS Platform	Web/WNMS Platform	Web/WNMS Platform	Web/WNMS Platform
Lightning Protection	Common Mode 3KV Differential Mode 1KV	Common Mode 3KV Differential Mode 1KV	Common Mode 3KV Differential Mode 1KV	Common Mode 3KV Differential Mode 1KV	Common Mode 3KV Differential Mode 1KV
Ingress Protection	IP66	IP66	IP66	IP66	IP66
Working Temperature	-30°C ~ + 70°C (-22°F ~ +158°F)	-30°C ~ + 70°C (-22°F ~ +158°F)	-30°C ~ + 70°C (-22°F ~ +158°F)	-30°C ~ + 70°C (-22°F ~ +158°F)	-30°C ~ + 70°C (-22°F ~ +158°F)
Dimension	145 x 116 x 58 mm (5.7"x4.6"x2.3")	185 x 185 x 81 mm (7.3"x7.3"x3.2")	128 x 97 x 40 mm (5.0"x3.8"x1.6")	185 x 185 x 81 mm (7.3"x7.3"x3.2")	128 x 97 x 40 mm (5.0"x3.8"x1.6")
Power	12- 24 VDC passive PoE	12- 24 VDC passive PoE	12- 24 VDC passive PoE	12- 24 VDC passive PoE	12- 24 VDC passive PoE

TRANSMISSION

V-Radio Wireless Bridge Series


	CPE		Base Station	
Model	PFWB5-10ac	PFWB2-90n	PFWB5-90n	PFWB5-90ac
Appearance				
Fast/Gigabit Ethernet	1GE	1FE	1FE	1GE
Wireless Standard	802.11 a/n/ac	802.11 b/g/n	802.11 a/n	802.11 a/n/ac
Working Frequency	5.150- 5.850 GHz (FCC 5.150- 5.250 and 5.725- 5.850 GHz)	2.402- 2.492GHz (FCC 2.412- 2.462 GHz)	5.150- 5.850 GHz (FCC 5.150- 5.250 and 5.725- 5.850 GHz)	5.150- 5.850 GHz (FCC 5.150- 5.250 and 5.725- 5.850 GHz)
Wireless Speed	867Mbps	300Mbps	300Mbps	867Mbps
Transmission Distance	0-5km	0-5km	0-5km	0-5km
Antenna Gain	20dBi	16dBi	18dBi	18dBi
Polarization	Dual Linear: Horizontal 10°, vertical 10°	Dual Linear: Horizontal 90°, vertical 90°	Dual Linear: Horizontal 90°, vertical 90°	Dual Linear: Horizontal 90°, vertical 90°
Tx Power Max	30dBm	31dBm	29dBm	30dBm
Proprietary Protocol	TDMA	TDMA	TDMA	TDMA
Network Security	WPA/WPA2 Personal, WPA/WPA2 Enterprise, WACL, User Isolation	WPA/WPA2 Personal, WPA/WPA2 Enterprise, WACL, User Isolation	WPA/WPA2 Personal, WPA/WPA2 Enterprise, WACL, User Isolation	WPA/WPA2 Personal, WPA/WPA2 Enterprise, WACL, User Isolation
Management	Web/WNMS Platform	Web/WNMS Platform	Web/WNMS Platform	Web/WNMS Platform
Lightning Protection	Common Mode 3KV Differential Mode 1KV	Common Mode 3KV Differential Mode 1KV	Common Mode 3KV Differential Mode 1KV	Common Mode 3KV Differential Mode 1KV
Ingress Protection	IP66	IP66	IP66	IP66
Working Temperature	-30°C ~ + 70°C (-22°F ~ +158°F)	-30°C ~ + 70°C (-22°F ~ +158°F)	-30°C ~ + 70°C (-22°F ~ +158°F)	-30°C ~ + 70°C (-22°F ~ +158°F)
Dimension	185 x 185 x 81 mm (7.3"x7.3"x3.2")	383 x 100 x 98 mm (15.1"x3.9"x3.9")	383 x 100 x 98 mm (15.1"x3.9"x3.9")	383 x 100 x 98 mm (15.1"x3.9"x3.9")
Power	12- 24 VDC passive PoE	12- 24 VDC passive PoE	12- 24 VDC passive PoE	12- 24 VDC passive PoE

Accessories			
	PoE Midspan		PoE Extender
Model	TAM01GT01GT-75	TAM1GT1GT-30	PFT1300
Appearance			
Fast/Gigabit Ethernet	2GE	2GE	3FE
SFP Slots	--	--	--
Switching Capacity	--	--	1.4Gbps
Packet Forwarding Rate	--	-	0.47Mpps
Packet Buffer Memory	--	--	512Kb
MAC Table Size	--	--	1K
PoE Standard	PoE (802.3af), PoE+ (802.3at), Hi-PoE	PoE(802.3af), PoE+(802.3at)	PoE (802.3af), PoE+ (802.3at)
PoE Budget	75W	30W	-
Lightning Protection		Common Mode 4KV Differential Mode 2KV	Common Mode 4KV Differential Mode 2KV
Working Temperature	-30°C ~ +65°C (-22°F ~ +149°F)	-10°C ~ 55°C (14°F ~ +131°F)	-30°C ~ +60°C (-22°F ~ +140°F)
Dimensions(WxDxH)	210mm x75mm x38.5mm (8.3"x2.9"x1.5")	132.3mm x60mm x33mm (5.2"x2.4"x1.3")	79mm x52mm x23mm (3.1"x2.0"x0.9")

Accessories		
	Ethernet over Coax	
Model	LR1002	LR1002-1ET / LR1002-1EC
Appearance		
Interface	1FE + 1xBNC	1FE + 1xBNC
Transmission Bandwidth	RG59 coaxial cable: 400m/100 Mbps, 1000m/10 Mbps	RG59 coaxial cable: 400m/100Mbps, 1000m/10 Mbps
PoE Standard	(Based on the power input from the ePoE switch)	PoE (802.3af) PoE+ (802.3at)
Lightning Protection	Common Mode 6KV Differential Mode 2KV	Common Mode 4KV Differential Mode 2KV
Working Temperature	-40°C ~ +65°C (-40°F ~ +149°F)	-30°C ~ +65°C (-22°F ~ +149°F)
Dimensions (WxDxH)	56 × 27 × 21 mm (2.2"×1.1"×0.8")	79 × 52 × 23 mm (3.1"×2.0"×0.9")

DISPLAY & CONTROL



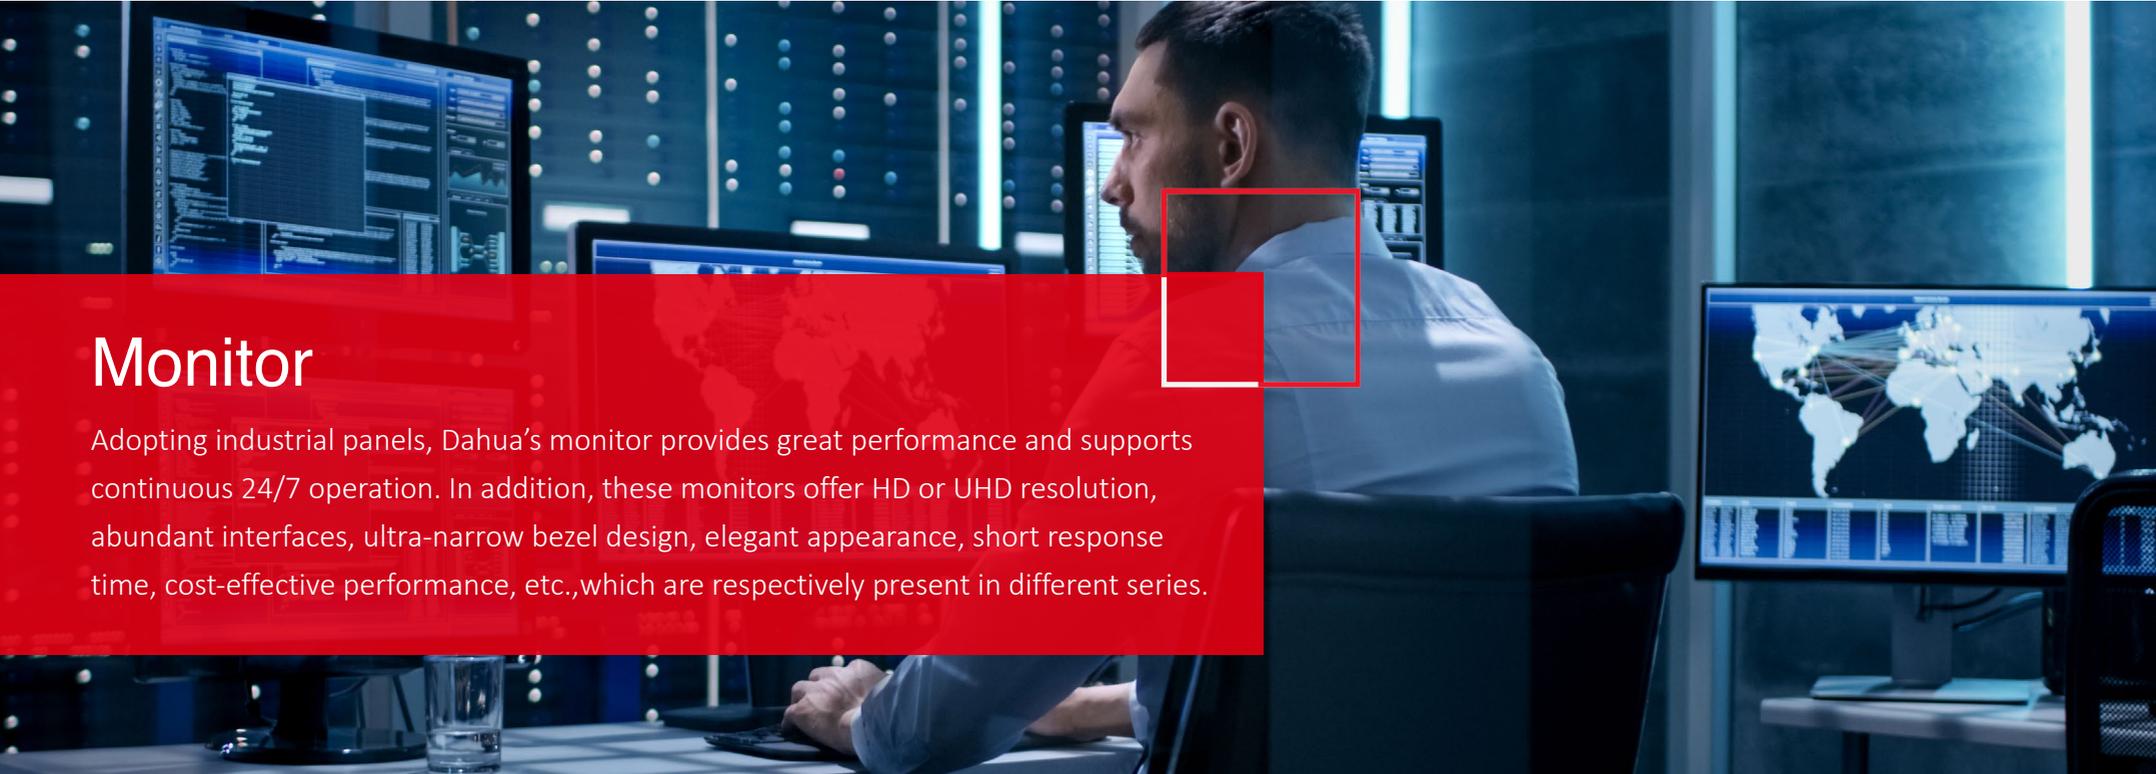

Monitor

Adopting industrial panels, Dahua's monitor provides great performance and supports continuous 24/7 operation. In addition, these monitors offer HD or UHD resolution, abundant interfaces, ultra-narrow bezel design, elegant appearance, short response time, cost-effective performance, etc., which are respectively present in different series.



4K Series

- 3840x2160 Ultra-HD resolution
- 1.07G colors, for a realistic and immersive visual experience



Light Series

- Lightweight
- Cost-effective

DISPLAY & CONTROL


Monitors

Model	LM43-F200	LM32-F200	DHL22-F600-S	LM43-S400	LM27-F410
Appearance					
Screen Size	42.5" (16:9)	31.5" (16:9)	21.5" (16:9)	43" (16:9)	27" (16:9)
Resolution	1920×1080	1920×1080	1920×1080	3840×2160	3840×2160
Brightness	330 cd/m ²	240 cd/m ²	200cd/m ²	450cd/m ²	300cd/m ²
Contrast Ratio	1200:1	1400:1	1000:1	1000:1	1000:1
Viewing Angle	H 178°, V 178°	H 178°, V 178°	H 178°, V 178°	H 178°, V 178°	H 178°, V 178°
Response Time	8ms	8ms	5ms	8ms	14ms
Display Color	8bit	8bit	8bit	10bit	10bit
Input	1 VGA, 1 HDMI, 1 USB	1 VGA, 1 HDMI, 1 USB	1 VGA, 1 HDMI, 1 Audio	1 DP, 2 HDMI, 1 VGA, 1 USB, 1 Audio, 1 RJ45(RS232)	1 DP, 2 HDMI
Output	2 Speaks	2 Speaks	2 Speakers	1 RJ45 (RS232), 2 Speakers	1 Audio, 2 Speakers
Control	Physical Button Remote Cotrol	Physical Button Remote Cotrol	Physical Button	RS232, Infrared Remote	Physical Button
Working Temperature	0°C~+40°C (+32°F~+104°F)	0°C~+40°C (+32°F~+104°F)	0°C~+40°C (+32°F~+104°F)	0°C~+40°C (+32°F~+104°F)	0°C~40°C (+32°F~+104°F)
Working Humidity	20%~85%	20%~85%	10%~85%	10%~85%	10%~85%
Power & Consumption	AC100~240V, 75W	AC100~240V, 55W	AC110~240V, 25W	AC110~240V, 70W	DC 12V
Bezel Width	12.8mm (U/R/L), 22mm (B)	13.9mm (U/R/L), 20.5mm (B)	13.5mm (U/R/L), 19mm (B)	8mm (U/L/R/B)	11.5mm(U/R/L), 17.5mm(B)
VESA	400x200mm	75×75mm	75×75mm	400×400mm	75×75mm
Dimensions	969.1×566.8×82.4mm (38.2"×22.3"×3.2")	731.4×432.6×67.5mm (28.8"×17"×2.7")	502.8×299.8×47.6mm (19.8"×11.5"×1.9")	960.7×550.7×65.0mm (37.8"×21.7"×2.6")	622.9×367.3×48mm (24.5"×14.5"×1.9")
Weight	7.4kg (16.3lb)	3.9kg (8.6lb)	3.2kg(7.1lb)	16.6kg(36.6lb)	5kg (11.0lb)

LCD Video Wall

Provides excellent visual experience with a variety of options for panel size, bezel width, resolution and brightness.

- 24/7
- 3.5mm narrow bezel
- Abundant interfaces with daisy chain function
- Fast response time and no image ghosting
- Fast stacking installation

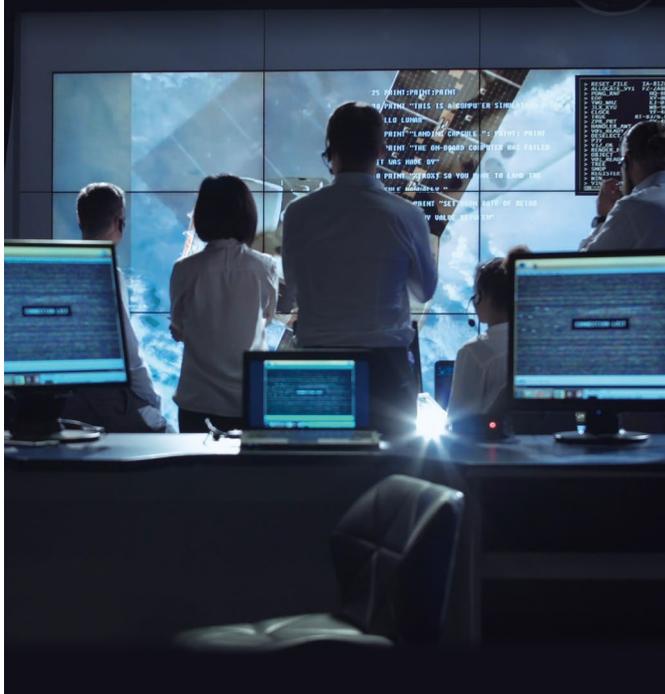

LCD Video Wall

Model	LS550UCM-EF	LS490UCM-EF	LS460UCM-EF
Appearance			
Screen Size	55"(16:9)	49"(16:9)	46"(16:9)
LCD Technology	ADS	ADS	ADS
Resolution	1920x1080	1920x1080	1920x1080
Backlight	Direct LED	Direct LED	Direct LED
Bezel Width	2.3mm(U/L), 1.2mm(R/B)	2.3mm(U/L), 1.2mm(R/B)	2.3mm(U/L), 1.2mm(R/B)
Pixel Density	40dpi	46dpi	48dpi
Brightness	500cd/m ²	500cd/m ²	500cd/m ²
Contrast Ratio	1400:1	1400:1	1200:1
Viewing Angle	H 178°, V 178°	H 178°, V 178°	H 178°, V 178°
Response Time	8ms	8ms	8ms
Display Color	8bit	8bit	8bit
Color Temperature	10,000K	10,000K	10,000K
MTBF	50,000h	50,000h	50,000h
Input	1 CVBS, 1 VGA, 1 DVI-D, 1 HDMI, 1 RS232, 2 USB, 1 Audio in, 1 IR	1 CVBS, 1 VGA, 1 DVI-D, 1 HDMI, 1 RS232, 2 USB, 1 Audio in, 1 IR	1 CVBS, 1 VGA, 1 DVI-D, 1 HDMI, 1 RS232, 2 USB, 1 Audio in, 1 IR
Output	1 CVBS, 1 RS232, 2 HDMI, 1 VGA, 1 Audio out	1 CVBS, 1 RS232, 2 HDMI, 1 VGA, 1 Audio out	1 CVBS, 1 RS232, 2 HDMI, 1 VGA, 1 Audio out
Control	RS232, Infrared Remote	RS232, Infrared Remote	RS232, Infrared Remote
Working Temperature	0°C~+50°C (+32°F~+122°F)	0~+50°C (+32°F~+122°F)	0°C~+50°C (+32°F~+122°F)
Working Humidity	10%~80%	10%~80%	10%~80%
Power & Consumption	AC100~240V, 150W	AC100~240V, 120W	AC100~240V, 110W
Dimensions	1213.7×684.5×106.5mm (47.8"×26.9"×4.2")	1078.4×608.4×106.6mm (42.5"×24.0"×4.2")	1022.0×576.6×107.3mm (40.2"×22.7"×4.2")
Installation	Floor-standing, Wall-mounted(Optional)	Floor-standing, Wall-mounted(Optional)	Floor-standing, Wall-mounted(Optional)

Decoder

Supports 4K/8K signal decoding and 4K output to ensure an ultra-high definition viewing experience using monitors or video walls.

- Local signal collection
- Flexible image display
- Powerful collection and decoding capability
- Excellent compatibility with devices from top brands



DISPLAY & CONTROL


Decoder

Model	NVD0905DH-4I-4K	NVD0405DH-2I-4K	NVD0105DH-4K
Appearance			
Screen Quantity	9 Screens	4 Screens	1 Screen
Splicing Control Modes	Zoom/Merge/Roam/Overlay	Zoom/Merge/Roam/Overlay	Zoom/Roam/Overlay
Split Mode	1/4/9/16	1/4/9/16/25/36	1/4/9/16/25/36/64
Max Decoding	9CH@12MP(25fps)/12CH@4K 48CH@1080P/108CH@720P/144CH@D1	2CH@8K/8CH@4K/36CH@1080P 80CH@720P/144CH@D1	3CH@12MP(25fps)/4CH@4K/ 16CH@1080P/36CH@720P/64CH@D1
Local Video Input	2CH HDMI, 2CH DVI-I	2CH HDMI	—
Network Video Input	IPC/DVR/NVR, etc.	IPC/DVR/NVR, etc.	IPC/DVR/NVR, etc.
Video Output	HDMI(DVI with convertor)	HDMI/BNC	HDMI/VGA
Audio Out	HDMI	4HDMI, 2 BNC (Vp-p 1V, 75Ω)	HDMI
Alarm In/Out	4/4, (30VDC 1A, 125VAC 0.5A, Relay output)	8/8, (30VDC 1A, 125VAC 0.5A, Relay output)	4/4, (30VDC 1A, 125VAC 0.5A, Relay output)
Intercom	1 Pair 3.5mm Jack	1 Pair 3.5mm jack	1 Pair RCA
Processor	Intel x86 processor	Quad-core embedded processor	Intel x86 processor
Case	1.5U 19"	1U 19"	1U 19"
Ethernet	2 RJ-45 port, (10/100/1000M)	1 RJ-45 port, (10/100/1000M)	1 RJ-45 port,(10/100/1000M)
USB	1 USB2.0, 1 USB3.0	2 USB2.0	2 USB2.0
Power	AC100~240V, 50Hz~60Hz	DC12V/5A	DC12V/3.3A
Control Modes	WEB/Video Platform/Network keyboard/ iPad	WEB/Local GUI/Video Platform/ Network keyboard/iPad	WEB/Local GUI/Video Platform/Network keyboard/iPad
Highlights	4K & H.265 & H.265+ decoding, Fisheye dewarp, PC signal collection	8K & H.265 & H.265+ decoding, Fisheye dewarp, PC signal collection	4K & H.265 & H.265+ decoding, Fisheye dewarp, Supports the display of intelligent regular line

Keyboard

A network keyboard is a control device with joystick that can conveniently control PTZ operation, video wall, etc.

- Powerful control capability
- Easy connection
- Flexible joystick
- Multiple combination key

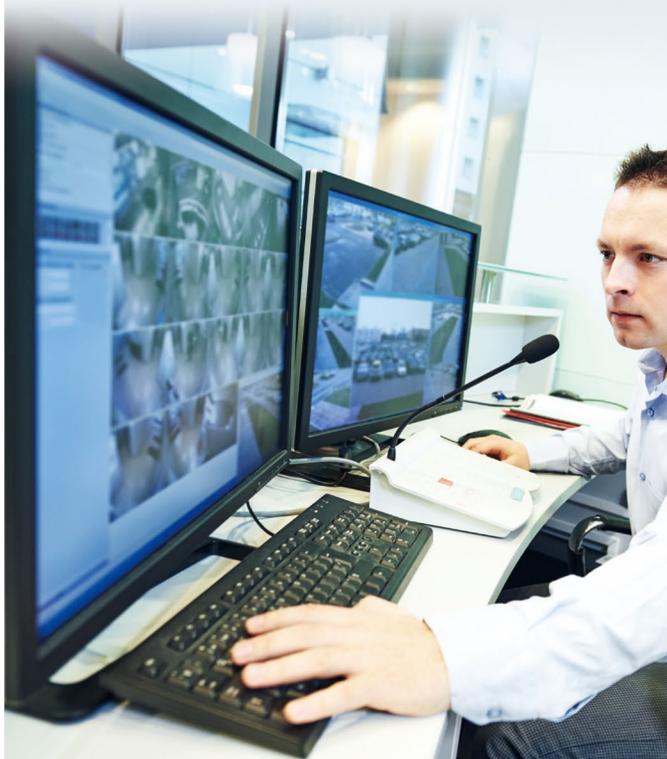

Keyboard

Model	NKB1000
Appearance	
Control Mode(s)	Direct mode, Network mode, USB mode
Control Interface	1 RJ-45 port (10/100/1000M), RS232, RS485, RS422, USB
DVR/NVR Protocol	DH2
Dome Protocol	DH-SD1/PELCO-D/PELCO-P, etc.
Max. Users	64 (including "admin")
Screen	Monochrome LCD screen (128x64)
Local Split Display Mode	—
Video Output	—
Local Decoding	—
Intercom	—
Joystick	3-axis (zoom, focus, iris)
Main Processor	Industrial embedded microprocessor
Operating System	Embedded LINUX
USB	1 USB2.0
Power	DC12V/2A
Highlights	Multi-user access control; Controls DVR, NVR, EVS, Decoder, Matrix; Works with SmartPSS or DSSClient via USB port

ACCESSORIES



Accessories

Accessory products offer a series of supporting equipment for CCTV monitoring devices promoted by Dahua to enhance product integrity and user experience, and supplement the insufficiencies of traditional products and solutions.



Camera Mount

Provides a series of solutions for the installation of cameras.



Power Supply

Provides different power supply type for devices with different specifications.



Audio

Collects live sound signals for the camera.



Cabling

Provides different cable products to meet the transmission requirements of different equipment.

ACCESSORIES

HFWxxT Series			HFWxxS,HFWXXE-AS/SA Series			HFWxxM Series				
										
Model	PFA130-E	PFA130-E+PFA152-E	Model	PFA134	PFA134+PFA152-E	Model	PFB110W	PFB110C-E	PFB121W	
Mount	Junction box	Pole mount	Mount	Junction box	Pole mount	Mount	Ceiling mount	Ceiling mount (extensible)	Wall mount	

HDBWxxR Series							
							
Model	PFA137	PFB203W	PFB203W+PFA152-E	PFA106+PFB220C	PFB200C	PFA137+PFA200W	
Mount	Junction box	Wall mount	Pole mount	Ceiling mount (extensible)	In-ceiling mount	Rain shade	

HFWxxE-Z, HFWxxE(-SE), TPC-BF2xx-T Series			HDBWxxE-S, HDBWxxE-AE Series						
									
Model	PFA121	PFA121+PFA152-E	Model	PFA136	PFB203W	PFB203W+PFA152-E	PFA136+PFA200W		
Mount	Junction box	Pole mount	Mount	Junction box	Wall mount	Pole mount	Rain shade		

HDBWxxF Series				HDWxxT-AS/ZAS, TPC-DF1xx Series					
									
Model	PFA139	PFB204W	PFB204W+PFA152-E	Model	PFA137	PFB203W	PFB203W+PFA152-E	PFA106+PFB220C	
Mount	Junction box	Wall mount	Pole mount	Mount	Junction box	Wall mount	Pole mount	Ceiling mount	

ACCESSORIES

HDW2/3xxTM Series				
				
Model	PFA130-E	PFB203W	PFB203W+PFA152-E	PFA106+PFB220C
Mount	Junction box	Wall mount	Pole mount	Ceiling mount (extensible)

SD6CE/5A/49xx Series								
								
Model	PFB305W	PFB310W	PFB305W+PFA120	PFA111+PFB300C	PFA150	PFA151	PFA140	PFA111+PFB303S
Mount	Wall mount		Junction box	Ceiling mount	Pole mount	Corner mount	Power box	Parapet mount

SD60/TPC-SD8xx Series								
								
Model	PFA111+PFB303W	PFB310W	PFA111+PFB303W+PFA120	PFA111+PFB300C	PFA150	PFA151	PFA140	PFA111+PFB303S
Mount	Wall mount		Junction box	Ceiling mount	Pole mount	Corner mount	Power box	Parapet mount

SD59/50/40xx Series							
							
Model	PFA110+PFB300S	PFA110+PFB300S+PFA120	PFA110+PFB300C	PFA150	PFA151	PFA140	PFA110+PFB303S
Mount	Wall mount	Junction box	Ceiling mount	Pole mount	Corner mount	Power box	Parapet mount

ACCESSORIES

SD42xx Series				
				
Model	PFA102+PFB302S	PFA102+PFB302S+PFA150	PFA102+PFB302S+PFA151	PFA102+PFB300C
Mount	Wall mount	Pole mount	Corner mount	Ceiling mount

SD29xx Series				
 <small>reddot award 2015 winner</small>				
Model	PFA103+PFB302S	PFA103+PFB302S+PFA150	PFA103+PFB302S+PFA151	PFA103+PFB300C
Mount	Wall mount	Pole mount	Corner mount	Ceiling mount

SD22xx Series					SD1A/12 Series			
								
Model	PFA137	PFB203W	PFB203W+PFA152-E	PFB200C	Model	PFA13F	PFA107+PFB305W	PFA107+PFB220C
Mount	Junction box	Wall mount	Pole mount	In-ceiling mount	Mount	Junction box	Wall mount	Ceiling mount (extensible)

TPC-SD2xx Series								
								
Model	PFA111+PFB303W	PFB305W	PFA111+PFB303W+PFA120	PFA111+PFB300C	PFA150	PFA151	PFA140	PFA111+PFB303S
Mount	Wall mount	Wall mount	Junction box	Ceiling mount	Pole mount	Corner mount	Power box	Parapet mount

Housings

Provides a multi-functional shield for the box camera.

- Aesthetic design
- All weather protection, suitable for different scenes
- IP66/67, IK10 ingress protection
- Supports remote RS485 control of IR lights and wiper function



Housings

Model	PFH610N-IR-W	PFH610V	PFH610V-H	PFH610V-H-POE
Appearance				
Inside Dimension	255mmx90mmx70.5mm (10.04"x3.54"x2.78") 215mmx90mmx83mm (8.46"x3.54"x3.27")	255x90x83mm (10.04"x3.54"x3.27")	255x90x70.5mm (10.04"x3.54"x2.78") 215x90x83mm (8.46"x3.54"x3.27")	255x90x70.5mm (10.04"x3.54"x2.78") 215x90x83mm (8.46"x3.54"x3.27")
Window Dimension	φ60mm (φ2.36")	φ60mm (φ2.36")	φ60mm (φ2.36")	φ60mm (φ2.36")
Wiper	Supported	--	--	--
Vandal-proof	--	Supported	Supported	Supported
Anti-corrosion	--	--	--	--
Compatibility	HFxxE, HFxxF	HFxxE, HFxxF	HFxxE, HFxxF	HFxxE, HFxxF
IR Distance	0~100m (0~328.08ft)	--	--	--
RS485 Control	Use RS485 to control IR light & wiper	--	--	--
Power Supply	AC24V/5A	DC12V, AC24V	AC24V/3A	POE+
Power Consumption	Max. 70W	--	30W	12W
Operating Temperature	Set: -40°C~+60°C (-40°F~+140°F) Heater: ON: 5±5 °C/OFF: 15±5 °C Cooler: ON: 37±5°C/OFF: 20±5°C ON: 5±5 °C/OFF: 15±5°C	Set: -30°C ~+60°C (-22°F~+140°F) Heater: N/A Cooler: N/A	Set: -40°C ~+60°C (-40°F~+140°F) Heater: ON: 5±5 °C /OFF: 15±5 °C Cooler: ON: 37±5 °C /OFF: 20±5 °C ON: 5±5 °C/OFF: 15±5 °C	Set: -40°C ~+60°C (-40°F~+140°F) Heater: ON: 5±5 °C /OFF: 15±5 °C Cooler: ON: 37±5 °C /OFF: 20±5 °C ON: 5±5 °C /OFF: 15±5 °C
Ingress Protection	IP66	IP67	IP67	IP67
Vandal Resistance	--	IK10	IK10	IK10
Material	Aluminum (case) &PC (others)	Aluminum (case) &PC (others)	Aluminum (case) &PC (others)	Aluminum (case) &PC (others)
Dimension (LxWxH)	404mmx164mmx175mm (15.91"x6.46"x6.89")	404mmx164mmx132mm (15.91"x6.46"x5.2")	404mmx164mmx132mm (15.91"x6.46"x5.2")	404mmx164mmx132mm (15.91"x6.46"x5.2")
Certification	CE, FCC, ICES	CE, FCC, ICES	CE, FCC, UL, EAC, ICES	CE, FCC

ACCESSORIES

Housings

Model	PFH610V-IR	PFH610V-IR-POE	PFH610A	PFH610A-H	PFH610A-H-POE	PFH610A-IR	PFH610A-IR-POE
Appearance							
Inside Dimension	255x90x70.5mm (10.04"x3.54"x2.78") 215x90x83mm (8.46"x3.54"x3.27")	255x90x70.5mm (10.04"x3.54"x2.78") 215x90x83mm (8.46"x3.54"x3.27")	255x90x83mm (10.04"x3.54"x3.27")	255x90x70.5mm (10.04"x3.54"x2.78") 215x90x83mm (8.46"x3.54"x3.27")	255x90x70.5mm (10.04"x3.54"x2.78") 215x90x83mm (8.46"x3.54"x3.27")	255x90x70.5mm (10.04"x3.54"x2.78") 215x90x83mm (8.46"x3.54"x3.27")	255x90x70.5mm (10.04"x3.54"x2.78") 215x90x83mm (8.46"x3.54"x3.27")
Window Dimension	φ60mm (φ2.36")	φ60mm (φ2.36")	φ60mm (φ2.36")	φ60mm (φ2.36")	φ60mm (φ2.36")	φ60mm (φ2.36")	φ60mm (φ2.36")
Wiper	--	--	--	--	--	--	--
Vandal-proof	Supported	Supported	--	--	--	--	--
Anti-corrosion	--	--	Supported	Supported	Supported	Supported	Supported
Compatibility	HFxxE, HFxxF	HFxxE, HFxxF	HFxxE, HFxxF	HFxxE, HFxxF	HFxxE, HFxxF	HFxxE, HFxxF	HFxxE, HFxxF
IR Distance	0~100m (0~328.08ft)	0~100m (0~328.08ft)	--	--	--	0~100m(0~328.08ft)	0~100m(0~328.08ft)
RS485 Control	Use RS484 to control IR light	Use RS484 to control IR light	--	--	--	--	--
Power Supply	AC24V/5A	POE+	DC12V, AC24V	AC24V/3A	POE+	AC24V/5A,	POE+
Power Consumption	55W	12.5W	N/A	30W	12W	55W	12.5W
Operating Temperature	Set: -40°C ~+60°C (-40°F~+140°F) Heater: ON: 5±5°C /OFF: 15±5°C Cooler: ON: 37±5°C /OFF: 20±5°C ON: 5±5°C /OFF: 15±5°C	Set: -40°C ~+60°C (-40°F~+140°F) Heater: ON: <+5°C(+41°C) OFF: ≥+5°C(+41°C) Cooler: ON: ≥37°C(98.6°C)/ OFF: <20°C(68°C)	Set: -30°C ~+60°C (-22°F~+140°F) Heater: ON: N/A Cooler: ON: N/A	Set: -40°C ~+60°C (-40°F~+140°F) Heater: ON: ON: 5±5°C /OFF: 15±5°C Cooler: ON: 37±5°C /OFF: 20±5°C ON: 5±5°C /OFF: 15±5°C	Set: -40°C ~+60°C (-40°F~+140°F) Heater: ON:5±5°C /OFF: 15±5°C Cooler: ON: 37±5°C /OFF: 20±5°C ON: 5±5°C /OFF: 15±5°C	Set: -40°C ~+60°C (-40°F~+140°F) Heater: ON: 5±5°C /OFF: 15±5°C Cooler: ON: 37±5°C /OFF: 20±5°C ON: 5±5°C /OFF: 15±5°C	Set: -40°C ~+60°C (-40°F~+140°F) Heater: ON: <+5°C (+41°C) OFF: +5°C (+41°C) Cooler: ON: ≥37°C (98.6°C) OFF: <20°C (68°C)
Ingress Protection	IP67	IP67	IP67	IP67	IP67	IP67	IP67
Vandal Resistance	IK10	IK10	IK10	IK10	IK10	IK10	IK10
Material	Aluminum (case) &PC (others)	Aluminum (case) &PC (others)	Aluminum (case) &PC (others)	Aluminum (case) &PC (others)	Aluminum (case) &PC (others)	Aluminum (case) &PC (others)	Aluminum (case) &PC (others)
Dimension (LxWxH)	404mmx164mmx132mm (15.91"x6.46"x5.2")	404mmx164mmx132mm (15.91"x6.46"x5.2")	404mmx164mmx132mm (15.91"x6.46"x5.2")	404mmx164mmx132mm (15.91"x6.46"x5.2")	404mmx164mmx132mm (15.91"x6.46"x5.2")	404mmx164mmx132mm (15.91"x6.46"x5.2")	404mmx164mmx132mm (15.91"x6.46"x5.2")
Certification	CE, FCC, UL, EAC, ICES	CE, FCC, ICES	CE, FCC, ICES	CE, FCC, UL, EAC, ICES	CE, FCC	CE, FCC, UL, EAC, ICEzS	CE, FCC, ICES

Lens

A wide range of multi-functional lenses for the box camera.

- Super edge resolution
- Great highlight performance
- Outstanding starlight technology
- Better temperature performance



Lens					
Model	PFL2712-E6D	PFL0550-E6D	PLZ20C0-D	PLZ21C0-D	PFL1575-A12D
Appearance					
Image Format	1/2.7"	1/2.7"	1/1.7"	1/1.7"	1/1.7"
Focal Length	2.7-12mm	5-50mm	3.7-16mm	10.5-42mm	15-75mm
Lens Pixel	6MP	6MP	12MP	12MP	12MP
Aperture	F1.6	F1.6	F1.5	F1.5	F1.5
Mount	CS	CS	CS	CS	C
Focus Control	Manual	Manual	Manual	Manual	Manual
Zoom Control	Manual	Manual	Manual	Manual	Manual
Iris Control	DC-iris	DC-iris	DC-iris	DC-iris	DC-iris
IR Correction	Supported(420~850nm)	Supported	Supported	Supported	Supported
M.O.D.	0.3m (0.98ft)	0.5m (1.64ft)	0.5m (1.64ft)	0.3m (0.98ft)	1.5m (4.92ft)
Operating Temperature	-30°C~+70°C (-22°F~+158°F)	-30°C~+70°C (-22°F~+158°F)	-30°C~+70°C (-22°F~+158°F)	-30°C~+70°C (-22°F~+158°F)	-30°C~+70°C (-22°F~+158°F)

Lens					
Model	PLZ20C0-P	PLZ21C0-P	PFL2070-J12M	PFL1040-K9PE	PFL1040-K9M
Appearance					
Image Format	1/1.7"	1/1.7"	4/3"	1"	1"
Focal Length	3.7-16mm	10.5-42mm	20-70mm	10-40mm	10-40mm
Lens Pixel	12MP	12MP	12MP	9MP	9MP
Aperture	F1.5	F1.5	F1.5	F1.5	F1.5
Mount	CS	CS	M43	C	C
Focus Control	Manual	Manual	Manual	Motorized	Manual
Zoom Control	Manual	Manual	Manual	Motorized	Manual
Iris Control	P-iris	P-iris	Manual	P-Iris	Manual
IR Correction	Supported	Supported	--	--	--
M.O.D.	0.5m (1.64ft)	0.3m (0.98ft)	3m (9.84ft)	2.5m (8.2ft)	2.5m (8.2ft)
Operating Temperature	-30°C~+70°C (-22°F~+158°F)	-30°C~+70°C (-22°F~+158°F)	-30°C~+70°C (-22°F~+158°F)	-30°C~+70°C (-22°F~+158°F)	-30°C~+70°C (-22°F~+158°F)

Power Supply

Safe and reliable power supply for our products.

- DC power adapter: Wide temperature operation from -30°C~+70°C and lightning protection up to 4KV
- Distributed Power: wall mount, convenient for powering multiple devices
- Switch power: High quality and reliability, widely used, flexible
- UPS: Temporary power discharge equipment between utility and equipment

ACCESSORIES

DC Power Adapter

Model	PFM321D-EN/BS/US	PFM320D-EN/BS/US	PFM321-EN/BS/US	PFM320D-015	PFM300
Appearance					
Input	100~240V, 50/60Hz, 0.5A	100~240V, 50/60Hz, 0.6A	90~264V	AC100~240V, 50/60Hz, 0.6A	AC180~264V, 50/60Hz, 0.6A
Output	12V(+7%, -3%), 1A	12V(+7%, -3%), 2A	12V(+7%, -3%), 1A	DC12V (+7%, -3%), 1.5A	DC12V (±5%), 2A
Working Temperature	-30°C~+70°C (-22°F~+158°F)	-30°C~+70°C (-22°F~+158°F)	-10°C~+55°C (+14°F~+131°F)	-30°C~+70°C (-22°F~+158°F)	-30°C~+70°C (-22°F~+158°F)
Surge Protection	Common Mode ±4KV (12 ohms) Differential Mode ±2kV (2 ohms)				

Distributed Power Box

Model	PFM340-5CH	PFM341-9CH	PFM342-9CH	PFM343-19CH
Appearance				
Input	AC90~264V	AC90~264V	AC90~264V	AC90~264V
Output	5 x 12VDC (-3%~+7%), 4A	9 x 12VDC (-3%~+7%), 5A	9 x 12VDC (-3%~+7%), 10A	19 x 12VDC (-3%~+7%), 20A
Working Temperature	-20°C~+45°C (-4°F~+113°F)	-20°C~+45°C (-4°F~+113°F)	-20°C~+45°C (-4°F~+113°F)	-20°C~+45°C (-4°F~+113°F)
Surge Protection	Line to ground: 4000V Line to line: 2000V			

Switching Power&UPS

Model	PFM320S-150	PFM320S-50	PFM350-360	PFM350-900	PFM351-900
Appearance					
Input	88~132Vac/176~264Vac	90~264Vac	600VA/360W	1500VA/900W	1000VA/900W
Output	12Vdc, 12.5A	12Vdc, 4.2A	220Vac~240Vac (US 110Vac~120Vac)	220Vac~240Vac (US 110Vac~120Vac)	220Vac~240Vac (US 110Vac~120Vac)
Working Temperature	20°C~+50°C (60% output at +70°C)	-20°C ~+50°C (60% output at +70°C)	50Hz or 60Hz	50Hz or 60Hz	40Hz~70Hz
Surge Protection	Line to ground: ±2000V Line to line: ±1000V	Line to ground: ±2000V Line to line: ±1000V	220/230/240 VAC (US 110/120 VAC)	220/230/240 VAC (US 110/120 VAC)	200/208/220/230/240 VAC (US 100/110/115/120/127 VAC)
Output Rated Frequency	--	--	50Hz or 60Hz ±1Hz	50Hz or 60Hz ±1Hz	50Hz or 60Hz
Operating Temperature	--	--	0°C ~ +40°C (+32°F ~ +104°F)	0°C ~ +40°C (+32°F ~ +104°F)	0°C ~ +40°C (+32°F ~ +104°F)

Pickups

Choose from a variety of pickup products to effectively capture live sounds.

- High-sensitivity microphone
- Intelligent noise reduction
- Smart audio crack protection
- Wide dynamic range processing technology
- Automatic supplement function



Pickups

Model	HAP100	HAP201	HAP301	HAP120
Appearance				
Scope	5-40m ²	1-150m ²	1-150m ²	10-70m ²
Sensitivity	-40dB	-38 dB	-38 dB	-34dB
Frequency response	20Hz~20kHz	20 Hz~20 kHz	20 Hz~20 kHz	80Hz~16kHz
Directional characteristic	Omni-directional	Omni-directional	Omni-directional	Omni-directional
SNR	70dB	85 dB	85 dB	58dB
Dynamic range	104dB	106 dB	106 dB	74dB
Max. sustainable sound pressure	120dB SPL(1kHz, THD 1%)	120 dB SPL (1 kHz,THD 1%)	120 dB SPL (1 kHz,THD 1%)	110dB SPL (1kHz, THD 1%)
Output impedance	600Ω (non-equilibrium)	25 Ω non-balanced	25 Ω non-balanced	600Ω (non-equilibrium)
Output signal amplitude	2.5Vpp/-25dB	2.5 VPP/-25 dB	2.5 VPP/-25 Db	2.5Vpp/88dB SPL
M.O.D.	0.3m (0.98ft)	0.5m (1.64ft)	0.5m (1.64ft)	0.3m (0.98ft)
Working temperature	-30°C ~ +70°C (-22°F ~+158°F)	-20 °C ~ +60 °C (-4 °F ~+140 °F)	-20°C ~ +60°C (-4 °F ~+140 °F)	-30°C ~+70°C (-22°F ~+158°F)

Pickups

Model	HAP320	HAP120-V	HAP320-V
Appearance			
Scope	10-150m ²	5m	5-100m ²
Sensitivity	-35dB	-43dB	-24dB
Frequency response	20Hz~20kHz	20Hz~20kHz	20Hz~20kHz
Directional characteristic	Omni-directional	Omni-directional	Omni-directional
SNR	65dB	58dB	68dB
Dynamic range	86dB	74dB	84dB
Max. sustainable sound pressure	115dB SPL (1kHz, THD 1%)	110dB SPL (1kHz, THD1%)	110dB SPL (1kHz, THD 1%)
Output impedance	100Ω (non-equilibrium)	100Ω (non-equilibrium)	100Ω (non-equilibrium)
Output signal amplitude	2.5Vpp/92dB SPL	2.5Vpp/101dB SPL	2.5Vpp/90dB SPL
M.O.D.	0.3m (0.98ft)	0.5m (1.64ft)	0.5m (1.64ft)
Working temperature	0°C~+50°C (32°F~+122°F)	-30°C~+70°C (-22°F~+158°F)	-30°C~+70°C (-22°F~+158°F)

Camera Testers

It allows easier testing of cameras that only requires a single person to operate, saving significant amount of time and labor costs.

- Camera video testers
- Small tools: DMM / Wifi test / OPM / Data monitor
- Cable tester: TDR / Analog video generator
- Power supply: PoE+ / DC12V2A / USB5V2A output



ACCESSORIES

Camera Testers

Model	PFM900-E	PFM906	PFM907
Appearance			
Operation System	Linux	Android	Linux
Language	Multi-language interface	Multi-language interface	Multi-language interface
Operation Mode	Keyboard	Touch screen and keyboard	Touch screen and keyboard
Screen	4.0" TFT screen, 800 x 480 resolution	7 inch capacitive touch screen display, 1920x1200 resolution	7 inch capacitive touch screen display, 1920x1200 resolution
Update	Online and local update	Online and local update	Online and local update
Analog Video Test	HDCVI: 2MP, 4MP, 5MP, 6MP, 4K HDTVI: 2MP, 4MP, 5MP AHD: 2MP, 4MP CVBS: NTSC, PAL	HDCVI: 1MP, 2MP, 4MP, 4K HDTVI: 1MP, 2MP, 4MP, 5MP AHD: 1MP, 2MP, 4MP CVBS: NTSC, PAL	HDCVI: 1MP, 2MP, 4MP, 5MP, 6MP, 4K HDTVI: 1MP, 2MP, 4MP, 5MP AHD: 1MP, 2MP, 4MP CVBS: NTSC, PAL
IPC Test	Discovering the device, real-time video, camera configuration, PTZ test, discovering ONFIV device	Discovering the device, real-time video, camera configuration, PTZ test, discovering ONFIV device	Discovering the device, real-time video, camera configuration, PTZ test, discovering ONFIV device
Camera Power Supply	DC12V/2A output	DC48V PoE+ power out, Max. DC12V 2A out, Max. DC5V 2A out	DC12V/2A output
RS485	Receive and display protocol data with a RS485 cable	Captures and analyzes the command data from controlling device via RS485	Captures and analyzes the command data from controlling device via RS485
PTZ Control test	OSD menu display and PTZ control	OSD menu display and PTZ control	OSD menu display and PTZ control
Accessibility	Audio Test, TDR Test, Digital Multimeter, POE Test	Audio Test, TDR Test, Digital Multimeter, Optical Power Meter, HDMI Output, POE Test	Audio Test, TDR Test, Digital Multimeter, Optical Power Meter, HDMI Output, POE Test, WiFi Test
Charger	PoE 48V/0.32A	DC 12V/2A	DC 12V/1.5A
Working Temperature	-10°C~+55°C (+14°F~+131°F)	-10°C~+55°C (+14°F~+131°F)	-10°C~+55°C (+14°F~+131°F)

Video Extension

Allows video signal extension and branching.

- Real-time transmission of HDMI signals
- Real-time transmission of VGA signal
- No need to install drivers
- Excellent anti-thunder, anti-static and anti-interference capabilities



Video Extension

Model	PFM700-E	PFM700-4K
Appearance		
Transmission Signal	1channel HDMI	1channel HDMI
Transmission Distance	50m	80m(4K: 40m)
Video Signal Input Interface	HDMI interface	HDMI interface
Video Input Port	HDMI interface	HDMI interface
Transmission Port	RJ45 port	RJ45 port
Resolution	1080P/1080I/720P/576P/576I/480P/480I	4K/1080P/1080I/720P/576P/576I/480P/480I
Working Temperature	-10°C~55°C (14°F~131°F)	-10°C~55°C (14°F~131°F)

Video Extension

Model	PFM701-4K	PFM710
Appearance		
Transmission Signal	1channel HDMI ~ 2 channel HDMI	1channel VGA
Transmission Distance	--	35m
Video Signal Input Interface	HDMI interface	Female 15, VGA port
Video Input Port	HDMI interface	Female 15, VGA port
Transmission Port	--	RJ45 port
Resolution	4K/1080P/1080I/720P/576P/576I/480P/480I	640*480/800*600/1600*1050/1600*1200/1920*1200/1920*1080
Working Temperature	-10°C~55°C (14°F~131°F)	0°C~+55°C (+32°F~+131°F)

Cables

New network cables with higher quality and higher cost-performance ratio.

- 305m/carton UTP CAT5e, Power over Ethernet compatible with one cable
- High-purity and oxygen-free copper conductor material
- Customized PVC sheath, CE CPR Eca or ANSI UL CM flame retardant class certified
- Top-notch quality commitment for 10 years



ACCESSORIES

Cables

Model	PFM920I-5EUN	PFM920I-6UN-C	PFM922I-6UN-C	PFM923I-6UN-C
Appearance				
Category	CAT5e	CAT6	CAT6	CAT6
Conductor Material	Oxygen free copper (99.97% purity)	Oxygen free copper (99.97% purity)	CCA(Copper content 8%~12%)	Oxygen free copper (99.97% purity)
Conductor Diameter	0.45 mm ± 0.01 mm	0.53 mm ± 0.005 mm	0.57 mm ± 0.01 mm, 23AWG	0.53 mm ± 0.005 mm
Sheath	PVC	PVC	PVC	LSZH
Certification	CPR Eca	CPR Eca	CPR Eca	CPR Eca
Length	305m (1000ft)	305m (1000ft)	305m (1000ft)	305m (1000ft)
Color	White	White, Orange, Blue	Orange	White

Cables

Model	PFM920I-5EU-U	PFM920I-6U-U	PFM920I-6U-C
Appearance			
Category	CAT5e	CAT6	CAT6
Conductor Material	Oxygen free copper (99.97% purity)	Oxygen free copper (99.97% purity)	Oxygen free copper (99.97% purity)
Conductor Diameter	0.5 mm ± 0.01 mm, 24AWG	0.57 mm ± 0.01 mm, 23AWG	0.57 mm ± 0.01 mm, 23AWG
Sheath	PVC	PVC	PVC
Certification	UL CM	UL CM	CPR Eca
Length	305m (1000ft)	305m (1000ft)	305m (1000ft)
Color	White	White	White

Cabinets

Cabinets provide protection and stable working environment for storage devices. It also serves as shield against electromagnetic interference.

- Aesthetic design
- Standard 19" rack
- Supports wall mount and plane mount
- Cable entry on the top cover and bottom panel
- The four sides (around) the cabinet can be opened



Cabinets

Model	PFC200D-6U4D	PFC200D-9U4D	PFC200D-12U4D	PFC200D-18U6D
Appearance				
Material	SPCC	SPCC	SPCC	SPCC
Dimension (WxDxH)	600mmx450mmx372mm (23.62"x17.72"x14.57")	600mmx450mmx505mm (23.62"x17.72"x19.88")	600mmx450mmx638mm (23.62"x17.72"x25.12")	600mmx600mmx990mm (23.62"x23.62"x38.98")
Weight	13kg(28.66lb)	15.6kg(34.39lb)	18.1kg(39.9lb)	39.5kg(87.08lb)
Load Bearing	40kg(88.18lb)	40kg(88.18lb)	40kg(88.18lb)	300kg(661.39lb)
Color	Black	Black	Black	Black

Cabinets

Model	PFC200D-42U8D	PFC610-4D	PFC610-6D	PFC610-8D
Appearance				
Material	SPCC	SPCC	SPCC	SPCC
Dimension (WxDxH)	600mmx800mmx2055mm (23.62"x31.5"x80.91")	489mmx275mmx47.6mm (19.25"x10.83"x1.87")	472mmx350mmx48mm (18.56"x13.78"x1.87")	472mmx550mmx48mm (18.56"x21.65"x1.87")
Weight	89kg (196.21lb)	1.6kg (3.53lb)	1.9kg (4.19lb)	2.8kg (6.17lb)
Load Bearing	300kg (661.39lb)	40kg (88.18lb)	40kg (88.18lb)	40kg (88.18lb)
Color	Black	Black	Black	Black

VIDEO MANAGEMENT SOFTWARE

DSS Products

	Model	DSS Express V1.00.003.2	DSS Pro V7.02.005.1	DSS4004-S2 V1.01.000.1	DSS7016D(R)-S2 V1.01.001.1
Appearance					
Deployment	OS	Windows	Windows	Linux	Linux
	Form	Software	Software	ALL-IN-ONE	ALL-IN-ONE
	Hot standby	--	Supported	Supported	Supported
	Distribute	--	Supported	--	Supported
	N+M	--	Supported	--	Supported
	Cascade As Superior Level	--	Supported	--	--
	Cascade As Subordinate Level	Supported	Supported	Supported	Supported
Performance	Camera	256	1000 IP, 2000 CH	256	500 IP, 1000 CH
	Face Recognition	8	100	32	100
	ANPR	8	64	32	64
	Maximum Video Input Bandwidth Per Server	350Mbps	600Mbps	350Mbps	600Mbps
	Maximum Storage Bandwidth Per Server	150Mbps	600Mbps	150Mbps	600Mbps
	Onvif	Supported	Supported	Supported	Supported
Features	Auto Register	--	Supported	--	Supported
	P2P	Supported	--	--	--
	Microsoft Active Directory	--	Supported	--	Supported
	Disk Group	--	Supported	--	Supported
	ISCSI	Supported	Supported	Supported	Supported
	Records backup from device by time or wifi	--	Supported	--	Supported
	GIS Map	--	Supported	--	Supported
	Thumbnail search	--	Supported	--	Supported
	Access Control,Video Intercom, Visitor Management, Entrance	Supported	Supported	Supported	Supported
	Attendance	--	Supported	--	--
	Perimeter Protection	Supported	Supported	Supported	Supported
	Thermal Alarm	Supported	Supported	Supported	Supported
	AI	Face Recognition	Supported	Supported	Supported
Flow Analysis		Supported	Supported	Supported	Supported
ANPR		Supported	Supported	Supported	Supported
Object detection		--	Supported	--	Supported
Add on	Add-ons	--	Supported	--	--

VIDEO MANAGEMENT SOFTWARE

DMSS



Digital Mobile Surveillance System
Monitor Anything with Your SmartPhone or Tablet Anytime, Anywhere



Devices	Supported Devices	DVR, NVR, IPC, VTO, DoorBell, Alarm Hub
	Add Device Method	IP/domain, SN, Import form cloud, Soft AP
	Features	Remote config, Alarm config, HDD info, Share device list
Video	Compression Format	H.265/H.264/MPEG-4/JPEG
	Display Resolution	Up to 1920--1080
Live Preview	Max. Channels Can Be Opened at The Same Time	256
	Features	Snapshot, Record, Instant playback, PTZ, Stream control, Talk, Audio, Alarm, Color, Favorites, Remember channels
Playback	Video Playback Duration	24 hours
	Features	Snapshot, Record, Speed up / slow down, Frame-by-frame, Cut
Alarm Push	Alarm Type	Motion Detectin, Camera Masking, Local Alarm, Disk alarm (no disk, low space, disk error), Face Detection, IVS Alarm, Thermal Imaging Alarm, Defocus, Audio Detect, HDD Alarm, Sensor Alarm, Network Alarm
	Push Type	Video, Preview

DORI DISTANCE (D/O/R/I)


Find the Optimal Camera for Your Customized Surveillance Needs

The DORI distance is a “general proximity” of distance which makes it easy to pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specification and lab test results according to EN 62676-4 that defines the criteria for Detect, Observe, Recognize, and Identify, respectively.

- Detect: 25ppm
- Observe: 63ppm
- Recognize: 125ppm
- Identify: 250ppm

NETWORK CAMERAS


WizSense 3 Series

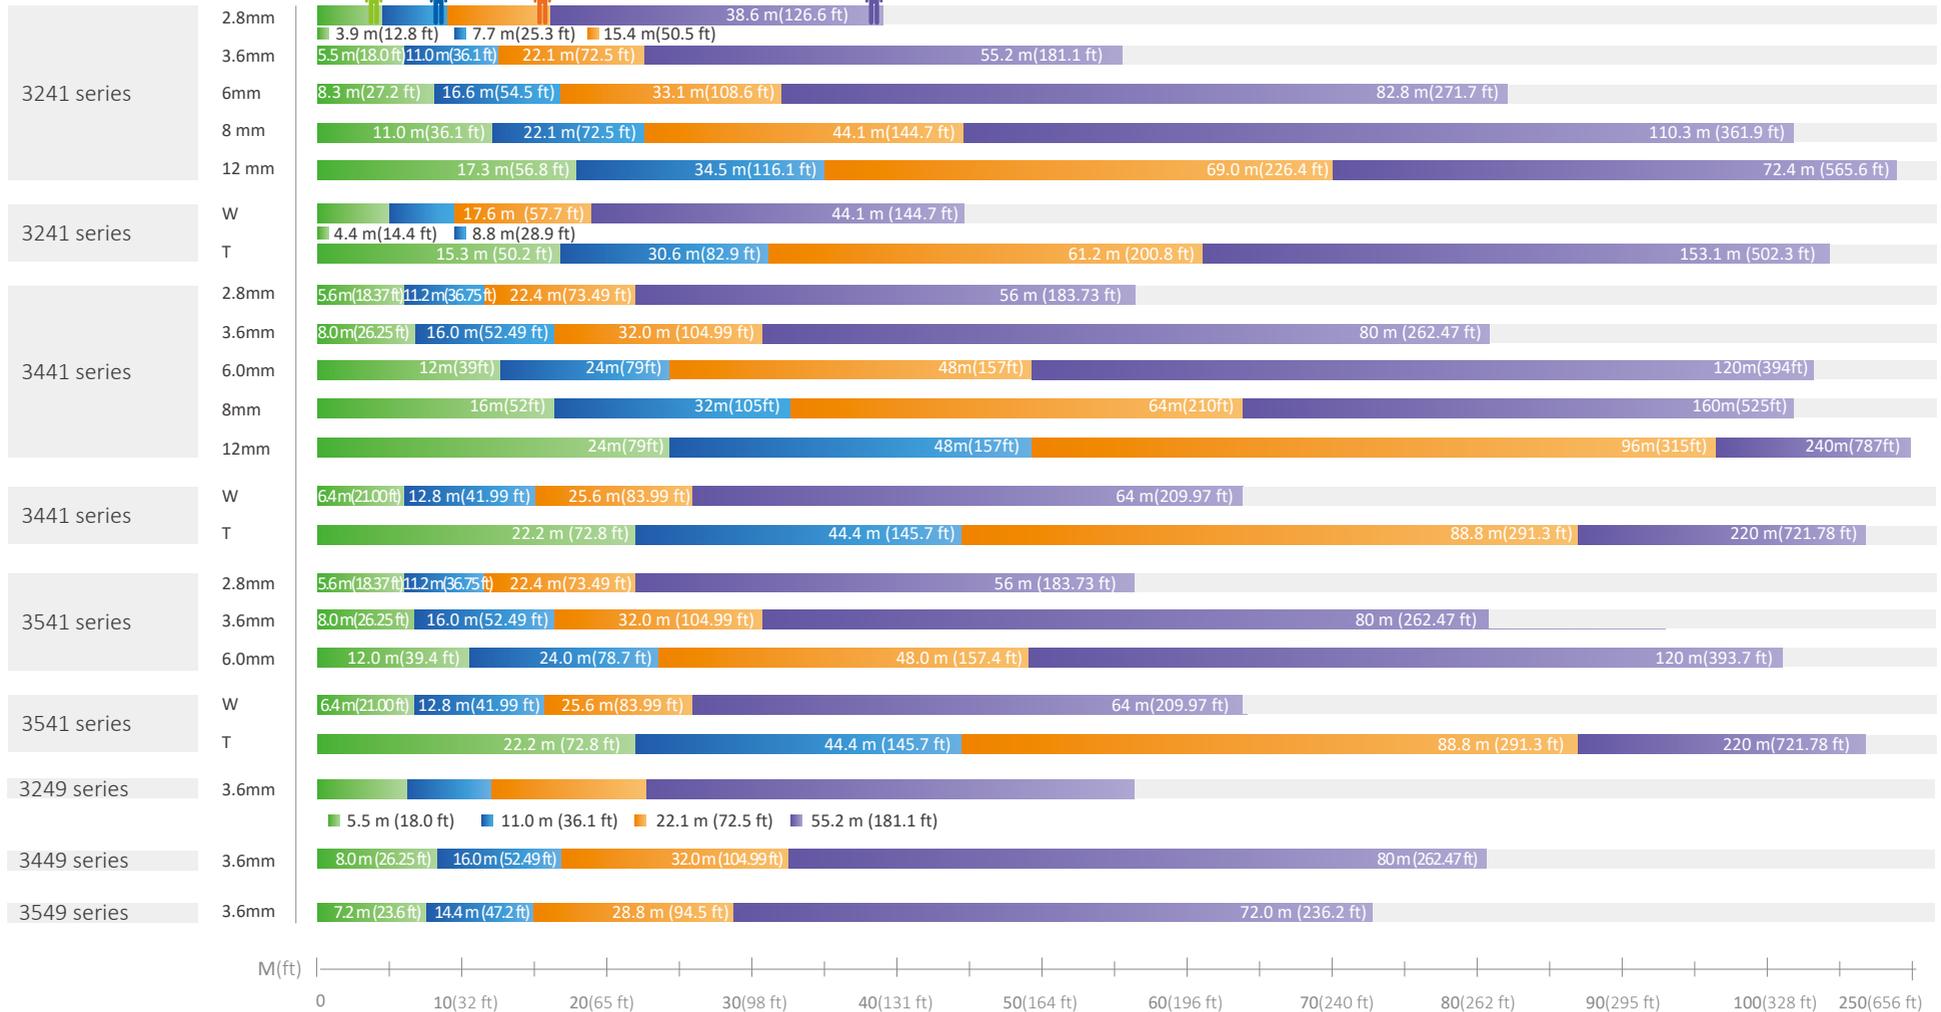

DORI DISTANCE (D/O/R/I)

NETWORK CAMERAS


Lite Series

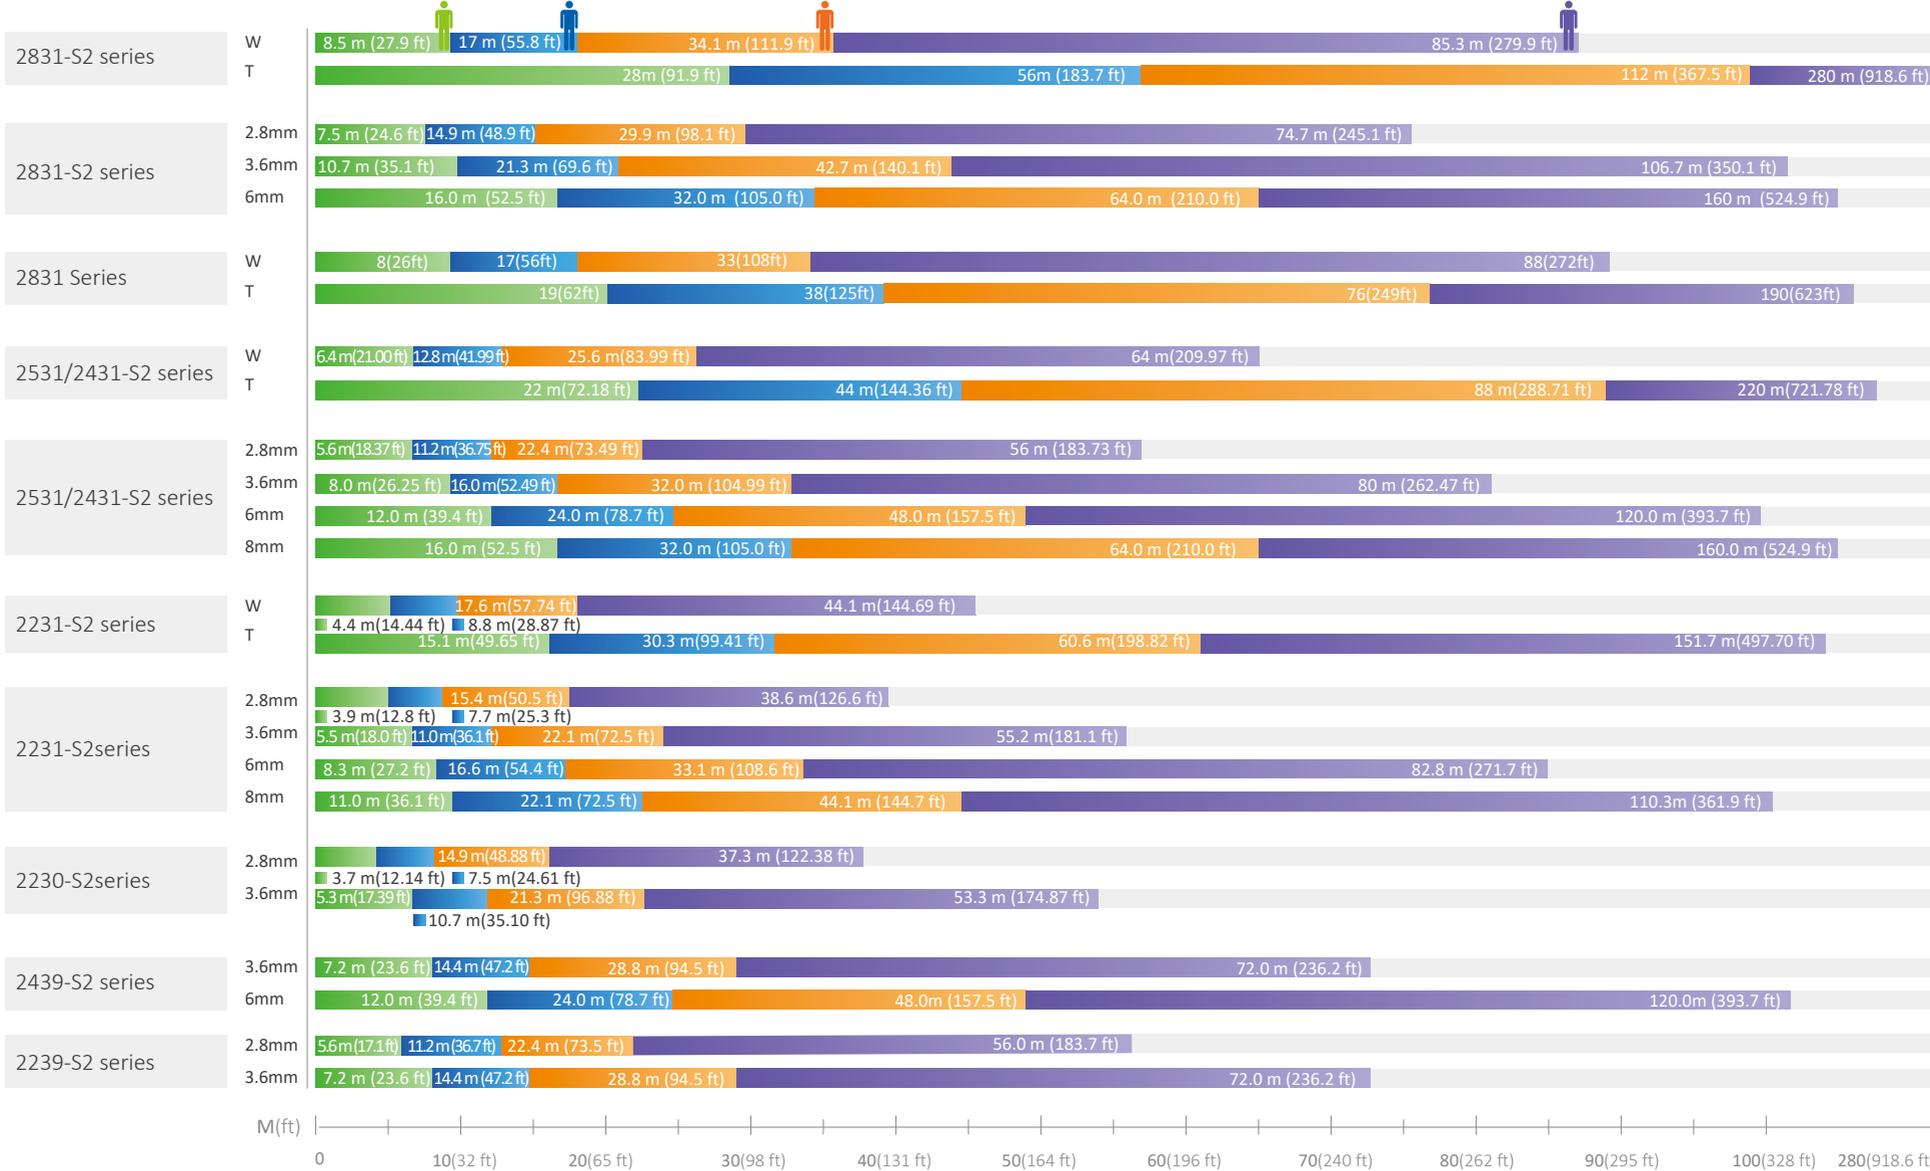


DORI DISTANCE (D/O/R/I)

NETWORK PTZ CAMERAS

WizSense Series

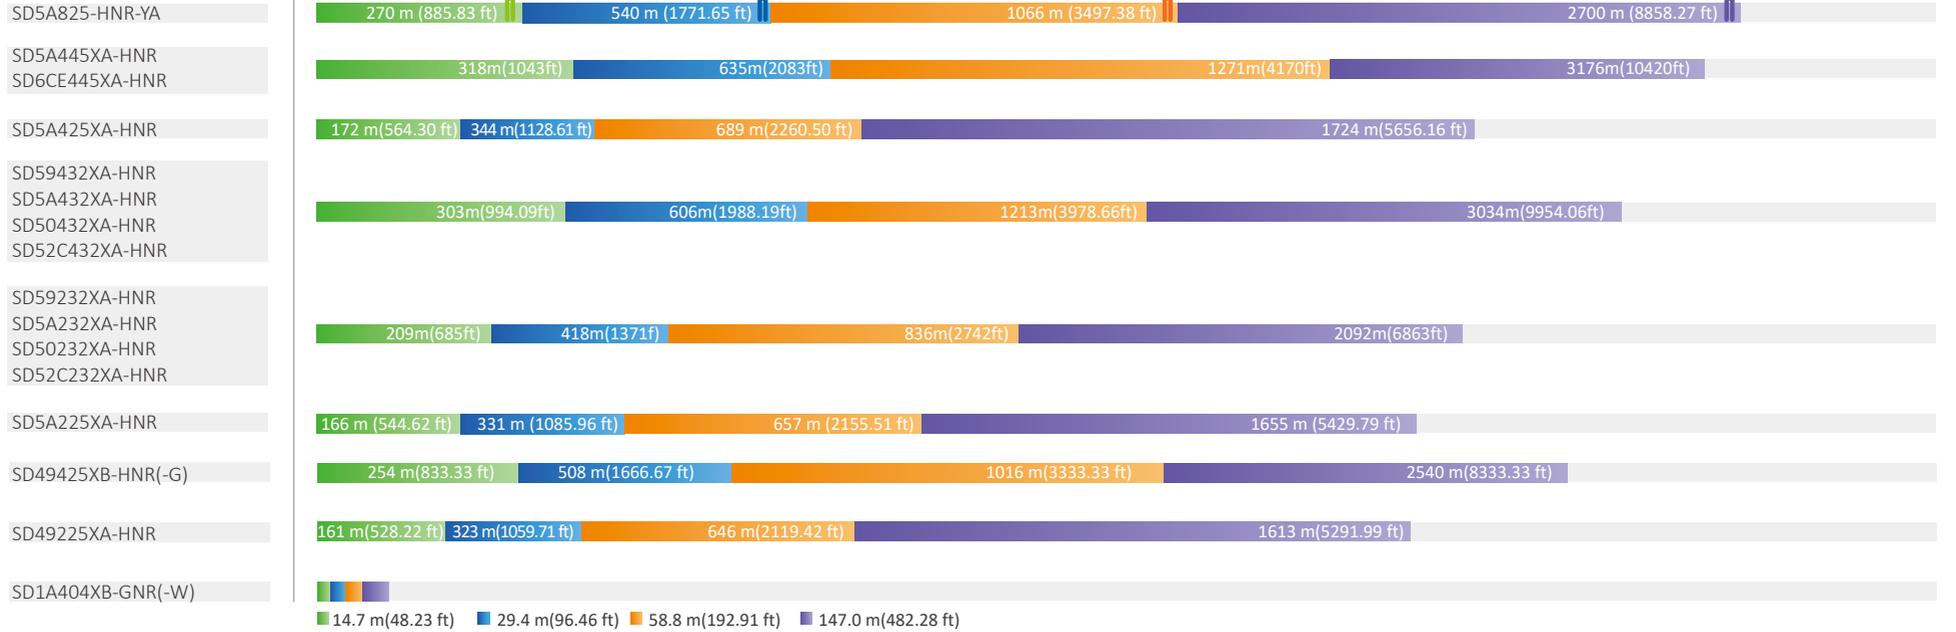


Pro Series

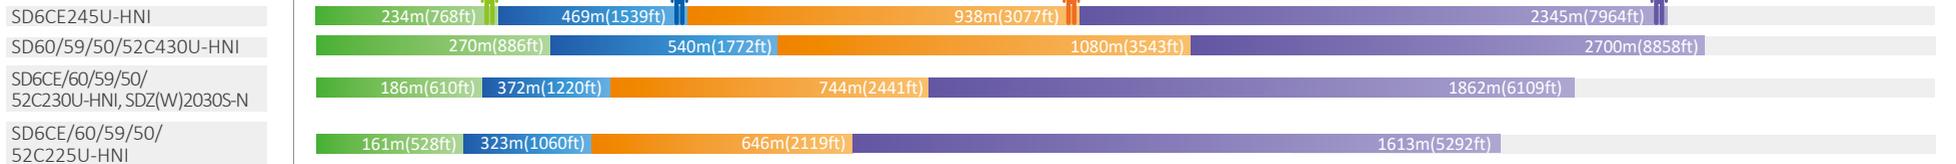


DORI DISTANCE (D/O/R/I)

NETWORK PTZ CAMERAS


Lite Series / Wi-Fi Series

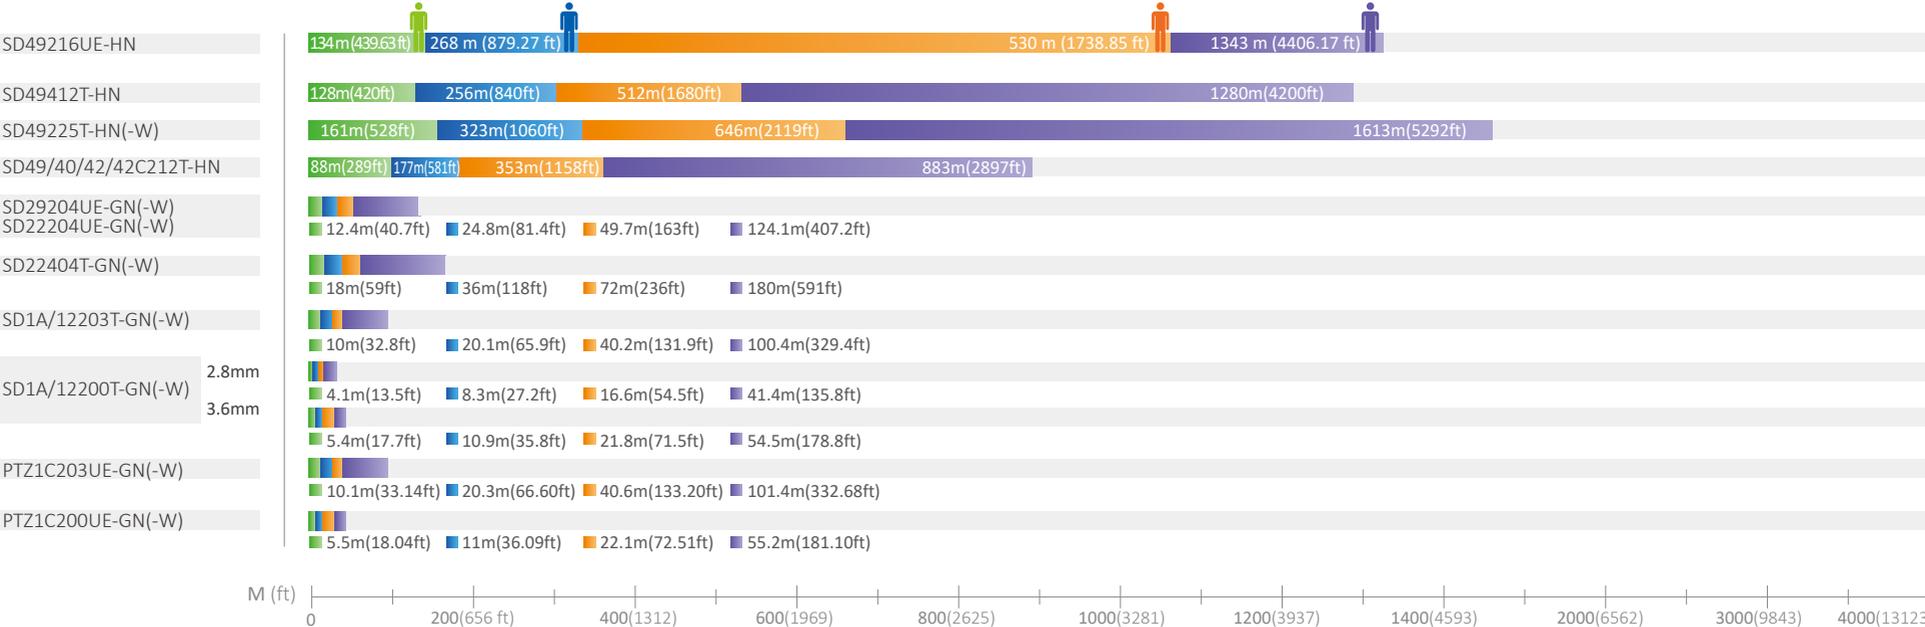

All-environment Series (AI)

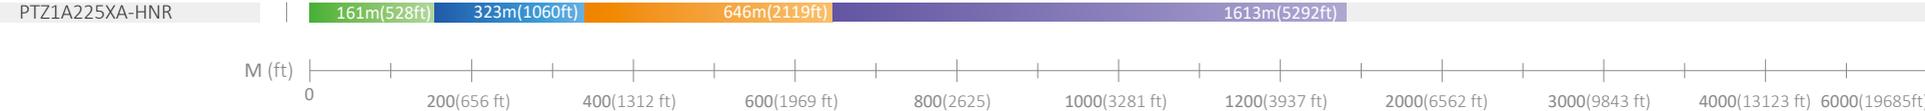

All-environment Series (Non-AI)



DORI DISTANCE (D/R/I)

NETWORK THERMAL CAMERAS

■ Detection distance
 ■ Recognition distance
 ■ Identification distance


The DRI (Detection Recognition Identification) is defined in terms of the number of pixels on the object depend on a common standard, Johnson's criteria [http://en.wikipedia.org/wiki/Johnson's_criteria].

Detection: Distinguish objects from backgrounds [Something is there]
 Required minimum pixels: Human 3.6 pixels, Vehicle 3 pixels


Recognition: Distinguish classification of objects [Human, Vehicle or Building]
 Required minimum pixels: Human 14 pixels, Vehicle 12 pixels

Identification: Identify characteristic of objects [Soldier, Pickup truck or Hospital]
 Required minimum pixels: Human 28 pixels, Vehicle 24 pixels

People (1.8m×0.5m)

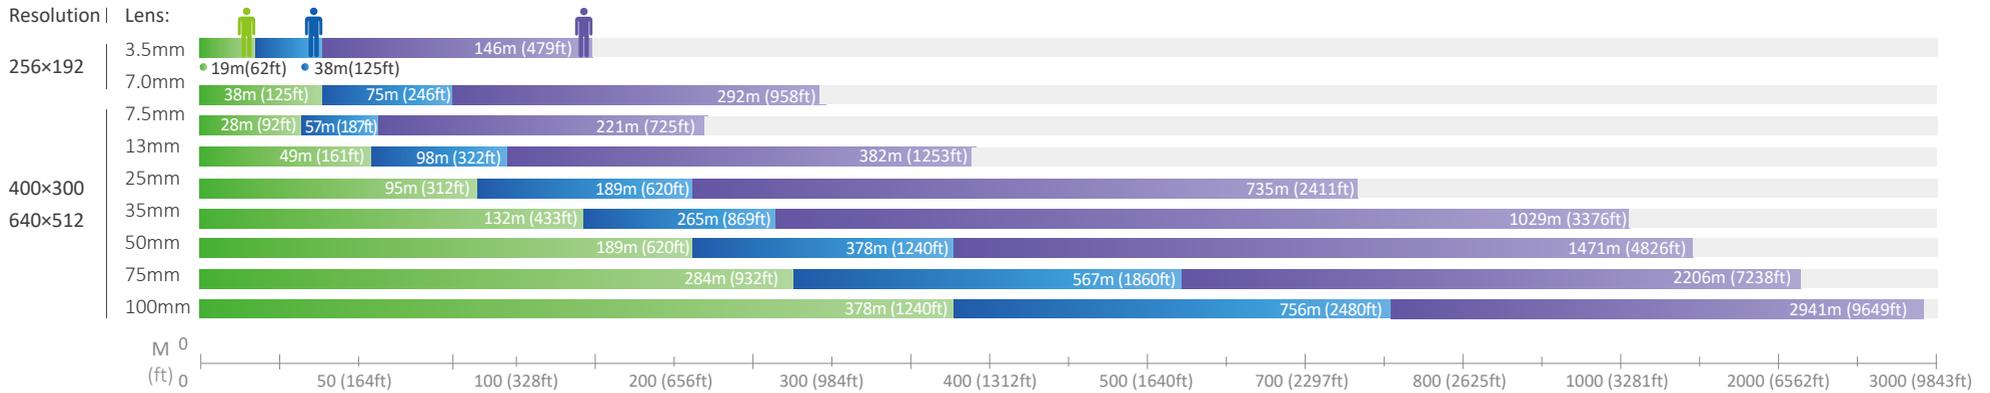

Vehicle (4.0m×1.4m)

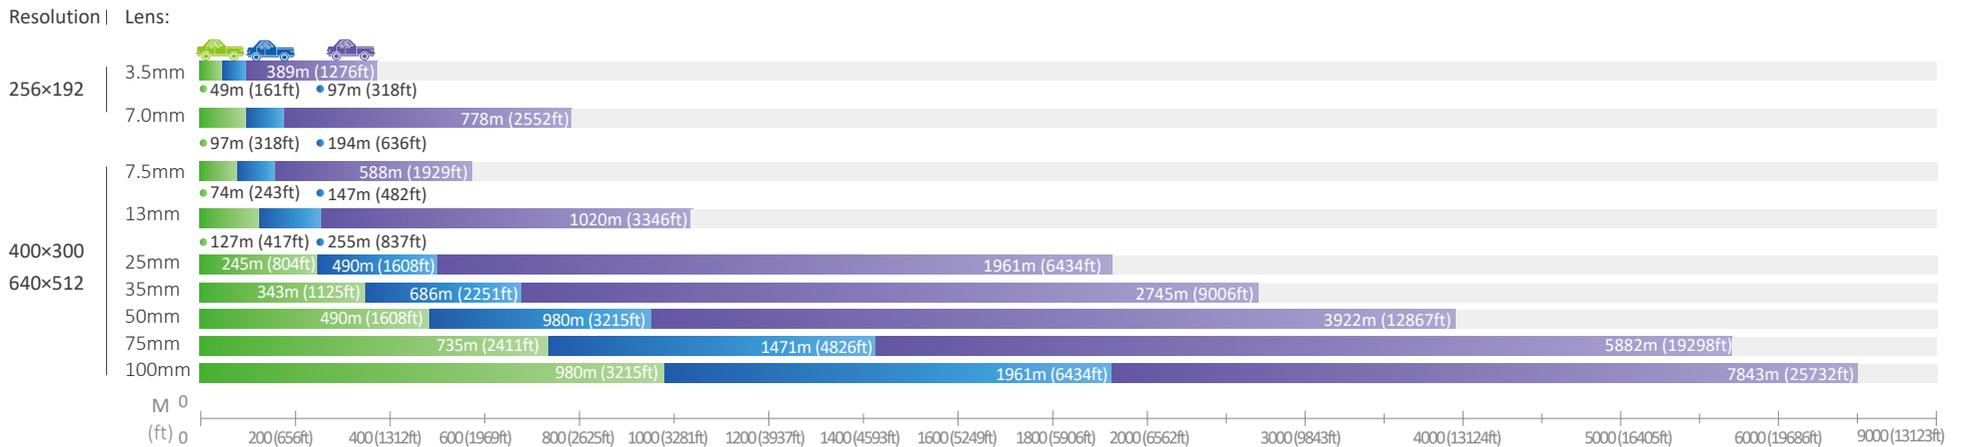

ENABLING A SAFER SOCIETY AND SMARTER LIVING

Dahua USA

Tel: +1 (949) 679-7777
Email: sales.usa@dahuatech.com
support.usa@dahuatech.com

Dahua Mexico

Tel: +52 55 67231936
Email: sales.mx@dahuatech.com
support.mx@dahuatech.com

Dahua Colombia

Tel: +571 7446110
Email: sales.co@dahuatech.com
support.co@dahuatech.com

Dahua Brazil

Tel: +55 11 32511871
Vendas: comercial.br@dahuatech.com
Suporte Técnico: suporte.br@dahuatech.com

Dahua Perú

Tel: +511 500-8555
Email: sales.pe@dahuatech.com
support.pe@dahuatech.com

Dahua Chile

Tel: +56 232705421
Email: sales.cl@dahuatech.com
support.chile@dahuatech.com

Dahua Argentina

Email: project.ar@dahuatech.com

Dahua Panama

Email: sales.pa@dahuatech.com
Support: support.pa@dahuatech.com

Dahua Thailand

Tel: +66 2541 5188
Email: info.th@dahuatech.com
hr.th@dahuatech.com

Dahua Singapore

Tel: +65 65380952
Email: sales.sg@dahuatech.com

Dahua Turkey

Email: sales.tr@dahuatech.com
support.tr@dahuatech.com

Dahua Malaysia

Tel: +60376620731
Email: sales.my@dahuatech.com

Dahua Indonesia

Tel: +62 811 867 7728
Email: sales.indo@dahuatech.com

Dahua S.Korea

Tel: +82 7081618889
Email: sales.kr@dahuatech.com
support.kr@dahuatech.com

Dahua India

Tel: +91 1244569100
Email: sales.india@dahuatech.com

Dahua Russia

Tel: 8 (499) 682-60-00
Email: info@dahuatech.com

Dahua Kazakhstan

Tel: +7 727 3110838
Email: sales.kz@dahuatech.com

Dahua VISION LLC

Tel: +998 (78) 1488666
E-mail: dh_uzbekistan@dahuatech.com

Dahua UK

Tel: +44(0)1628 613 500
Email: sales.uk@dahuatech.com

Dahua the Netherlands

Tel: +31 (0) 79 799 96 96
Email: sales.benelux@dahuatech.com

Dahua Iberia

Tel: +34 917649862
Email: sales.iberia@dahuatech.com

Dahua Italy

Tel: +39 362182681
Email: sales.italy@dahuatech.com

Dahua Germany

Tel: +49 211 20544121
Email: sales.de@dahuatech.com

Dahua France

+33 1 48 53 70 53
Email: sales.france@dahuatech.com

Dahua CEE & Nordic

Tel: +48 223957400
Email: dh.cen@dahuatech.com

Dahua Poland

Tel: +48 223957400
Email: biuro.pl@dahuatech.com

Dahua SRB

+38 1 (11) 4429999
Email: dh.srb@dahuatech.com

Dahua Denmark

Email: Nordic.ne@dahuatech.com

Dahua Hungary

Tel: +36 17899852
Email: sales.hu@dahuatech.com

Dahua Bulgaria

Tel: +35929950013
Email: support.bg@dahuatech.com

Dahua SRL

Email: marketing.ro@dahuatech.com

Dahua Czech

Tel: +420 225 986 001
Email: admin.cz@dahuatech.com

Dahua S. Africa

Email: sales.za@dahuatech.com

Dahua Australia

Tel: +61 299285200
Email: sales.oc@dahuatech.com

Dahua Middle East

Tel: +971 48815300
Email: sales.me@dahuatech.com
info.me@dahuatech.com

* Design and specifications are subject to change without notice.

Ver. H2, Aug 2020

DAHUA TECHNOLOGY

No.1199 Bin'an Road, Binjiang District, Hangzhou, China. 310053
Tel: +86-571-87688883 Fax: +86-571-87688815
Email: overseas@dahuatech.com
www.dahuasecurity.com

